
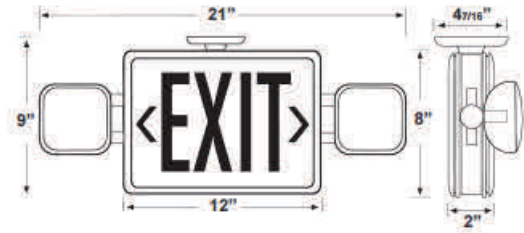


**DIMENSIONS:**

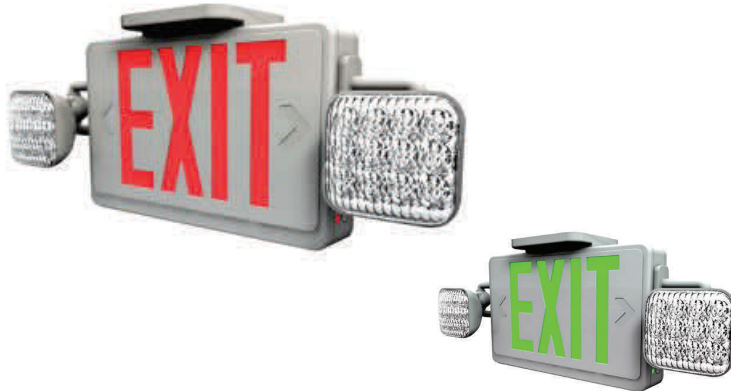

**XT-CL-RW-EM**  
**XT-CL-GW-EM**

**Combination LED Exit Sign & LED Emergency**

High impact thermoplastic energy-efficient LED exit with emergency battery backup

Standard

Optional



**ELECTRICAL SPECIFICATIONS:**

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing
- 9.6V Long-life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

**HOUSING SPECIFICATIONS:**

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- EZ snap-out Chevron directional indicators

**LIGHTING SPECIFICATIONS:**

- Long lasting, efficient ultra-bright white LED lamp heads
- 1 watt (8 LEDs x 0.125 watt) per head • High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing
- Long-life, energy efficient Red or Green LED exit sign illumination

**MOUNTING:**

- EZ-snap mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

**WARRANTY:**

- Five-year warranty on all electronics and housing
- Battery pro-rated for five years

**CERTIFICATIONS:**

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, local and state codes



JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

# XT-CL-RW-EM XT-CL-GW-EM

## Combination LED Exit Sign & LED Emergency

### ORDER INFORMATION:

MODEL	LETTERS	FACEPLATE	TRIMPLATE	VOLTAGE	BATTERY
XT-RW-EM	Red	Universal Single/Double	White	120/277	Ni-Cad
XT-GW-EM	Green	Universal Single/Double	White	120/277	Ni-Cad
XT-RB-EM	Red	Universal Single/Double	Black	120/277	Ni-Cad
XT-GB-EM	Green	Universal Single/Double	Black	120/277	Ni-Cad

### OPTIONS:

- SDT: Self-diagnostic test feature continually diagnoses unit's performance and tests system to ensure reliable operation and to meet electrical and life safety codes.
- 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time
- Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act

### ELECTRICAL INFORMATION:

MODEL NO	INPUT WATTS (W)	INPUT WATTS (W)	INPUT AMPS (A)	INPUT AMPS (A)
	120V	277V	120V	277V
XT-R/XT-G	3.8	3.8	0.034	0.020

