


## LED Flood Light

LED Flood Light 10, 20, 30, 50,100,150, 200W

### Order Information

Model NO.	Input Watts.	Input Volts.	Delivered Lumens	Efficacy (lm/w)	CCT	CRI	Power Factor	Weight	Equivalent Wattage
PQLV-FL-B10W-5000K	10.67W	100-277V	908.653	85.16	5072K	83.2	0.906	0.6kg	30W
PQLV-FL-B20W-5000K	20W	100-277V	1,800	90	5000K	70	0.95	2kg	75W
PQLV-FL-B30W-5000K	30W	100-277V	2,700	90	5000K	70	0.95	2kg	120W
PQLV-FL-B50W (5000K)	51W	100-277V	4,633.779	90.86	5144K	83.3	0.927	3kg	175W
PQLV-FL-B100W (5000K)	103.424W	100-277V	9,305.23	91.15	5278K	83.4	0.963	7kg	250W
LOD-FL-150W50K0HL (With Nichia 3030 LED)	150W	100-277V	19,000	127	5000K	75	0.95	9kg	400W
LOD-FL-200W50K-HL (With Nichia 3030 LED)	200W	100-277V	24,500	123	5000K	75	0.95	9kg	500W

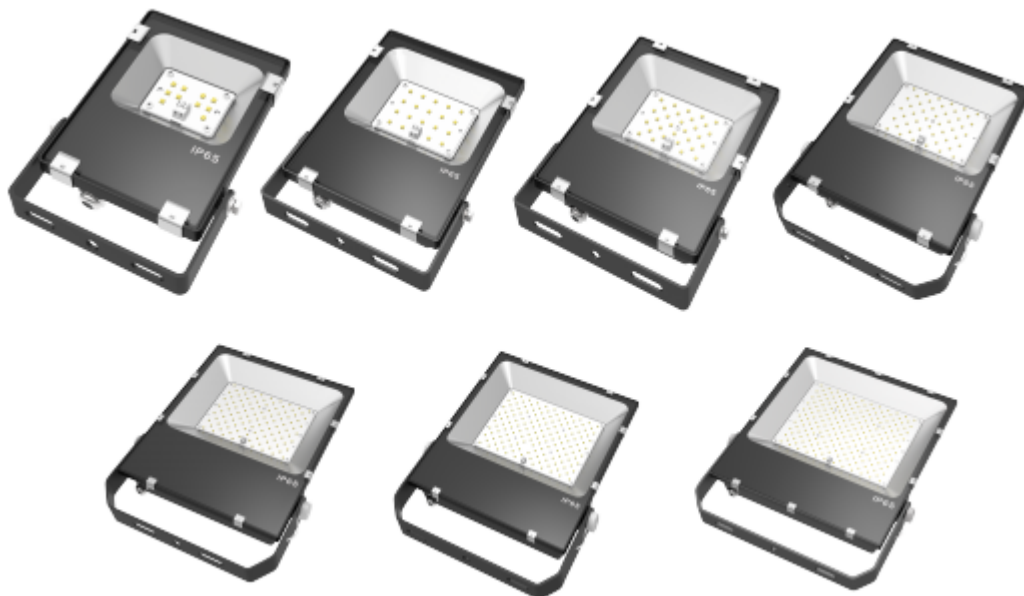

### Specification

Frequency	Lense	Dimmable	Beam Angel	Sensor	Operating Temperature
50/60Hz	Clear	Yes (optional)	120°	yes (optional)	-4°F-104°F
IP Rating	THD (%)	LED Chip	Life Time	Warranty	Materials
IP65	≤20%	Philips	>50000hrs	5 years	Alluminum Alloy

### Description

- Use Philips SMD 3030 LED chips
- Mercury Free: no UV
- Heatsink: Adopt 6063 Aluminum alloy