

LEDone


Projects:

Comments:

200 W LED Flood Light

SPECIFICATIONS:

WATTAGE:	200W
MODEL #:	ODFL-600HSW-200W ODFL-600HSW-200WHV
DLC #:	ZR-FL-200W35MZ
UL #:	E464812
CERTIFICATIONS:	UL, cUL, FCC, CE, PSE, RoHS, DLC
LUMENS OUTPUT (IES):	17,000LM
EFFICACY (IES):	80-90 LM/W
VOLTAGE:	AC100-277V
POWER FACTOR:	0.9 minimum
POWER CONSUMPTION:	200W
KELVIN (CCT):	5000/5700
CRI:	≥80
IP RATING:	IP65
BEAM ANGLE:	120° Degrees
LIFE SPAN (HOURS):	50,000 Hours
DIMMING COMPATIBLE:	No
LENGTH OF WARRANTY (YEARS):	5 Years Standard
MOUNTING OPTIONS:	Wall, Ceiling or Pole Mounting
DIMENSIONS (L X W X H)	344x465x197mm (13.54x18.3x7.76 in)
WORKING ENVIRONMENT:	-30°C to 40°C (-22°F to 104°F)
WEIGHT:	8.52 kg (18.78 lbs)
SUGGESTED REPLACEMENT FOR:	600W
PERCENTAGE OF WATTAGE SAVED:	75%

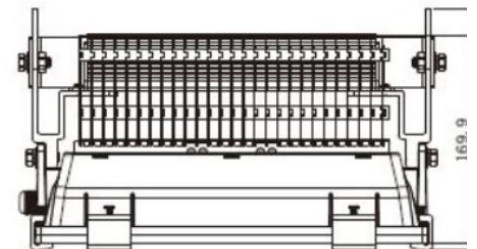

Features:

Utilizes the special design and multichip single module. Imported high brightness semiconductor chips. High heat conductivity, low luminous decay, pure light color and no ghosting. Integrative design for heat sink and housing. The LED is closely connected to the surface. The heat from the LED is removed through the heat dissipation wing and also by air ventilation. The surface is passed through anodic oxidation treatment. It has good capacity like antisepticing, waterproofing, and dust prevention.

Applications:

Can be used for both indoors and outdoors. General flood lighting, corridor, lighting, security lighting, roof top lighting, bulletin, billboards, spot poles, flag poles.

