

LED Strips Light



Pre-set CCT			
1	2	1	2
30K	40K		
1	2	1	2
50K	OFF		

Advantage:

- Input voltage is AC 100-277 V
- CCT Tunable 3000K & 4000K & 5000K
- Multiple power regulation: 40W
- 5 years warranty
- Mounts to almost any surface, multiple options
- Excellent Beam Angle 120 Degrees

Product description:



LED strip is ideal for replacing traditional fluorescent lamp. It has multiple advantages. Easy installation: surface, hanging or continuous row mount. Available in standard and high voltage. 0-10V dimming. Motion sensor and emergency battery for option, Excellent for Offices, Warehouse, Garage, Shopping Mall, School, and many more applications.



Standard Accessories:




Optional Accessories:



LED Strips Light

Specifications:

Unit : inch(mm)

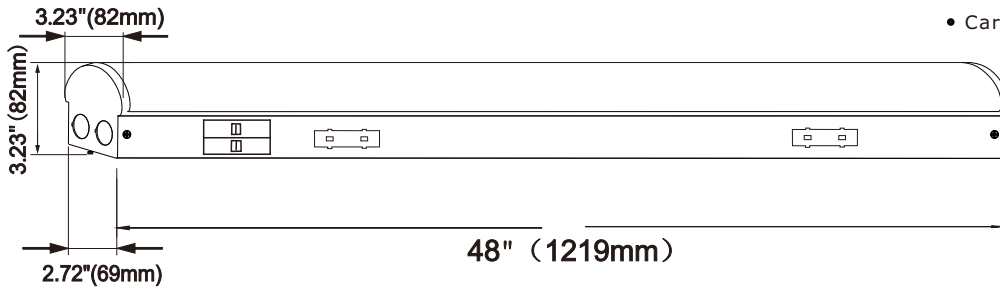




Structure Features

- Shell materials: Aluminum & PC.
- Finish: White
- Net weight : 1.77Kg (3.9 lbs)
- Product Size: 1219mmX82mmX82mm
48''X3.23''X3.23''
- Carton Size: 1284.9mmX189.9mmX195.1mm
50.59''X7.48''X7.68''(4Pcs/CTN)

Technical Parameters:

WSD-ST4FT40W27-345K			
Power	40W	Beam Angle	120°
Input Voltage	AC100-277V	Lighting Source	2835 LEDS
PF	>0.90	Lens	Frosted PC
Driver Efficiency	>90%	Working Temperature	-20 - +40°C
Luminous Flux	4929Lm	Storage Temperature	-40 -+80°C
Color Temperature	3000K/4000K/5000K	Protection Level	IP20
CRI	Ra>80	Cable	ON Cable
Optional dimming function	0-10Vdc	SystemEfficacy(Lm/w)	> 120 Lm/w

Photometry:

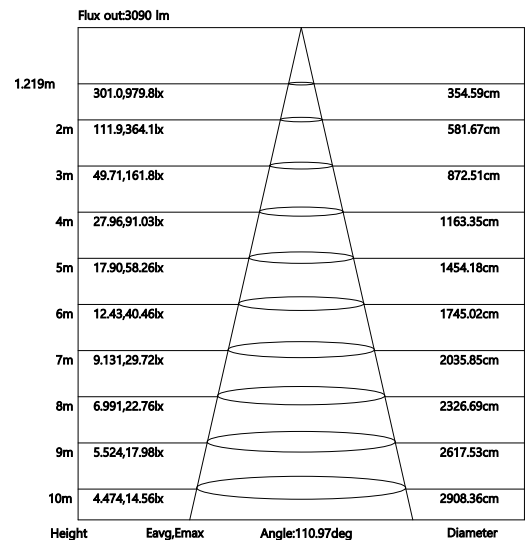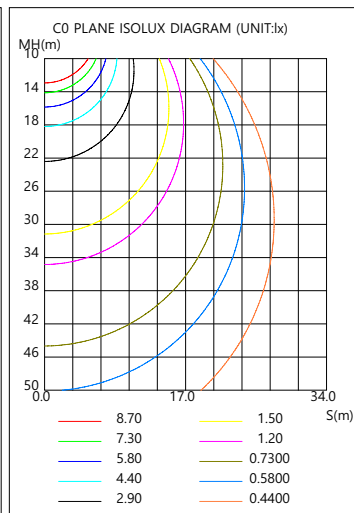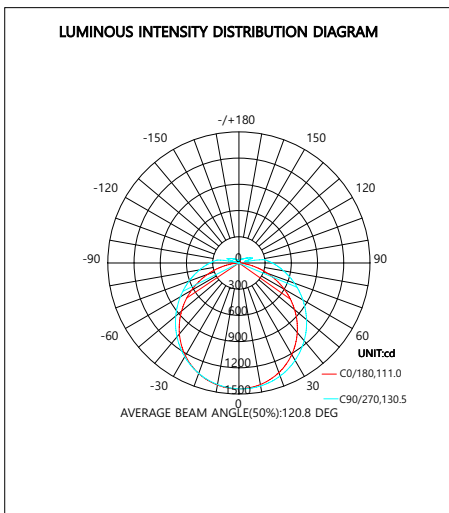


Example:WSD-ST4FT40W27-345K

WSD	ST	4 FT	40W	27	345K
Company	Product	Size	Power	Voltage	Color Temp
WSD LED INC	LED Strip Light	4FT(4feet)	40W(40W)	AC100-277V	3K(3000K) 4K(4000K) 5K(5000K)


LED Strips Light

Mounting :


CHAININSTALLATION(Standard Installation)



Step1. Insert a chain on each hook and insert hooks into the installationholes




Step 2. Attach the chains tothe ceiling and adjust till balanced and secured



Step3. Take wires from the shielded cables, connect AC wires and Dimming wires(if needed)




Step4. Wrap the wires with metal materials




Step5. Optional seamless infinite splicing


CHAININSTALLATION(Optional)




Step1. Snap buckles into the lamp body

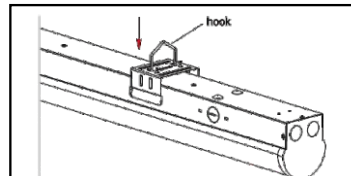


Step 2. Attach the hooks at the slotted holes of buckles




Step3. Hook buckles with pendant cord and suspend the light to the desired height

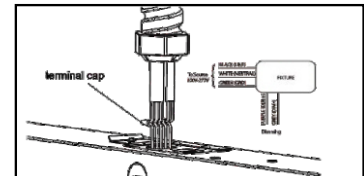


Step4.Take wires from the terminal caps, connect AC wires and Dimming wires(if needed)



Step5.Insert the terminal blocks and wires into the strip

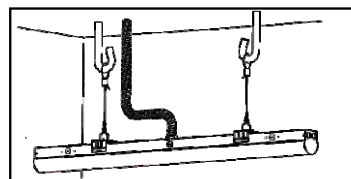


Step6. Insert the wire terminal joints to the wire entry




Step7. Optional seamless infinite splicing


SURFACEMOUNTEDINSTALLATION(Optional)




Step 1. Fix the buckles in parallel y screws with 27" distance between each buckle



Step 2.Take wires from the terminal caps, connect AC wires and Dimming wires(if needed)



Step3. Secure the strip with buckles

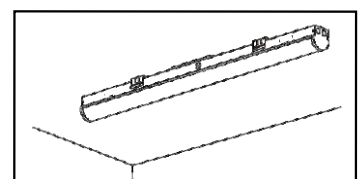

Step4. Installation is completed