

SLIM LED TROFFER

CCT & Wattage Switchable




Application: offices, schools, showrooms, airports, retail locations, and healthcare facilities

Slim LED Troffer - Features

FEATURES


- CCT Switchable: 3000K/ 4000K/ 5000K
- Power Switchable
- 0-10V Dimming
- Aluminum Heatsink for Efficient Heat Dissipation
- Diffusers: extruded impact modified acrylic for increased durability
- High efficiency: 130lm/w, DLC premium listed
- 5 years of warranty




Slim LED Troffer- Dimensions




33W/40W/50W

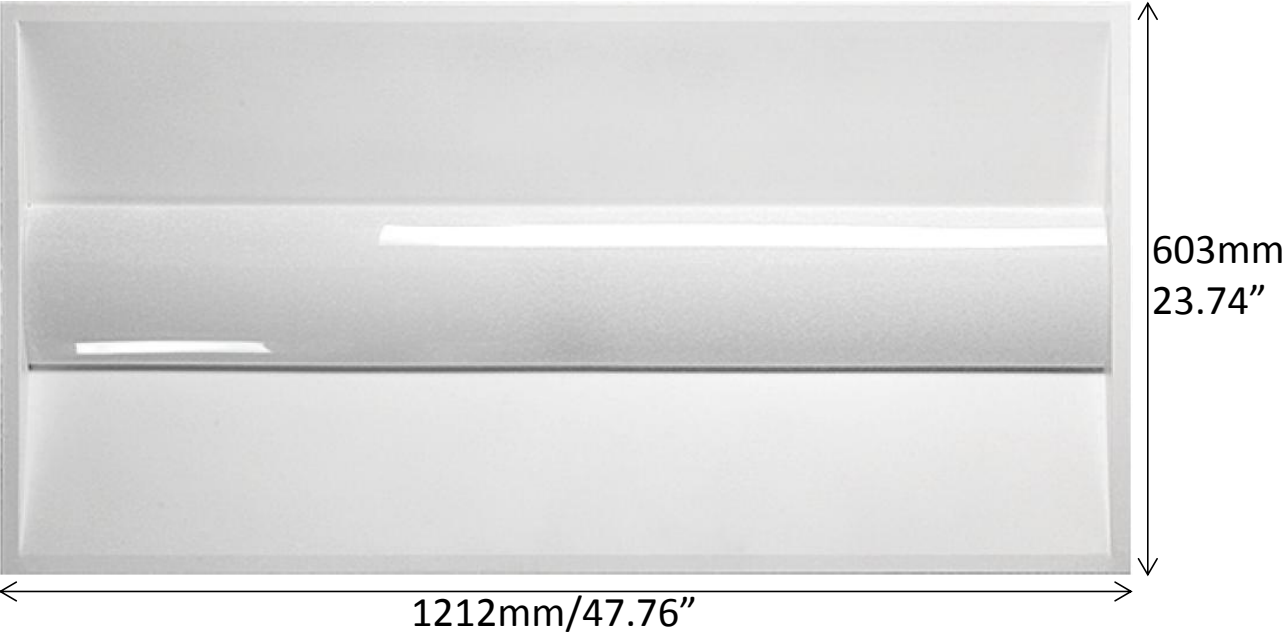

25W/35W

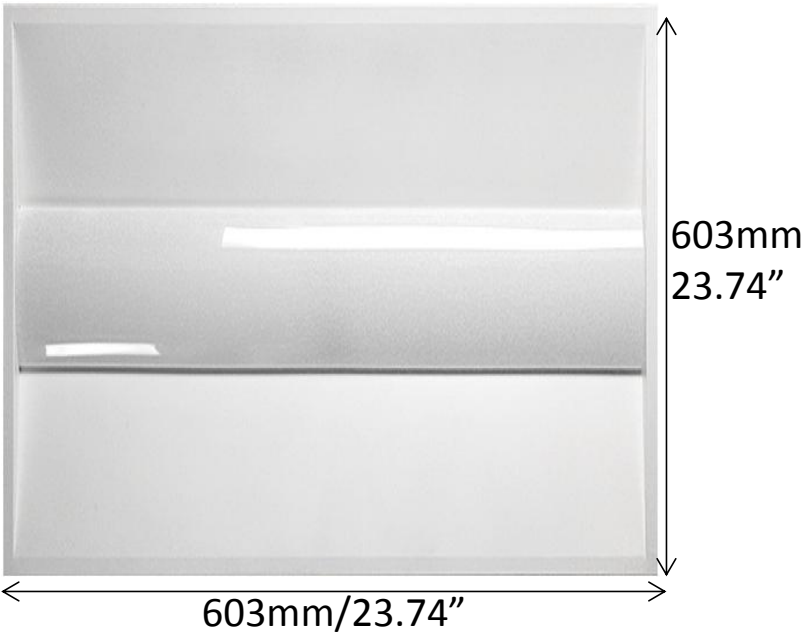

Side View

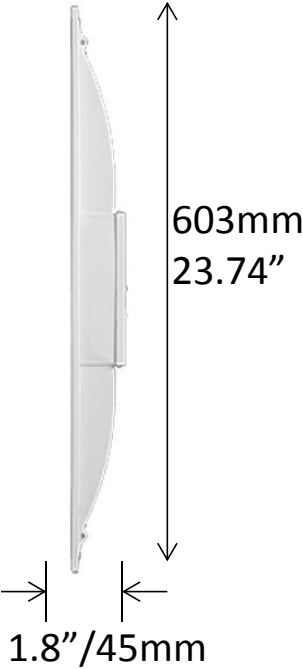

Slim LED Troffer – CCT & Wattage Tuning Switch




Double Switch for CCT & Watt tuning

Watt tunable options:


- | 2x4' | 2x2' |
|-------|-------|
| ▶ 33W | ▶ 25W |
| ▶ 40W | ▶ 35W |
| ▶ 50W | |

CCT tunable options:


- ▶ 5000K
- ▶ 4000K
- ▶ 3000K

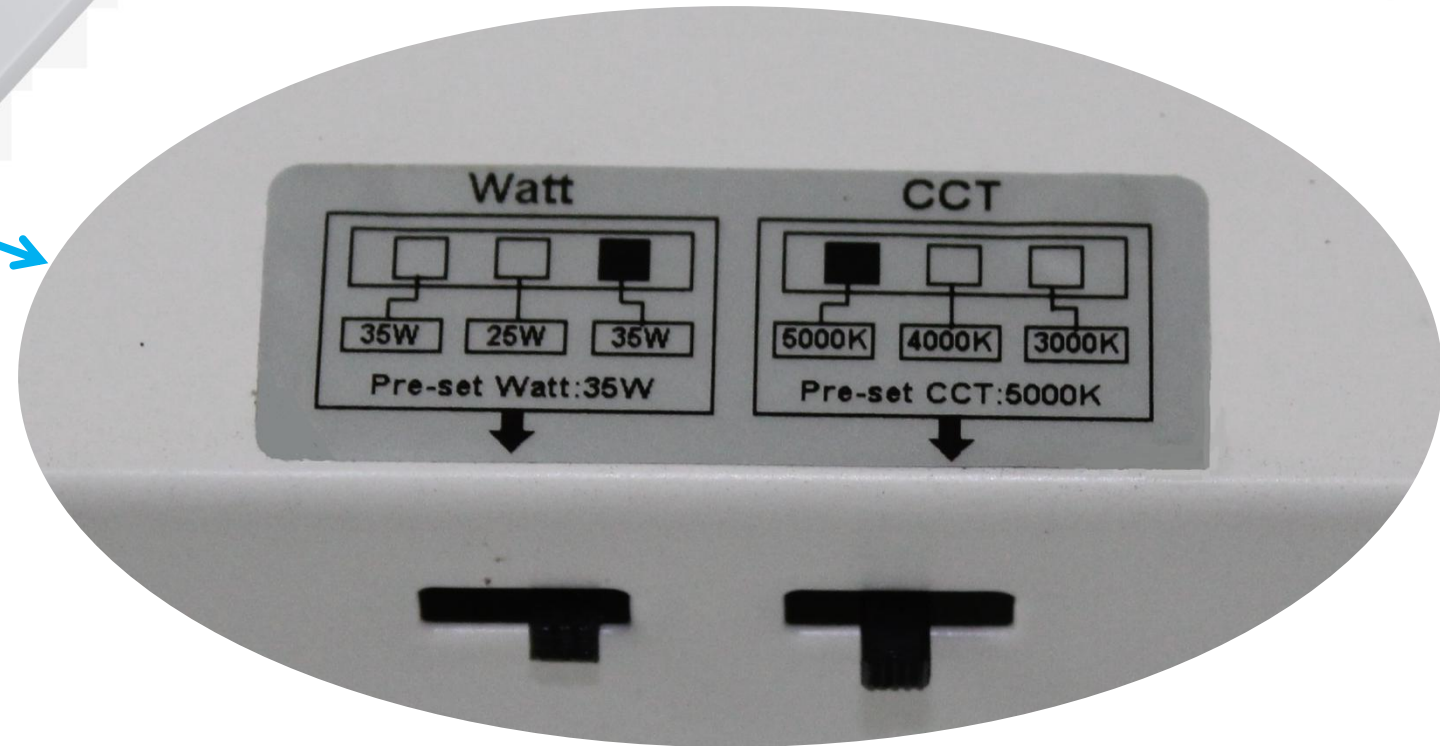

Slim LED Troffer - CCT & Wattage Tunable Fatures

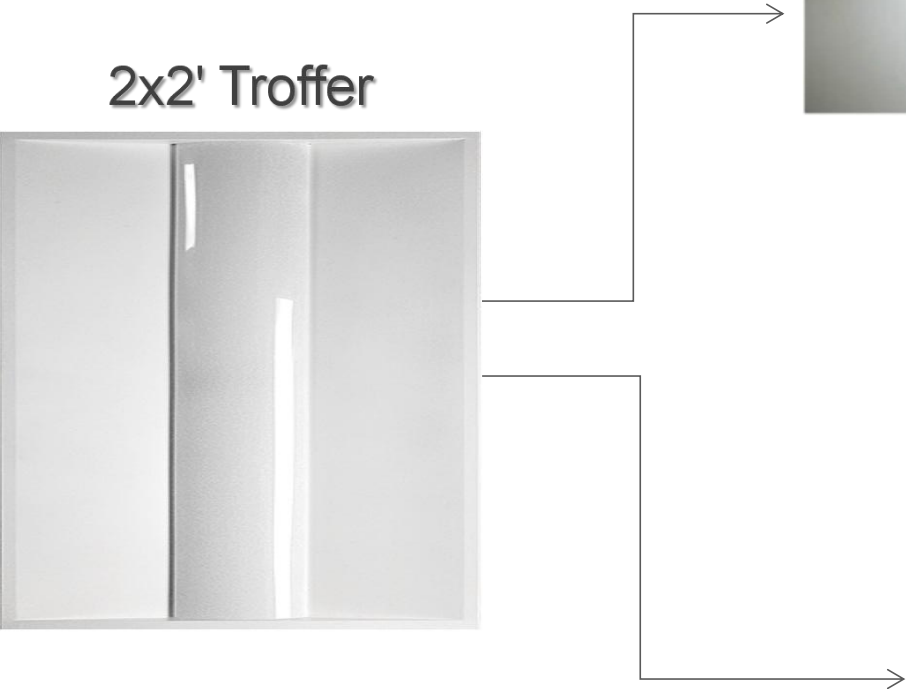

Switchable CCT

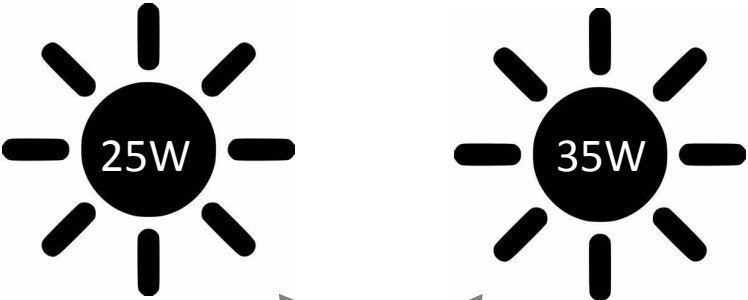


Switchable Wattage

Slim LED Troffer - CCT & Wattage Tunable Fatures



Switchable CCT

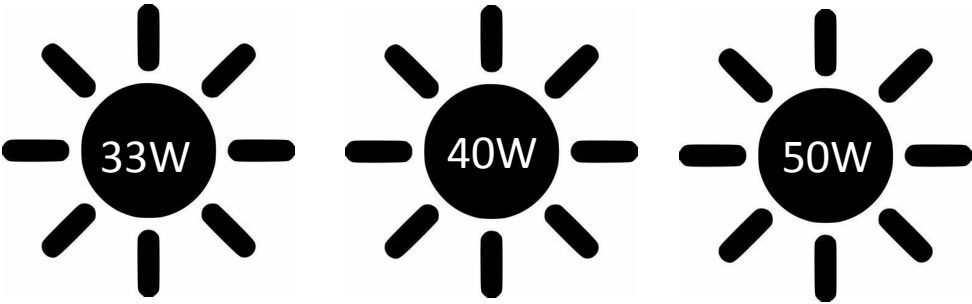

Switchable Wattage

Slim LED Troffer - Technical Data

Technical Data


Model No.	DM-TRP-XXW2X2-XXK	DM-TRP-XXW2X4-XXK
Power:	25W/35W	33W/40W/50W
Size:	2'x2'	2'x4'
Input Voltage:	110-277 VAC	
Lumen	3250 LM/4550 LM	4290LM/5200LM/6500 LM
Protection Rating	IP20 (For Indoor Use Only)	
Power Factor:	0.95	
Beam Angle	110°	
CCT:	CCT Tunable (3000K/4000K/5000K)	
CRI:	>80 Ra	
Working Life:	Lumen Maintenance over 70% @ 50,000+ Hours	
Oper. Temperature	-4°F ~+105°F / -15°C ~+40°C	
Product Size:	23.74"x23.74"x1.8"	23.74"x47.76"x1.8"
Qty/Master Pack	2	2
Master Pack Size:	25.78"x25.78"x4.15"	25.8"x49.6"x4.15"
Master Pack Weight	15.6LB	31.9LB



Slim LED Troffer - Installation



1. **Turn OFF power** to the fixture at the breaker panel before installation.
2. Remove existing lamps, door frame (if applicable), reector and ballast cover. Depending on clearance space, ballast may need to be removed.
3. Connect the BLACK/BROWN lead to LINE(+) supply lead. Connect the WHITE/BLUE lead to NEUTRAUCOMMON (-) supply lead.
4. Connect the GREEN lead to GROUND supply lead.
5. If any, connect PURPLE/BLUE to 0-10V SIGNAL supply lead and GREY/WHITE to 0-10V NEUTRAUREFERENCE supply lead.
6. For safety, bend the end of the hook to the right with 90 degrees and attach the hook on the housing onto the T-Bar

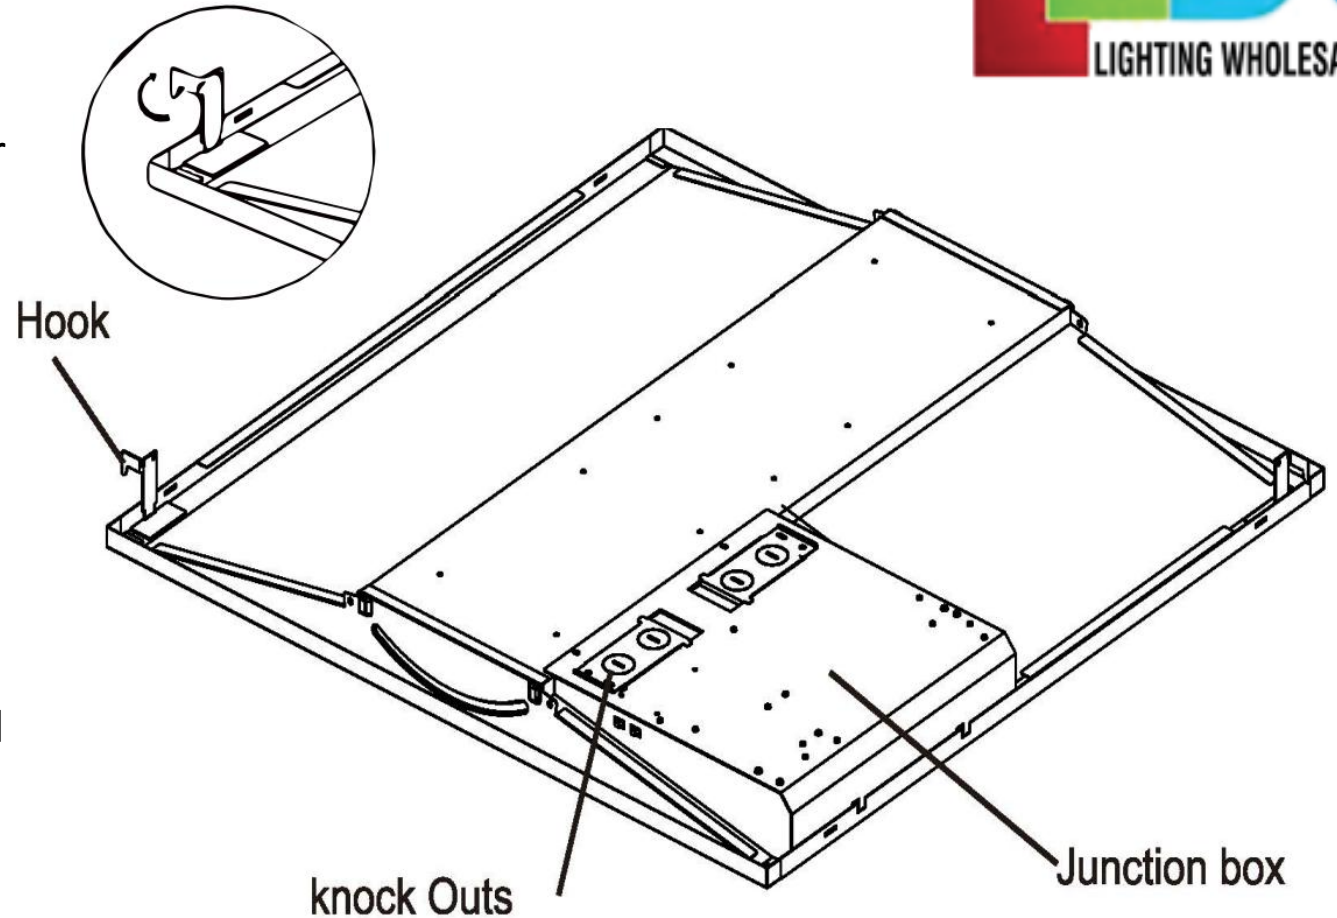

Slim Troffer Light Distribution

