

## MaxLite® LED Vaporproof Jelly Jar (with lamp)

**MaxLite®**

### General Safety Information

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For Residential installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- **DO NOT INSTALL DAMAGED PRODUCT!**
- This fixture is intended to be connected to a properly installed and grounded UL listed junction box.



Picture is for illustration purposes only. Your model may vary.

### **WARNING:**

#### RISK OF ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

### **CAUTION:**

#### RISK OF INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

### **CAUTION:**

#### RISK OF FIRE

- Keep combustible and other materials that can burn away from luminaire and lamp/lens
- **MIN 60°C SUPPLY CONDUCTORS**




# MaxLite® LED Vaporproof Jelly Jar (with lamp)

## General Wiring Diagram

**⚠ WARNING**

**CAUTION:** Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.

Note that the fixtures are supplied with two 150°C leads. The white lead is to be connected to the neutral and the black lead to the power (line) lead. Attach ground wire to junction box “GRD” by means of green screw. Grounding for pendant mount fixture is by means of attaching wire to “GRD” on fitter backing using green screw provided. Make all wiring connections in accordance to local and NEC wiring procedures. Be sure any unused wiring entrances are closed with closure plugs provided.






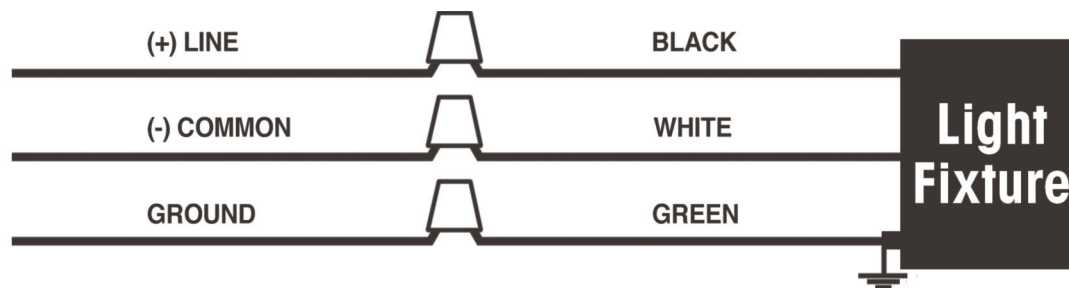


## Installation

### Ceiling Mount:

Lighting Fixture must be located on ceiling, lamp socket opened down, and not be recessed and cannot be mounted upside down in wet locations.

1. Turn off power to branch circuit.
2. Unscrew wire guard and globe.
3. Remove cast adaptor plate from base junction box by removing two 5/8" long screws.
4. Attach the round base junction box to ceiling with screws provided by others. **(Fig. 1)**
5. Apply weatherproof silicone sealant between ceiling and base junction box to ensure a weatherproof installation.
6. Run conduit to junction box if application calls for it and pull supply leads into junction box. Use the wire extensions if needed to leave at least 6" of leads showing.
7. Make wiring connections, following General Wiring Diagram above. Be sure to secure any loose wiring connections safely inside junction box. **(Fig. 2)**
8. Align gasket using the two 5/8" long screws and secure adaptor plate to the junction box. **(Fig. 3)**
9. Install "Enclosed Rated" self ballasted LED lamp (as provided.) Maximum 100W incandescent rated use per UL. **(Fig. 4)**



...Continued on Pg. 3



# MaxLite® LED Vaporproof Jelly Jar (with lamp)

## Installation





### Ceiling Mount (Continued)

10. Thread the globe and guard onto adaptor plate and tighten set screws. Be sure not to cross thread. **(Fig. 5 & 6)**
11. Seal all holes, plugs and conduit entrances with weatherproof silicone sealant. Teflon tape use on threads is acceptable sealant means.
12. Restore power to branch circuit.

### Wall Mount:

Lighting Fixture must be located on Wall, lamp socket opened down, and not be recessed and cannot be mounted upside down in wet locations.

1. Turn off power to branch circuit.
2. Unscrew wire guard and globe.
3. Remove cast adaptor plate from base junction box by removing four 3/4" long screws.
4. Attach the round junction box to wall with screws provided by others. **(Fig. 1)**
5. Apply weatherproof silicone sealant between wall and junction box to ensure a weatherproof installation.
6. Run conduit to base junction box if application calls for it and pull supply leads into base junction box. Use the wire extensions if needed to leave at least 6" of leads showing.
7. Make wiring connections, following General Wiring Diagram (see pg. 2). Be sure to secure any loose wiring connections safely inside base junction box. **(Fig. 2)**
8. Align gasket using four 3/4" long screws and secure adaptor plate to the base junction box. **(Fig. 3)**
9. Install "Enclosed Rated" self ballasted LED lamp (as provided.) Maximum 100W incandescent rated use per UL. **(Fig. 4)**
10. Thread the globe and guard onto adaptor plate and tighten set screws. Be sure not to cross thread. **(Fig. 5 & 6)**
11. Seal all holes, plugs and conduit entrances with weatherproof silicone sealant. Teflon tape use on threads is acceptable sealant means.
12. Restore power to branch circuit.



## MaxLite® LED Vaporproof Jelly Jar (with lamp)



### Warranty Information

MaxLite Inc. warrants its products for a minimum period of **FIVE (5)** years from the earlier of the actual installation date or 90 days after the original date of purchase from a MaxLite authorized distributor/dealer (the “Warranty Period”), as follows: If a Product fails to operate during the Warranty Period as a result of defects in materials or workmanship, MaxLite will, at its option, repair it, replace it with the same or like Product.

Please refer to Maxlite’s website (at <http://maxlite.com/resources/warranties>) for the complete coverage details as well as the terms and conditions of our warranty. Please note that it is NOT a requirement to register your warranty in order to initiate a warranty claim unless a Ten Year warranty has been purchased separately, or when applicable and/or purchased separately, your warranty contains a replacement labor allowance.

### **Limitation of Liability**

THIS WARRANTY IS EXCLUSIVE, AND IS THE SOLE REMEDY FOR ANY AND ALL CLAIMS, WHETHER IN CONTRACT, IN TORT OR OTHERWISE ARISING FROM THE FAILURE OF PRODUCT AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ALL WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED TO THE EXTENT PERMITTED BY LAW AND, IN ANY EVENT, SHALL BE LIMITED TO THE WARRANTY PERIOD SPECIFIED ABOVE. THE LIABILITY OF MAXLITE SHALL BE LIMITED TO THE TERMS OF THE EXPRESS WARRANTY SET FORTH HEREIN. IN NO EVENT WILL MAXLITE BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES INCLUDING, WITHOUT LIMITATION, DAMAGES RESULTING FROM LOSS OF USE, PROFITS, BUSINESS OR GOODWILL, LABOR COSTS, REMOVAL OR INSTALLATION COSTS, WHETHER OR NOT MAXLITE HAS BEEN ADVISED OF THE POSSIBILITY THEREOF. UNDER NO CIRCUMSTANCES SHALL MAXLITE’S ENTIRE LIABILITY FOR A DEFECTIVE PRODUCT EXCEED THE PURCHASE PRICE OF THAT PRODUCT (EXCLUDING LABOR WARRANTY COVERAGE WHERE SPECIFICALLY OFFERED BY MAXLITE). WARRANTY SERVICES PROVIDED UNDER THESE TERMS AND CONDITIONS DONOT ENSURE THE UNINTERRUPTED OPERATION OF PRODUCTS; MAXLITE SHALL NOT BE LIABLE FOR DAMAGES CAUSED BY ANY DELAYS INVOLVING WARRANTY SERVICE.

This Warranty gives you specific legal rights and you may also have other rights that may vary from state to state. Because some states or jurisdictions do not allow the exclusion or limitation of liability for consequential or incidental damages, such limitation may not apply to you.