

LDS SERIES

OUTDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LDS-MCT-D-BZ





Customer Name: _____

Project Name: _____

Note: _____

Type: _____

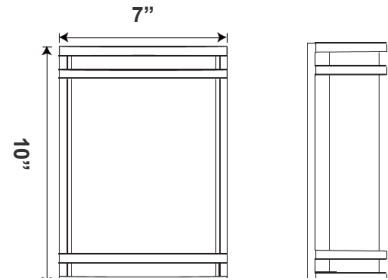

7" x 10" x 3 1/4"

MULTI-CCT



Selection:



Ideal for Hallways, bedrooms, laundry rooms, bathrooms, alleys,
Loading docks, doorway, pathway

Features

- Outdoor decorative sconce
- Multi CCT (Selectable Switch on the LED Board)
- Direct Replacement for Fluorescent
- Bronze Finish
- 7-Year Warranty
- Housing: Steel base with Die-cast Rings
- High-Transmission Frosted Plastic Lens With Excellent Distribution and Uniformity

Technical Specifications

Electrical:

- Voltage: 120V AC 50/60Hz
- Output Voltage: 36VDC
- Power Factor: >0.90
- Wattage: 12W
- Efficacy: 100 LPW
- Total Harmonic Distortion: ≤15 %

Mechanical:

- Bronze Finish
- Outdoor decorative sconce
- Housing: Steel base with Die-cast Rings
- High-Transmission Frosted Plastic Lens With Excellent Distribution and Uniformity
- Maximum Ambient Temperature: 50~113°F
- Rated life: 50,000 Hrs
- Wet Location

Lighting:

- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 1200LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Multi CCT (Selectable Switch on the LED Board)
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 120°

Applications:

- Hallways, bedrooms, laundry rooms, bathrooms, alleys, Loading docks, doorway, pathway.

Other Models:

- 12W | 1200LM | LDS-MCT-D





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-Z9-Z1-ZZ

Photometrics: LDS-MCT-D-BZ



BUG Rating: B0-U3-G1

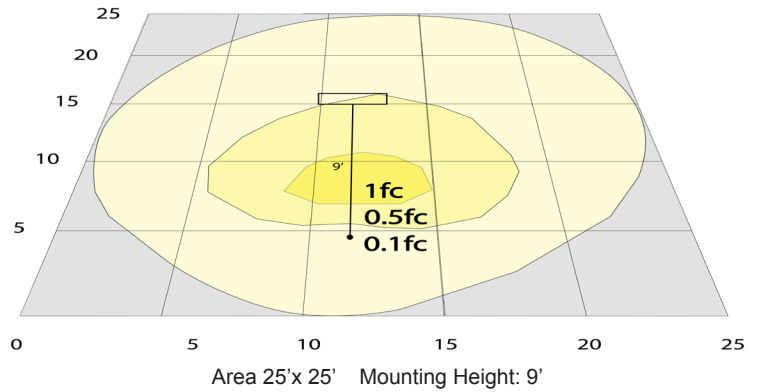

Other Views:



Side View



Front View



Back View

Performance Table: LDS-MCT-D-BZ

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LDS-MCT-D-BZ	12W	120V	1200LM	3000K/ 4000K/ 5000K	B0-U3-G1	100

Sample Ordering

Model	Color Temp.	Dimming	Finish			
LDS	-	MCT	-	D	-	BZ

Factory-Installed Option:

Blank = No Option For Accessories
 OPT-EM-LDS = EMERGENCY BATTERY BACKUP
 OPT-PC-B1 = BUTTON
 OPT-SEN-LDS-BR = PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR
 WEC-8RC = OPTIONAL REMOTE CONTROL

FACTORY-INSTALLED OPTION:



Example:

- LDS-MCT-D-BZ (FOR LDS 12W MCT FIXTURE 120V)
- LDS-MCT-D-BZ (FOR LDS 12W MCT FIXTURE 120V)
- OPT-EM-LDS (EMERGENCY BATTERY BACKUP)

