


## PRODUCT DESCRIPTION:

Designed to fit any ceiling surface. Suspended and hanging for other types of ceilings such as art galleries, homes, schools, offices, hotels, restaurants, retail stores and other commercial or industrial applications.

## FEATURES:

- Low maintenance
- Environmentally friendly
- No mercury
- Recyclable

## DIMENSIONS:

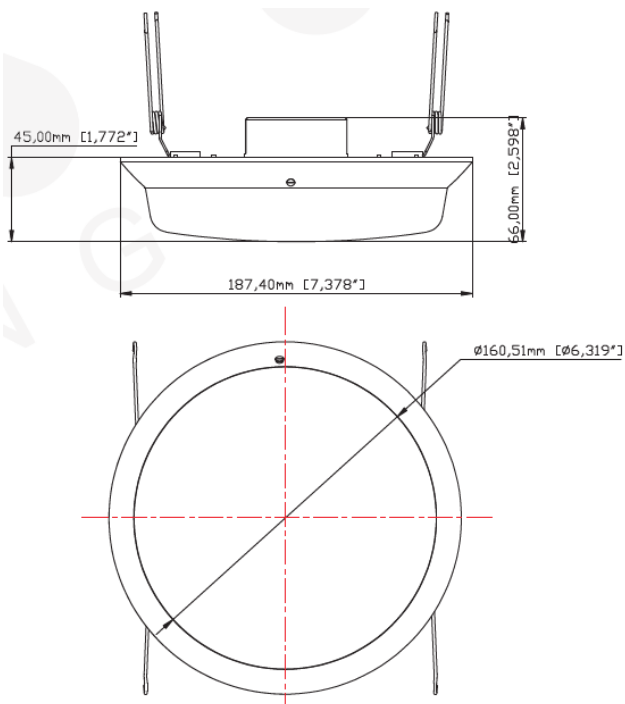

## 5/6" Surface Mount Downlight 10W Spec

LOD-DL56SM-AD10W-30K

LOD- DL56SM-AD10W-50K



**SPECIFICATIONS:**

SPECIFICATION	Details	
Model	LOD-DL56SM-AD10W-30K	LOD-DL56SM-AD10W-50K
Input Wattage (W)	10W	
Lumens Delivered (LM)	910LM	1,015LM
Efficacy (LM/W)	91.8LM/W	102.1LM/W
CRI	82	84
Lifespan	25,000 hours	
Color Temperature	3,000K	5,000K
Wattage Equivalent	75W	
Dimmable	Yes	
IP Rating	Damp Location	
Beam Angle	95	95
Input Voltage	AC120	
Power Factor	0.96	0.97
Housing	Aluminum	
Lens	Frosted	
Mounting	GU24	
Size	7.378" x 6.319" x 2.598"	
Certification	UL, FCC, CE RoHS, TUV, ISO9001	
Operating Temperature	-20°C to 50°C (-4°F to 122°F)	
Environment	Indoor	
Warranty	3 years limited	

