


Project Name:	Type:
Part Number:	Date:

# BYPASS PLL

## FEATURES


- Integral driver suitable for 120-277V
- Replaces 18W / 24W / 36W / 40W 4-pin (2G11) CFL lamps
- High efficacy up to 129 LPW
- Opaque glass eliminates pixilation and reduces glare
- Plastic film prevents glass from shattering
- Extra wide 280° light emitting area
- 16W / 17W models suitable for use in enclosed fixtures
- UL 1598C classified
- Temperature rating: -4°F/-20 °C- 95 °F/35 °C
- Rated lifetime (L70): 50,000hrs
- 5 year limited warranty
- Suitable for all indoor general lighting applications and damp locations

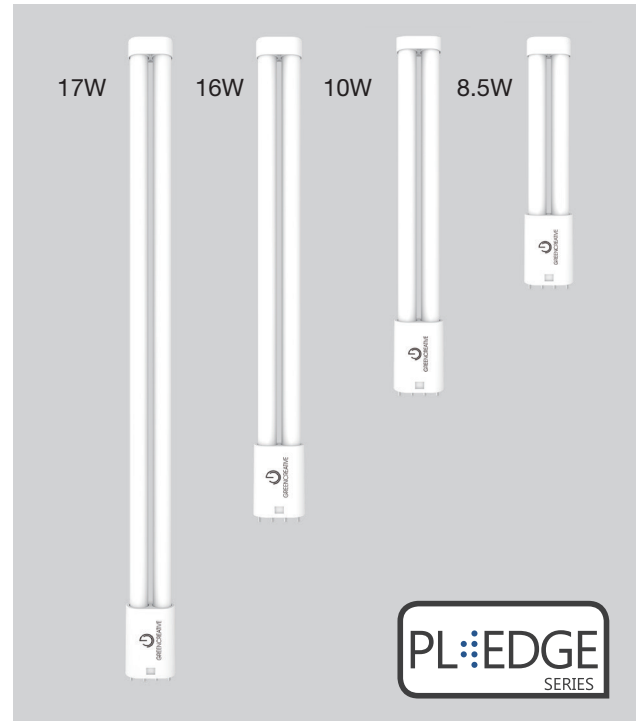

## SPECIFICATIONS

Product	Model	Equiv.	Input Voltage	Wattage	Lumens	CCT	CRI	Efficacy (LPW)	Beam Angle	Power Factor	THD	DIM.	Fixture Rating	Cert.
34858	8.5PLL/835/GL/BYP	18W	120-277V	8.5	950	3500K	82	112	160°	0.9	<20%	No	Non-Enclosed	-
34859	8.5PLL/840/GL/BYP	18W	120-277V	8.5	980	4000K	82	115	160°	0.9	<20%	No	Non-Enclosed	-
34861	10PLL/835/GL/BYP	24W	120-277V	10	1,200	3500K	82	120	160°	0.9	<20%	No	Non-Enclosed	-
34862	10PLL/840/GL/BYP	24W	120-277V	10	1,250	4000K	82	125	160°	0.9	<20%	No	Non-Enclosed	-
34864	16PLL/835/GL/BYP	36W	120-277V	16	1,950	3500K	82	122	160°	0.9	<20%	No	Enclosed	-
34865	16PLL/840/GL/BYP	36W	120-277V	16	2,000	4000K	82	125	160°	0.9	<20%	No	Enclosed	-
34866	17PLL/830/GL/BYP	40W	120-277V	17	2,050	3000K	82	121	160°	0.9	<20%	No	Enclosed	DLC
34867	17PLL/835/GL/BYP	40W	120-277V	17	2,150	3500K	82	126	160°	0.9	<20%	No	Enclosed	DLC
34868	17PLL/840/GL/BYP	40W	120-277V	17	2,200	4000K	82	129	160°	0.9	<20%	No	Enclosed	DLC

## DIMENSION & WEIGHT

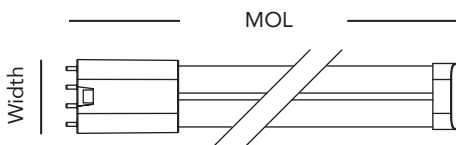

Model	8.5PLL/xxx/GL/BYP	10PLL/xxx/GL/BYP	16PLL/xxx/GL/BYP	17PLL/xxx/GL/BYP
Base	2G11	2G11	2G11	2G11
MOL	8.9"	12.7"	16.4"	22.5"
Width	1.7"	1.7"	1.7"	1.7"
Weight	0.20lb	0.25lb	0.30lb	0.38lb

Where xxx means 824-965 which indicates CRI and color temperature.


Project Name:	Type:
Part Number:	Date:

# BYPASS PLL

## INSTALLATION


Step 1.

Cut all wires connected to the ballast, remove the ballast

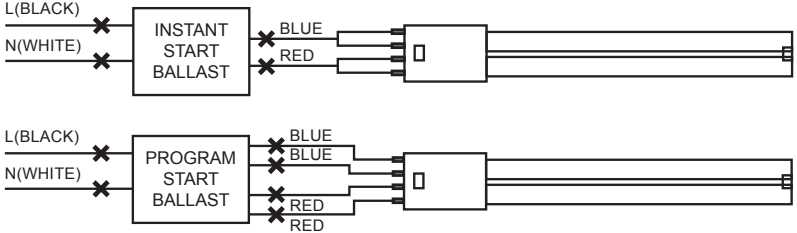



Step 2.

Rewire the fixture according to the wiring configuration



## ACCESSORY ORDERING INFORMATION

Product	Model	Description	Picture	Dimension	Weight
58012	35EMINVERTER	Emergency Inverter 35W			6.50lb

- Fixtures must be installed within 250' of inverter
- UL 924 listed for field installation
- Suitable for damp locations
- Galvanized steel enclosure with 36" conduit for wiring connections to the fixture
- Includes test switch and charge indicator accessory kit
- Replaceable and recyclable long-life high temperature nickel-cadmium battery