

LED Slim Adjustable Wallpack Light

Product Description

Slim wall pack is available in two sizes for a variety of applications including building perimeter, entrances, stairways and security lighting. Luminaries provide a low-profile architectural style with the power of bright, energy efficient LEDs. It has a rugged aluminum construction with multi-mount capabilities. 0° to +90° tilt adjustments. For a building that has a modern or futuristic look.



Advantage

- UL DLC certificate.
- Lumiled Chip, high CRI.
- IP65 driver, input voltage 120-277VAC.
- Output constant current level can be adjusted through output cable with 1-10V.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.



Applications

Security, pathway and perimeter lighting, Building entryways and walkways..





LED Slim Adjustable Wallpack Light

Specifications

Model No.	LS-WP27WV3XXKYYYYY	LS-WP40WV3XXKYYYYY
Input Power	27W	27W
Lumen	3510 LM/W	5200 LM/W
Lumen Efficacy	130 LM/W	130 LM/W
Color Temperature	4000K, 4500K, 5000K, 5700K	
CRI	>70	
Viewing Angle	150*85 Degree (Type III)	
Input Voltage	120-277VAC 50/60Hz	
PF	≥0.9	
THD	≤20%	
Driver Brand	China brand driver	
Driver Model	MSPI-NIS25W20S-430	MSPI-NIS50W21S-640
Optional Accessory	Photocell	
LED Brand	Lumileds	
LED Type	3030	

Housing	Aluminum Alloy
Housing Color	Black / Dark Bronze/ white
Waterproof Rating	WET (IP65)
Operating Temperature	-40℃ TO 45℃
Operating Humidity	20%-90% RH
Storage Temperature	-40℃ TO 80℃
Storage Humidity	10%-95% RH
Warranty Time	5 Years

Photometrics

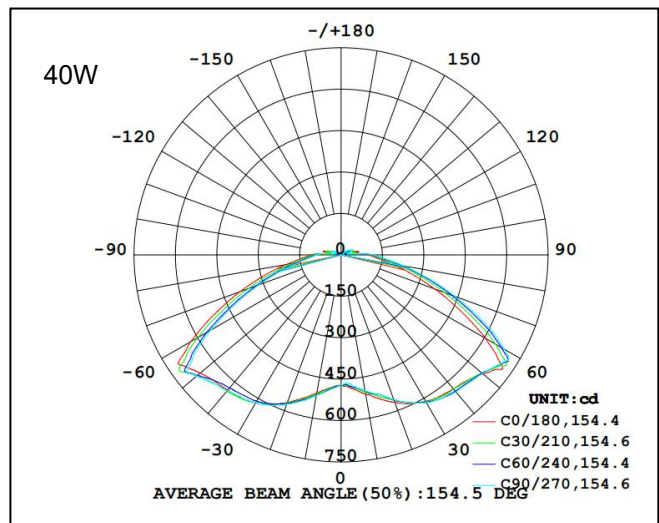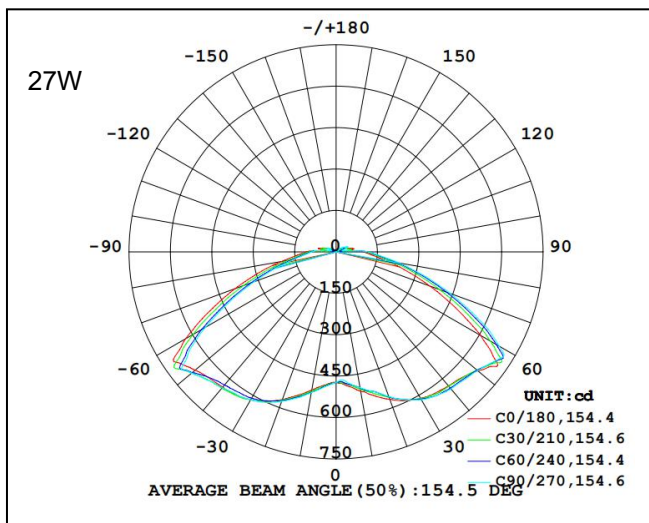

LED Slim Adjustable Wallpack Light

Projected LED Lumen Maintenance




Operating hours	0	25000	50000
Lumen maintenance factor	1	0.91	0.8

Data references the extrapolated performance projections for the WALLPACK LED platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

Structure



Dimensions

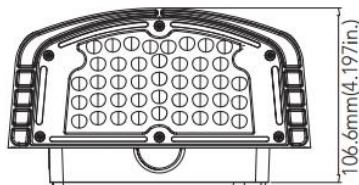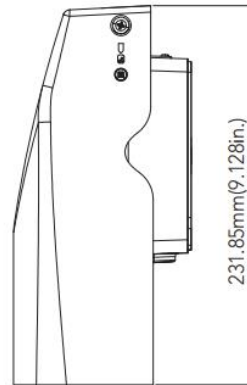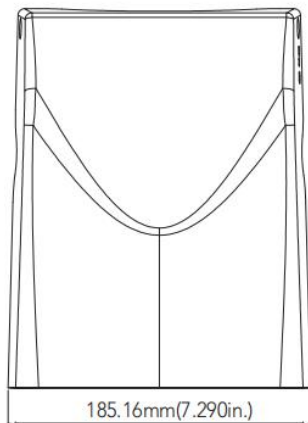

Net Weight:
27W: 1.52kg(3.351lb)
40W: 1.80kg(3.968lb)