



- UL/cUL, DLC, RoHS, FCC
- LED T8 retrofit
- High efficacy
- High light output
- Color rendering ≥ 80
- 5-year guarantee
- 50 000 hour system lifetime
- Reduces CO₂ emissions and maintenance costs

Ideal for:



- Industrial facilities / warehouse
- Offices
- Commercial lighting
- Public lighting
- Residential lighting
- Schools
- Parking
- Airports
- Hospitals
- Retail
- Convention centers

a highly efficient LED T8 retrofit light source that delivers excellent energy efficiency, high quality of light, and has a rated system lifetime of 50 000 hours. It is intended to be used as a quick solution to save energy in existing luminaires. replaces T8 fluorescent tubes operated by rapid start, instant start, warm start electronic ballasts as well as inductive ballasts. With minimal effort, it is possible to safely upgrade installations to LED technology. offers instant energy saving without compromising on uniform and bright luminance comparable to tri-phosphor fluorescent lamps.

Product Overview

PROGRAM	ARTICLE NO.	TYPE	TYPICAL LUMINOUS FLUX*	EFFICACY (lm/W)	LENGTH WITHOUT PINS (mm)	UNITS/PACK (pcs)	
	2FT 10W						
	9811000	QuickFit US, 10W/2FT, 30K, clear	1350	135	600/2FT	30	
	9811001	QuickFit US, 10W/2FT, 30K, frosted	1350	135	600/2FT	30	
	9811002	QuickFit US, 10W/2FT, 35K, clear	1350	135	600/2FT	30	
	9811003	QuickFit US, 10W/2FT, 35K, frosted	1350	135	600/2FT	30	
	9811004	QuickFit US, 10W/2FT, 40K, clear	1450	145	600/2FT	30	
	9811005	QuickFit US, 10W/2FT, 40K, frosted	1450	145	600/2FT	30	
	9811006	QuickFit US, 10W/2FT, 45K, clear	1450	145	600/2FT	30	
	9811007	QuickFit US, 10W/2FT, 45K, frosted	1450	145	600/2FT	30	
9811008	QuickFit US, 10W/2FT, 50K, clear	1450	145	600/2FT	30		
9811009	QuickFit US, 10W/2FT, 50K, frosted	1450	145	600/2FT	30		
9811010	QuickFit US, 10W/2FT, 55K, clear	1450	145	600/2FT	30		
9811011	QuickFit US, 10W/2FT, 55K, frosted	1450	145	600/2FT	30		
9811012	QuickFit US, 10W/2FT, 60K, clear	1550	155	600/2FT	30		
9811013	QuickFit US, 10W/2FT, 60K, frosted	1550	155	600/2FT	30		
9811014	QuickFit US, 10W/2FT, 65K, clear	1550	155	600/2FT	30		
9811015	QuickFit US, 10W/2FT, 65K, frosted	1550	155	600/2FT	30		
2FT 15W							
9811016	QuickFit US, 15W/2FT, 30K, clear	1700	113	600/2FT	30		
9811017	QuickFit US, 15W/2FT, 30K, frosted	1700	113	600/2FT	30		
9811018	QuickFit US, 15W/2FT, 35K, clear	1700	113	600/2FT	30		
9811019	QuickFit US, 15W/2FT, 35K, frosted	1700	113	600/2FT	30		
9811020	QuickFit US, 15W/2FT, 40K, clear	1785	119	600/2FT	30		
9811021	QuickFit US, 15W/2FT, 40K, frosted	1785	119	600/2FT	30		
9811022	QuickFit US, 15W/2FT, 45K, clear	1785	119	600/2FT	30		
9811023	QuickFit US, 15W/2FT, 45K, frosted	1785	119	600/2FT	30		
9811024	QuickFit US, 15W/2FT, 50K, clear	1825	122	600/2FT	30		
9811025	QuickFit US, 15W/2FT, 50K, frosted	1825	122	600/2FT	30		
9811026	QuickFit US, 15W/2FT, 55K, clear	1825	122	600/2FT	30		
9811027	QuickFit US, 15W/2FT, 55K, frosted	1825	122	600/2FT	30		
9811028	QuickFit US, 15W/2FT, 60K, clear	1825	122	600/2FT	30		
9811029	QuickFit US, 15W/2FT, 60K, frosted	1825	122	600/2FT	30		
9811030	QuickFit US, 15W/2FT, 65K, clear	1825	122	600/2FT	30		
9811031	QuickFit US, 15W/2FT, 65K, frosted	1825	122	600/2FT	30		
9811032	QuickFit US, 15W/3FT, 30K, clear	1800	120	900/3FT	30		
9811033	QuickFit US, 15W/3FT, 30K, frosted	1800	120	900/3FT	30		
9811034	QuickFit US, 15W/3FT, 35K, clear	1800	120	900/3FT	30		
9811035	QuickFit US, 15W/3FT, 35K, frosted	1800	120	900/3FT	30		
9811036	QuickFit US, 15W/3FT, 40K, clear	1800	120	900/3FT	30		
9811037	QuickFit US, 15W/3FT, 40K, frosted	1800	120	900/3FT	30		
9811038	QuickFit US, 15W/3FT, 45K, clear	1800	120	900/3FT	30		
9811039	QuickFit US, 15W/3FT, 45K, frosted	1800	120	900/3FT	30		
9811040	QuickFit US, 15W/3FT, 50K, clear	1800	120	900/3FT	30		
9811041	QuickFit US, 15W/3FT, 50K, frosted	1800	120	900/3FT	30		
9811042	QuickFit US, 15W/3FT, 55K, clear	1800	120	900/3FT	30		
9811043	QuickFit US, 15W/3FT, 55K, frosted	1800	120	900/3FT	30		
9811044	QuickFit US, 15W/3FT, 60K, clear	1800	120	900/3FT	30		
9811045	QuickFit US, 15W/3FT, 60K, frosted	1800	120	900/3FT	30		
9811046	QuickFit US, 15W/3FT, 65K, clear	1800	120	900/3FT	30		
9811047	QuickFit US, 15W/3FT, 65K, frosted	1800	120	900/3FT	30		

Optoelectronics Data

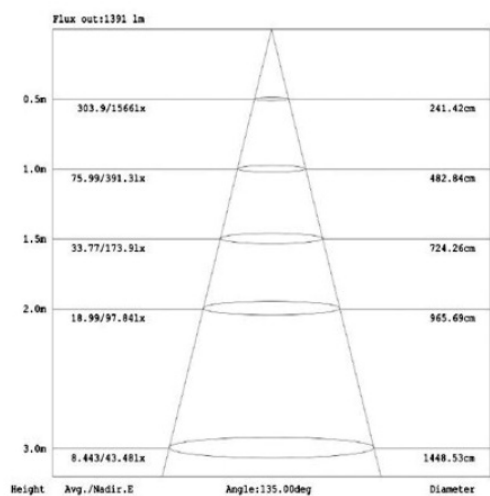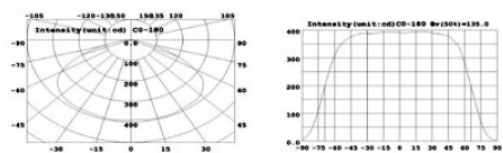

Input	AC 100-120 VAC AC 100-347V 50/60 Hz
Color rendering index	≥ 80 / ≥90
Beam angle	120°
Ambient temperature	-25°C - +50°C
Operating humidity	20 - 70%
Pf	> 0.95
Cap base	G13
Controllability	Non-dimmable Dimmable (10-95%)
Warm-up time to 60% light output	Instant full light
Suitable for accent lighting	No

