




Illumination

- Ultra bright, energy efficient, long life Red or Green LED.
- Single and double-sided option included

Electrical

- Dual 120V-277V.
- Charge rate/power"ON"LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V 1000mAh Long life, maintenance-free, rechargeable Ni-MH battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Certifications and Compatibilities

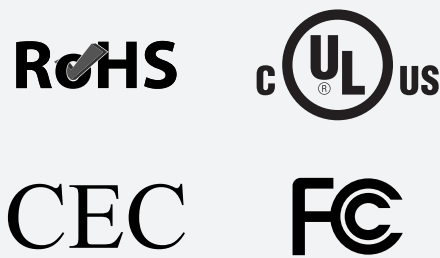

Project Details		Type
Project:		
Product:		
Prepared by:		
Notes:		

Mounting



- EZ-snap mounting canopy included for top or end mount.
- Universal J-Box mounting pattern.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- UL 94v-0 flame rating.
- EZ snap-out chevron directional indicators.
- Compact, low-profile design.

Warranty/Listing

- Five year warranty on all electronics and housing. Batteries 3 years.
- UL listed for damp locations (0° -40°C)

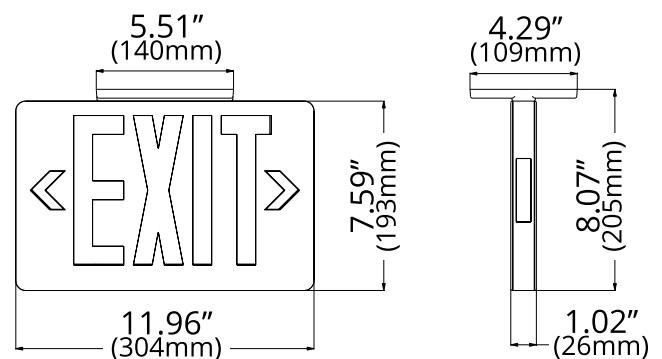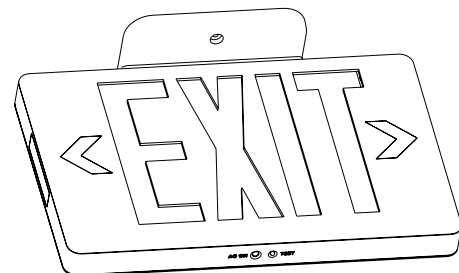

Order Format

Example: EES01-G1-WH

Series	Letter Color	Letter Type	Voltage	Finish Color
EES01	G=Green R=Red*	1=Exit	Blank=120-277V	WH=White BL=Black**

* Red letter color comes as standard, please contact sales for lead time on green color option
 ** White finish comes standard, please contact sales for lead time on black finish