CEU Low Profile All LED Exit & Emergency Combo

LIGHT	ING WHOLESALE INC.

Project:	
Type:	
Catalog #:	



STANDARD









ILLUMINATION

- · Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity option available.

MOUNTING

- EZ-snap thermoplastic mounting canopy included provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

 Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.


OPTIONS

SPV: UL Listed for special voltage option.

WARRANTY / LISTING

- One year warranty on all electronics and housing.
- UL Listed for damp locations (0°C 30°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

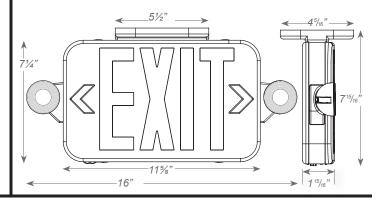

ORDERING INFORMATION

Sample	Part	Number:	CFU-3	-R-W
Carripic	, uit	I VUITIDOI.	<u> </u>	

MODEL	FACE			R COLOR	HOUSING COLOR		OPTIONS			
CEU	3 Universal Single/Double		R	Red	W	White	RC	Remote Capacity		
			G	Green	В	Black	SPV	120/230 Volt 50/60Hz		

CEU Low Profile All LED Exit & Emergency Combo

Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INP	UT WATTS	(W)	INPUT AMPS (A)			
	120V	230V	277V	120V	230V	277V	
CEU RED	1.1	1.2	1.3	0.08	0.09	0.09	
CEU RED RC	1.6	1.6	1.6	0.12	0.11	0.11	
CEU GREEN	1.1	1.2	1.3	0.08	0.09	0.09	
CEU GREEN RC		1.6	1.6	0.12	0.11	0.11	

REMOTE LAMP COMPATIBILITY

İ	MODEL NUMBER	BATTERY	REMOTE													
			CAPACITY	RHLED			RH16LED	RI	116	RH		RHR		SRH		SRHLED
				3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V	
ĺ	CEU-RC	3.6V	1W	Χ		Χ										