LEDone®

| Date: | Location: |
|-----------|-------------|
| Product: | Project: |
| Quantity: | _Catalog #: |

LED 40W Canopy Light

FEATURES

- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

Special Order:

- 4,000K
- Clear Lens

CONSTRUCTION:

Heavy die-cast aluminum housing with polyester powder-coated finish

OPTICAL SYSTEM:

Seoul 2835 LED chips. Frosted lens. 120° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Wall Mounting with quick mount back plate for easy installation.

CONTROLS & DIMMING:

0-10V dimming comes standard.


| MODEL NUMBER – 5,000K | WATTAGE | LUMENS | EFFICACY | CRI | POWER FACTOR | THD | REPLACES |
|-----------------------|---------|---------|----------|-----|-----------------|-----|-----------------|
| CP01A-40 | 40W | 4,640LM | 116LM/W | 80 | 0.92 | 20% | 100W – 150W HID |

LED 40W Canopy Light


LEDone®

| Series | Wattage | Color Temperature | Voltage |
|--------|---------|-------------------|---------------|
| СР | 40W | 5000K | LV = 120-277V |
| | | | |
| | | | |
| | | | |

MEASUREMENTS

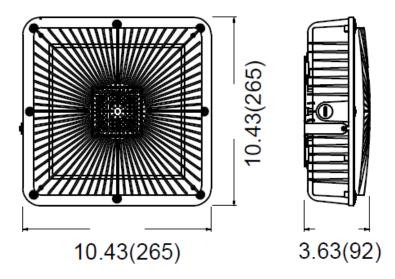

| MODEL | QUANTITY | WEIGHT |
|----------|----------|----------|
| CP01A-40 | 1 | 6.17 lbs |

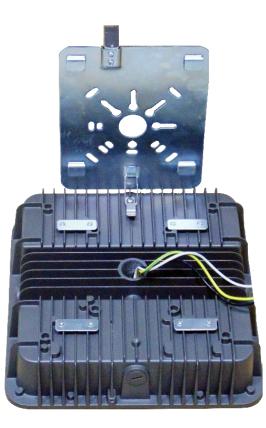

Phone: (844) LEDONE6 | Fax: 1-510-217-9461 | Web: www.ledonecorp.com