



Energetic Lighting's™ LED Strip Light family of fixtures are designed to emulate the look of traditional fluorescent T8 tube lights. This series offers variations from 10W up to 40W outputs, and single and double strip appearances. 0-10V dimming and 120-277VAC operation are featured. Designed for series installation, the easy end connection design facilitates any install. Combining a durable stels housing, rugged polymer diffuser, and an L70 lifetime of 50,000 hours will provide many years of dependable and worry free use.

## Features

- 0-10v dimmable
- No UV or IR radiation
- Minimalistic and efficient design
- Mercury-free construction
- Suitable for Damp Location use
- Toolless wire compartment entry
- Linkable ends with included adapter


## Applications

- Architectural decor
- Overhead task lighting
- Limited space mounting locations
- General lighting


## Specification

Order Number	30034	30032	30030	30029
Model Number	E3SLA10D2-840	E3SLA20D4-840	E3SLA40D4-835	E3SLA40D4-840
Configuration	Single Strip	Single	Double Strip	Double
Beam Angle	120°	130°	130°	130°
Lumen Output	1086 LM	2174 LM	4254 LM	4305 LM
Luminous Efficacy	106 LM/W	110 LM/W	111 LM/W	110 LM/W
Input Power	11 W	20 W	39 W	39 W
Input Voltage	120-277 Vac	120-277 Vac	120-277 Vac	120-277 Vac
Power Factor	0.9	0.9	0.9	0.9
THD	0.15	0.15	0.15	0.15
Color Temp (CCT)	4000 K	4000 K	3500 K	4000 K
Color Rend (CRI)	80	80	80	80
Lifetime Rating	50000 hours	50000 hours	50000 hours	50000 hours
Warranty	5 Years	5 Years	5 Years	5 Years
Dimmability	0-10v	0-10v	0-10v	0-10v
Operating Temp	-4 to 122 (°F)	-4 to 122 (°F)	-4 to 122 (°F)	-4 to 122 (°F)
Environment	Damp Location	Damp Location	Damp Location	Damp Location
DLC	DLC Standard	DLC Standard	DLC Standard	DLC Standard
Safety Cert	UL	UL	UL	UL
Weight	3 LBS	3 LBS	5.2 LBS	5.2 LBS
Dimensions	24.2"x1.8"x2.2"	48.2"x1.8"x2.2"	48.2"x3.5"x2.2"	48.2"x3.5"x2.2"

## Photometric Data

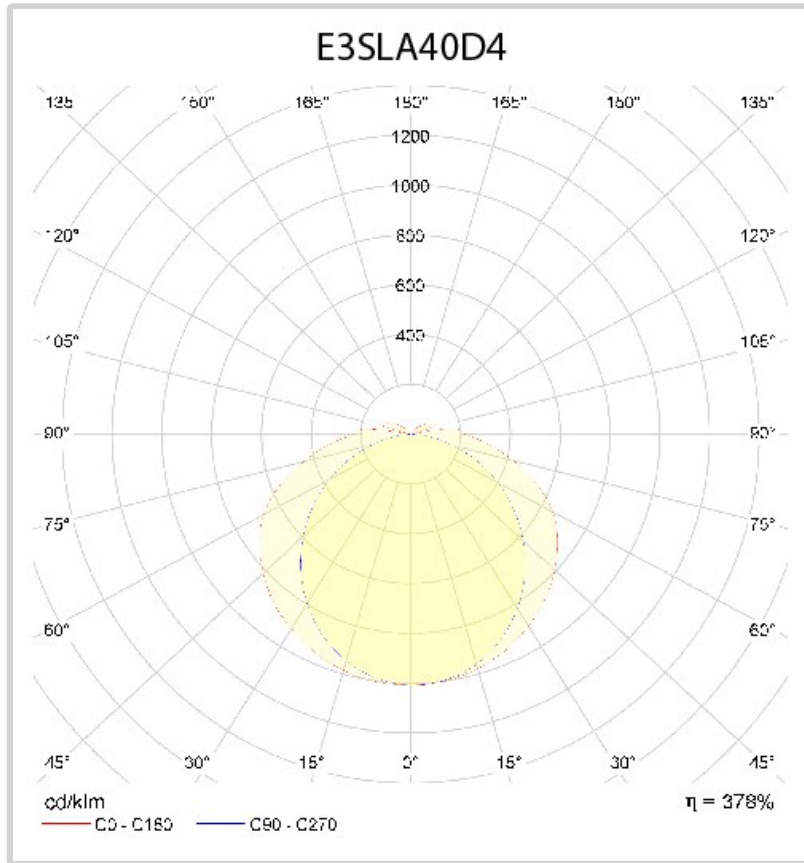

## Supplementals Information

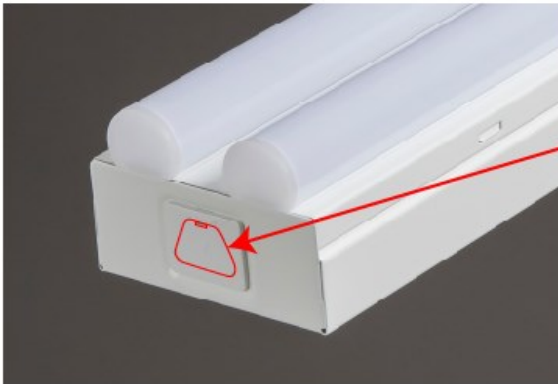

**CAUTION:** The E3SLA series fixtures are provided with connectors at either end for linking adjacent fixtures, and are shipped with safety covers to prevent inadvertent contact with the power pins underneath. If installation does not involve linking multiple fixtures together, please DO NOT remove the safety covers.

If safety covers are to be removed for linking, ensure that power is shut off to the fixture circuit during installation, so that power pins are not energized during installation.

## Dimensions and Packaging Info

Model Number	E3SLA10D2-840	E3SLA20D4-840	E3SLA40D4-835	E3SLA40D4-840
Item UPC		8 4594000761 6		8 4594000715 9
Case UPC		10 8 4594000761 3		10 8 4594000715 6
Master Carton UPC				
Item(s) per pack				1 fixture per package
packs per case				6 packs per case
Case per Master				
Item weight				6 lbs
Case weight				39 lbs
Master Weight				
Item pack dimensions				49.8 (L) x 4.5(W) x 3.19 (H)
Case dimensions				51 (L) x 11 (W) x 11 (H)
Master dimensions				