




6CCT & 5Wattage Selectable T8 tube

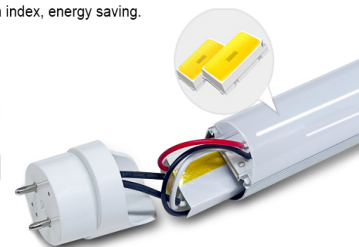

High-quality high-brightness LED lamp beads.  
No stroboscopic, high index, energy saving.




**Product Features**

- **Installation:** Type AB, Plug & Play Compatible Electronic Ballast & ballast bypass, Direct wire, Single-End or Double-End Input.
- **ALL IN ONE: 5 Power & 6 CCT Adjustable**
- **Construction:** Aluminum case and PC lens, Standard colors are Clear and Frosted.
- **LED System:** LED system with a life rating of  $\geq 50,000$  hours at L70 @25°C. Luminous efficacy  $> 130$  lm/W.
- **Electrical:** 100V-277/347 VAC. PF $\geq 0.9$  and THD $\leq 20\%$ .
- **Certification:** ETL Listed, DLC SSL 5.1, FCC, RoHS.
- **Warranty:** Limited 5-Year Warranty.

**Dimension**

Item	L×W×H (inch)
4FT	48" x 1.12" x 1.28"

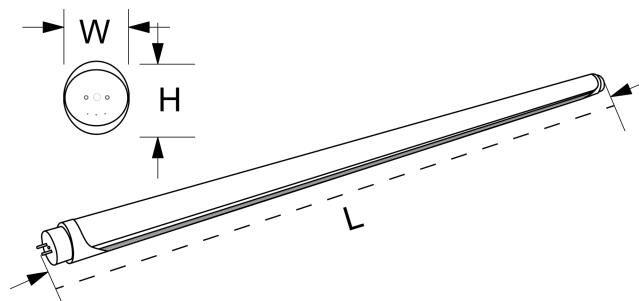

**Order Information**

Part No.	Length	Power	Luminous Efficacy	Luminous Flux	Certificate
EDI-T84F24-AB-XXK G1	4ft	10W-12W-15W-18W-22W 5 Powers Adjustable	130 lm/W	3120 lm	ETL DLC 5.1

## Specifications

Model Number		EDI-T84F24-AB-XXK G1
	Length	4ft
	Voltage	100-277V / 100-347V
	Wattage	10W-12W-15W-18W-22W 5 Powers Adjustable
	CCT	2700K-3500K-4000K-5000K-5700K-6500K 6 CCT Adjustable
	Efficacy	130 lm/W
	Luminous	3120 lm
	Base	G13
Certifications	Safety / DLC	ETL DLC Stander 5.1
Photo metric	CCT	
	SDCM	≤6
	Beam Angle	120°
	Ra	>80
	R9	>0
Electrical	Wattage	Max 24W
	Current	Max 0.24A
	Rated Voltage	100-277V / 100-347V
	Frequency	50/60Hz
	THD	≤ 20%
	Surge Protection	2KV
	Power Factor	≥ 0.9
Lifetime	L70	≥ 50000
	L90	≥ 36000
	Warranty	5 Years
Construction	Housing	Aluminum
	Optical-Lens	PC Frosted / Clear
Operation	Start Time	≤ 1S
	Operating Temp	-4°F - 104°F
	Storage Temp	-22°F - 140°F
	Optical-Lens	PC Frosted /Clear
	Environment	Indoor
	Ingress Protection	IP22 Rating

## Packing / weight

Size	Outer box (L*W*H)	Qty/Ctn (pcs)	G.W/Ctn (lbs)	Container 20GP(28 m <sup>3</sup> )	Container 40HQ(68 m <sup>3</sup> )	Container 45HQ(78 m <sup>3</sup> )
4ft	48.6*7.28*7.28 in 1235*185*185 mm	25	16.0	13000 pcs	39600 pcs	45000 pcs

## Warranty

This product has a warranty of period of 5 years from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering or removal of the Q.C. and/or date label, usage in improper working environment or installation not according to the current edition of the National Electric Code. Should this product fail during the warranty period it will be replaced free of charge, subject to correct installation and return of the faulty unit. Manufacturer does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. Manufacturer reserves the right to alter specifications without prior notice.

## Note

- 1.The installation and maintenance must be completed by electricians or professionals.
- 2.Please cut off the power before installation and maintenance.
- 3.The thermally insulating material is not allowed to cover the fixture.
- 4.Please keep away from the corrosive substance, and keep the fixture dry and clean.
- 5.Working temperature: -4°F~104°F, storage temperature: -22°F~140°F.