




DIMENSIONS:

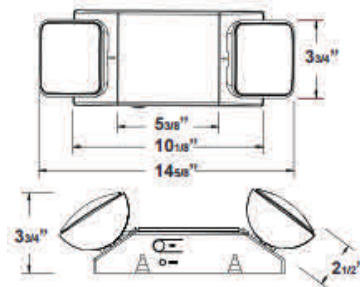

EL-1
EL-1-B

LED Emergency Lights

High impact thermoplastic emergency light . Two fully adjustable 5.4-watt, glare-free lamp heads for safe egress

ELECTRICAL SPECIFICATIONS:

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 3.6V long-life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections
- Suitable for wall or ceiling mount
- Top and side knockout for conduit applications

Standard

Optional



LIGHTING SPECIFICATIONS:

- Long lasting, efficient ultra-bright white LED lamp heads
- 1 watt (8 LEDs x 0.125 watt) per head
- High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution
- Adjustable LED lamp heads provide optimal center-to-center spacing. High-lumen option available for increased center-to-center spacing

HOUSING SPECIFICATIONS:

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- UL listed for damp locations (0°C – 50°C)

WARRANTY:

- Five-year warranty on all electronics and housing
- Batteries pro-rated for two years

CERTIFICATIONS:

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes



JOB NAME: _____

DATE: _____

TYPE: _____

EL-1

EL-1-B

LED Emergency Lights

ORDER INFORMATION:

MODEL	HOUSING	HEADS	VOLTAGE	BATTERY	NOTES
EL-1	White	(2) 1-watt	120/277	Ni-Cad	Universal mount: wall & ceiling
EL-1-B	Black	(2) 1-watt	120/277	Ni-Cad	Universal mount: wall & ceiling

OPTIONS:

- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes
- HL: 12-LED heads (12 LEDs x 0.125 watt) per head provide increased center-to-center spacing
- SPV: 208/220/240 multi-tap voltage in 50/60Hz.

ELECTRICAL INFORMATION:

MODEL NO	INPUT WATTS (W)	INPUT WATTS (W)	INPUT WATTS (W)	INPUT WATTS (W)	INPUT WATTS (W)	INPUT AMPS (A)	INPUT AMPS (A)	INPUT AMPS (A)	INPUT AMPS (A)	INPUT AMPS (A)
	120V	277V	208V	220V	240V	120V	277V	208V	220V	240V
EL-1	1.8	1.8	2.6	3.5	3.1	0.022	0.010	0.024	0.029	0.025
EL-1-B	1.6	1.6				0.020	0.010			

