




DIMENSIONS:

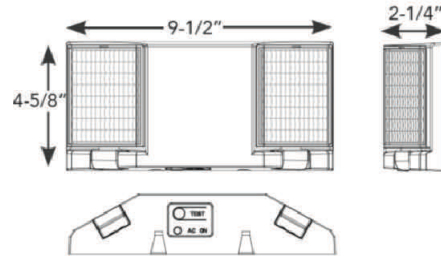

EL-2
EL-2-B

Remote Capable LED Emergency Lights

High impact thermoplastic emergency light . Two fully adjustable 5.4-watt, glare-free lamp heads for safe egress

Standard



ELECTRICAL SPECIFICATIONS:

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 3.6V long-life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections
- Suitable for wall or ceiling mount
- Top and side knockout for conduit applications

LIGHTING SPECIFICATIONS:

- Long lasting, efficient ultra-bright white LED lamp heads
- 1 watt (8 LEDs x 0.125 watt) per head
- High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution
- Two adjustable LED lamp heads provide optimal center-to-center spacing

HOUSING SPECIFICATIONS:

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- UL listed for damp locations (0°C – 50°C)

WARRANTY:

- Five-year warranty on all electronics and housing. Battery pro rated for five years.

CERTIFICATIONS:

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes



JOB NAME: _____

DATE: _____

TYPE: _____

EL-2 EL-2-B

Remote Capable LED Emergency Lights

ORDER INFORMATION:

MODEL	HOUSING	HEADS	VOLTAGE	BATTERY	NOTES
EL-2	White	(2) 1-watt	120/277	Ni-Cad	Universal mount: wall & ceiling
EL-2-B	Black	(2) 1-watt	120/277	Ni-Cad	Universal mount: wall & ceiling

OPTIONS

- SPV: UL Listed for special voltage option

ELECTRICAL INFORMATION:

MODEL NO	INPUT WATTS (W)	INPUT WATTS (W)	INPUT AMPS (A)	INPUT AMPS (A)
	120V	277V	120V	277V
EL-2	4.1	4.6	0.037	0.018
EL-2-B	5.2	5.2	0.06	0.03

