

Durable Lighting Made for Industrial Safety



Hazardous Location LED Luminaire G Series



Specsheet-2025-01 EN



Flat glass is standard.



Flat glass with flat wire guard is optional.



Spherical glass is optional. The wire guard is generally configured with a spherical glass. If wire guard is not needed, customer can make a note when placing an order.



Product Description

The G Series LED luminaire is the ideal choice for marine and hazardous applications. They can be used in locations where moisture, dirt, dust, corrosion and vibration may be present, or areas where wind, water, snow or high ambient can be expected.

Features

- 0-10V dimming
- Compact and robust structure, excellent reliability
- Various installation ways for different applications
- Great impact resistance with IK08/IK10 certified
- Copper-free aluminum housing, great corrosion resistance and cooling performance

Compliance

UL 844 Hazardous Locations
Class I Division 1, Group C, D
Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group F, G
Class III
Class I, Zone 1, Group IIB
Class II, Zone 21, Group IIIC
UL 1598 Wet Locations
ETL (ATM for Report 105342415DAL-001/003)
ABS
IP66
IK10



Application

- Power Plants
- Heavy Industrials Storage Facility
- Paper mills
- Wastewater Treatment Plants
- Loading Docks Platforms
- Offshore Environments
- Chemical Processing Facility
- Petrochemical Processing Facility
- Metallurgical Industry
- Coal Mine
- Food and Alcohol industry

Warranty

5-Year Standard Warranty

Technical Parameter

• Electrical

Specification	EX-10W GYZDA	EX-20W GYZDA	EX-30W GYZDA	EX-40W GYZDA
Rated Power	10W	20W	30W	40W
Input Voltage	100-277VAC			
Input Frequency	50/60Hz			
Power Factor	> 0.95			

• Optical

Specification	EX-10W GYZDA	EX-20W GYZDA	EX-30W GYZDA	EX-40W GYZDA
Lumen Output	1140lm	2280lm	3300lm	4400lm
Lumens Per Watt	114lm/W	114lm/W	110lm/W	110lm/W
CCT	2700K-7000K			
CRI	> 70			
Beam Angle	40°/60°/90°/120°			
Dimming	0-10V dimming			

• Environmental



Specification	EX-10W GYZDA	EX-20W GYZDA	EX-30W GYZDA	EX-40W GYZDA
Ambient Temperature	-40°C to 65°C (-40°F to 149°F), T4; -40°C to 40°C (-40°F to 104°F)			

• Mechanical


Specification	EX-10W GYZDA	EX-20W GYZDA	EX-30W GYZDA	EX-40W GYZDA
Housing Material	Copper-free aluminum			
Diffuser	Tempered glass			
Hardware	Stainless steel			
Protection	IP66/IK10			
Mounting	Ceiling, Pole, Pendant, Wall			
Cable Entry	Top outlet: 3/4 NPT (standard), M25 (optional) <i>Notice: The standard product only has a top outlet. If customer needs to make a side outlet, it can also be done. The side outlet is 1/2 NPT or M25. For more information, please consult your sales representative.</i>			

Product Dimensions


with spherical glass and wire guard

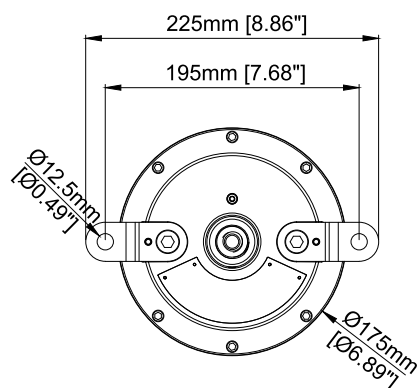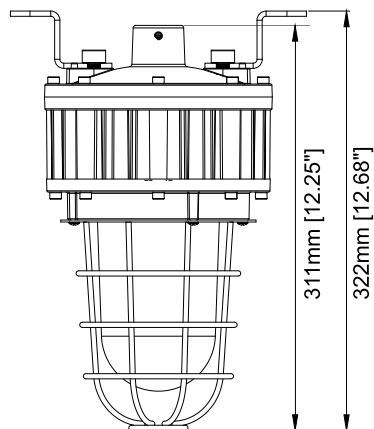

with lamp shade

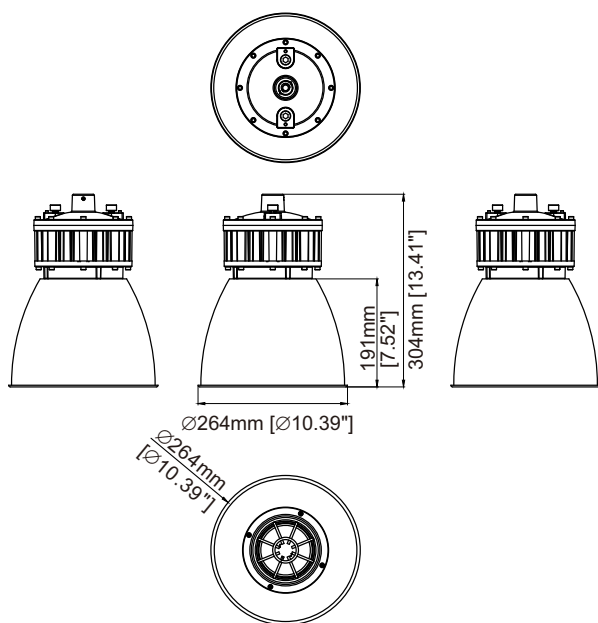


with cut-off lamp shade

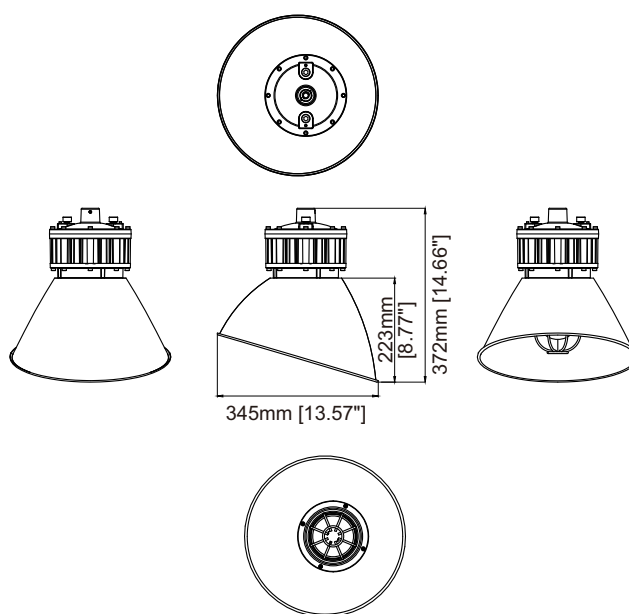

• Packing Information

Model	Net Weight	Gross Weight	Quantity/Carton	Package Dimensions (LxWxH)
G (with flat glass)	4.86 kg/10.71 lb	5.2kg/11.46 lb	1 pc	380x270x270mm/ 14.96x10.63x10.63inch
G (with spherical glass and wire guard)	5.36 kg/11.82 lb	6.3 kg/13.89 lb	1 pc	380x270x270mm/ 14.96x10.63x10.63inch
G (with 25° pole stanchion)	6.5 kg/ 14.33 lb	8 kg/ 17.64 lb	1 pc	510x560x260mm/ 20.08x22.05x10.24inch

Photometric

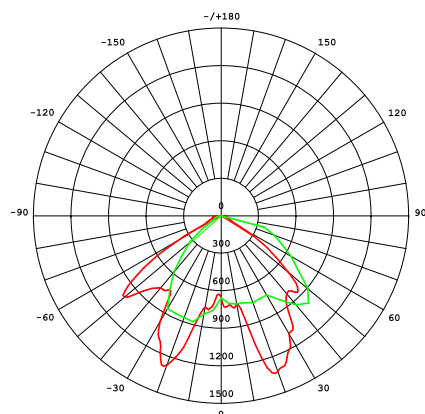

120 Degree

UNIT:cd

- V 0.0DEG PLAN, 118.7

- H 0.0DEG PLAN, 123.5

AVERAGE BEAM ANGLE(50%):121.1 DEG

Ordering Guide


EX -
 yyyW
X
Y
Z
D
A
-1

1 2 3 4 5 6 7 8




1. Product Categories	2. Wattage	3. Shell Shape Series	4. Dimming or Not
Explosion Proof Light	10/20/30/40W	"X" Can be G	"Y" Can be: D: Dimmable N: Non-dimmable
5. Color Temperature	6. Beam Angle	7. Spherical Glass Cover Optional	8. Optional
"Z" can be 27 to 70 denotes 2700K to 7000K, and each 100K gradually increase, max 7000K	D40=40° D60=60° D90=90° D120=120°	"A" = C: spherical glass	"-1" NA (optional)

Mounting Methods and Accessories

• Option 1: Ceiling Mounting



• Option 2: Wall Mounting

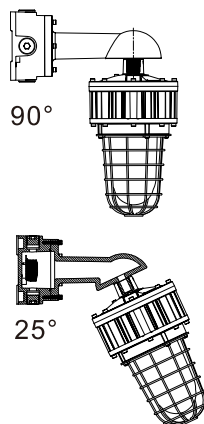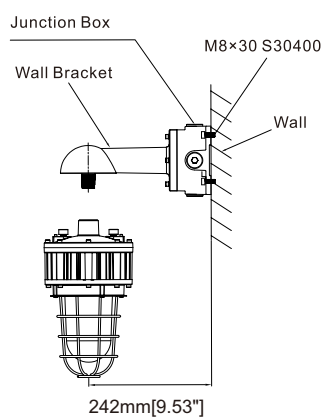

• Accessories





Stanchion Arm
EX-HD51-KYD 90



Stanchion Arm
EX-HD51-KYD 25

• Option 3: Pendant Mounting (Vertical)

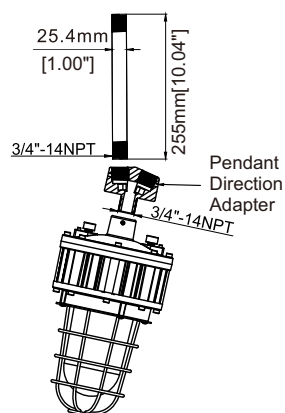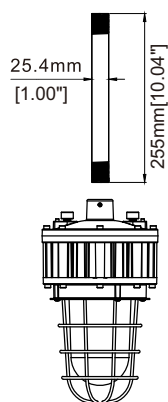

• Accessories




Pole
Ex-Straight Pipe



Pendant Direction Adapter
Ex-D01

Mounting Methods and Accessories

- Option 4: Pendant Mounting (Non-vertical)

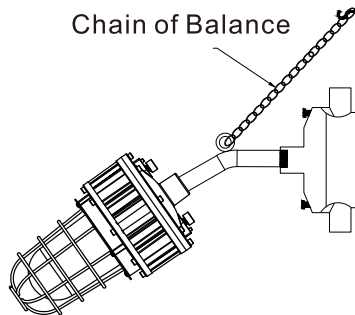

- Accessories



Junction Box
EX-HD51-KB1



Pole
Ex-Bended Pipe



Pendant Chain
Ex-Straight Chain

- Other Optional Accessories



Lamp Shade



Cut-off Lamp Shade