

EZXTEU-RC Remote Capable LED Exit Sign

| | |
|------------|--|
| Project: | |
| Type: | |
| Catalog #: | |

STANDARD



OPTIONAL



ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Offers 11W of remote capacity.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable Sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board/remote lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.
- HTR: Optional internal heater for cold temperature applications.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (20°C – 50°C / 68°F – 122°F)

DIMENSIONS

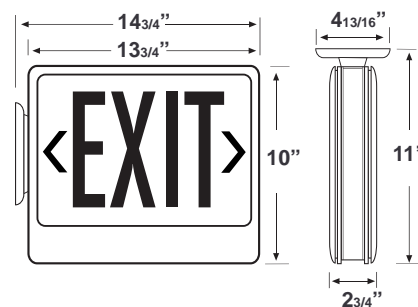

ORDERING INFORMATION

Sample Part Number: **EZXTEU-1-R-W-EM-RC**

Special voltage and SALIDA face plate options available. Check with your Best Lighting Representative.

| Model | No. of faces | Letter | Housing | Battery | | Options |
|--------|--------------------------------|---------|---------|-------------------|-----------------------------|---|
| EZXTEU | 1 Single Face | R Red | W White | EM Battery Backup | RC Remote Capacity Standard | HTR Internal Heater SDT Self-diagnostics |
| | 2 Universal Single/Double Face | G Green | B Black | | | |

EZXTEU-RC Remote Capable LED Exit Sign

| | |
|-------------------|--|
| Project: | |
| Type: | |
| Catalog #: | |

ELECTRICAL INFORMATION

| Catalog Number | Input Watts (W) | | Input Amps (A) | |
|------------------|-----------------|------|----------------|------|
| | 120V | 277V | 120V | 277V |
| EZXTEU-RC/RC-SDT | 10 | 10 | 0.10 | 0.05 |

REMOTE LAMP COMPATIBILITY

| | Maximum Wattage Allowed |
|-----------|-------------------------|
| EZXTEU-RC | 11 |

| Remote Head Family | Total Wattage |
|--------------------|---------------|
| RH1-6V5.4W | 5.4 |
| RH1-6V7.2W | 7.2 |
| RH1-6V9W | 9 |
| RH2-6V5.4W | 10.8 |
| RHR-1-6V5.4W | 5.4 |
| RHR-1-6V7.2W | 7.2 |
| RHR-1-6V9W | 9 |
| RHR-2-6V5.4W | 10.8 |
| RH16-1-6V5W | 5 |
| RH16-2-6V5W | 10 |
| RH1-WP-6V5.4W | 5.4 |
| RH1-WP-6V7.2W | 7.2 |
| RH1-WP-6V9W | 9 |
| RH2-WP-6V5.4W | 10.8 |