



FL-SH1

FLD2-15W-50K-D-KN
FLD2-15W-30K-D-KN

LED BULLET FLOOD LIGHTS WITH KNUCKLE

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Great for use with motion sensors and other instant on/off controls.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 15W
- Power factor: >0.9
- Efficacy: 126LM/W

HOUSING SPECIFICATIONS:


- Die-cast aluminum with powder coat finish (Bronze)
- Cord type: 18" SJTW 18/3 AWG cable
- Operating temperature: -40°F ~ 104°F
- Maintenance free
- High light transmittance, anti-UV & fire resistant PC
- Westgate's powerful bullets
- Mounting: 1/2" NTP knuckle
- Lifespan: 70,000 Hrs.
- IP rating: IP65, Wet Locations

CERTIFICATIONS: UL, DLC



DIMENSIONS:

5-1/2"(H) x 3"(W) x 4-1/4"(D)

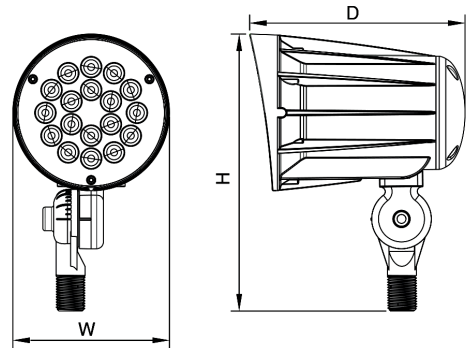

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
FLD2-15W-50K-D-KN	15W	120~277VAC	1900LM	5000K
FLD2-15W-30K-D-KN	15W	120~277VAC	1900LM	3000K

ACCESSORIES:

MODEL	DESCRIPTION
FL-SH1	Polycarbonate shroud (Bronze) fits for FLD2-15W

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V Dimmable
- LED: Philips LUMILEDS
- Total lumens: 1900LM
- Color temperature: 5000K/3000K
- Color rendering index: >80
- Beam angle: 35°

WARRANTY: 7 years

