

# GSX SERIES Outdoor Lighting

GSX-RECS-80-150W-50K  
POWER-ADJUSTABLE RECESSED GAS STATION CANOPY LIGHT

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_


Note: \_\_\_\_\_ Type: \_\_\_\_\_



Selection:



Ideal for airport, auto dealership, corporate and office, education, government, healthcare, industrial and warehouse, municipal, parking, gas station and convenience stores, recreation and public venues, restaurants and hospitality, retail and grocery.

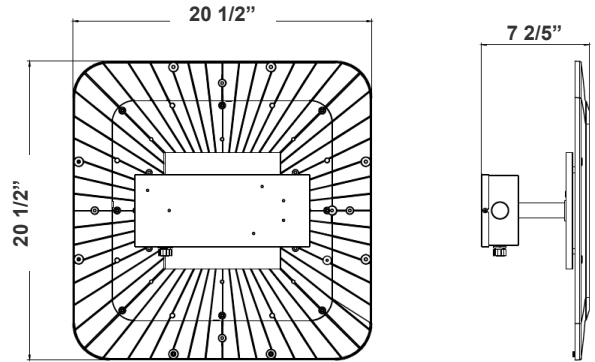

20 1/2" (W) x 20 1/2" (H) x 7 2/5" (D)

## Features

- ADC12 Aluminum Alloy, Outdoor Powder Coated
- Optical Lens: High Transmittance PC, Anti-UV & Fire Resistant
- 7-Year Warranty
- Multi-Power: Selectable Switch is on the side of the fixture

## Technical Specifications

### Electrical:

- Voltage: 120~277V AC, 50/60Hz
- Wattage: 80W/ 100W/ 120W/ 150W
- Power Factor: 0.95
- Efficacy: 140LM/W

### Mechanical:

- ADC12 Aluminum Alloy, Outdoor Powder Coated
- Mounting: Recessed Mounting
- Programmable Bi-Level Motion Sensor & Emergency Backup Options
- Operating Temperature: -40°F~104°F
- IP Rating: IP65, Suitable for wet locations

### Lighting:

- Dimmable: 0~10V Dimming
- LED: Philips Lumileds LEDs
- Optical Lens: High Transmittance PC, Anti-UV & Fire Resistant
- Multi-Power: Selectable Switch is on the side of the fixture
- Total Lumens: 21000LM Max.
- Color Temperature: 5000K
- Color Rendering index: >70
- Beam Angle: 100°X100°
- Lifespan: 70000 Hrs.

### Applications:

- Ideal for airport, auto dealership, corporate and office, education, government, healthcare, industrial and warehouse, municipal, parking, gas station and convenience stores, recreation and public venues, restaurants and hospitality, retail and grocery.

### Other Model:



- 150W | 21000LM | GSX-SRFC-80-150W-50K




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com | www.westgatecontrols.co



## Photometrics: GSX-RECS-80-150W-50K

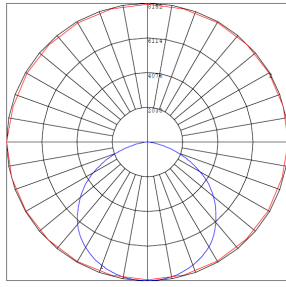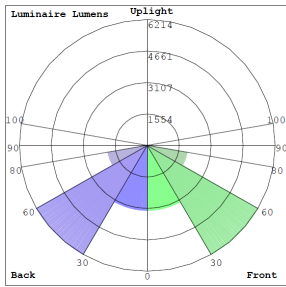

BUD Rating: B4-U2-G2

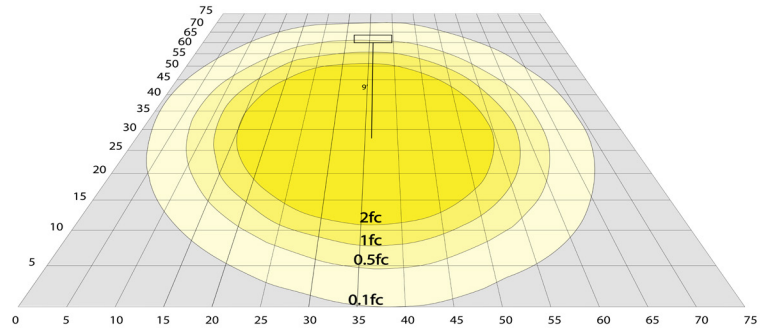


Area 75'x 75' Mounting Height: 9'

## Other Views:




Side View

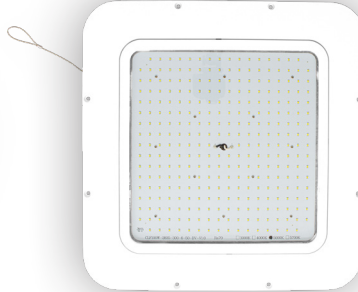

Front View



Back View

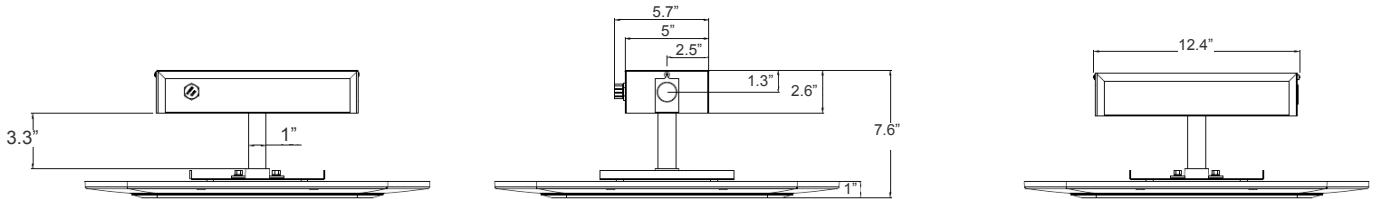

Pipe & Box Dimensions

## Performance Table: GSX-RECS-80-150W-50K

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
GSX-RECS-80-150W-50K	80W 100W 120W 150W	120-277V	11200LM 14000LM 16800LM 21000LM	5000K	B4-U2-G2	140

## Sample Ordering

Model Recessed Mount Min. Watt Max. Watt Color Temp.

GSX - RECS - 80 - 150W - 50K

## Factory-Installed Options

Blank = No Option  
OPT-EM-HB2EXT = Emergency Battery Backup Option, mounts on top of the fixture

## FACTORY-INSTALLED OPTIONS:



OPT-EM-HB2EXT

## Example:

1. GSX-RECS-80-150W-50K

(For GSX 150W 5000K MP fixture 120V-277V)

2. GSX-RECS-80-150W-50K  
OPT-EM-HB2EXT

(For GSX 150W 5000K MP fixture 120V-277V)  
(For Emergency Battery Backup Option, Mounts on Top of the Fixture)

