



LED LAMPS

ProLED[®] Performance Lamp Series



The ProLED Performance Lamp Series offers exceptional color consistency to enhance colors of objects and focal points. These lamps will transform a room by highlighting design details and creating a comfortable natural feel.



90+ CRI - Excellent Color Consistency

Dimmable to 10% for design flexibility

Rated for Enclosed Fixtures

UL Listed For Damp Locations

Title 20 - Tier 2 Compliant

Applications:

- Accent
- Display
- Education
- Healthcare
- Hospitality
- Office
- Retail

Markets:

- Commercial
- Residential
- Outdoor



Contact Your Customer Care Specialist For Pricing, Orders And Technical Support.

800.677.3334 www.halcolighting.com

ProLED®


Performance Lamp Series

Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____

Dimensions

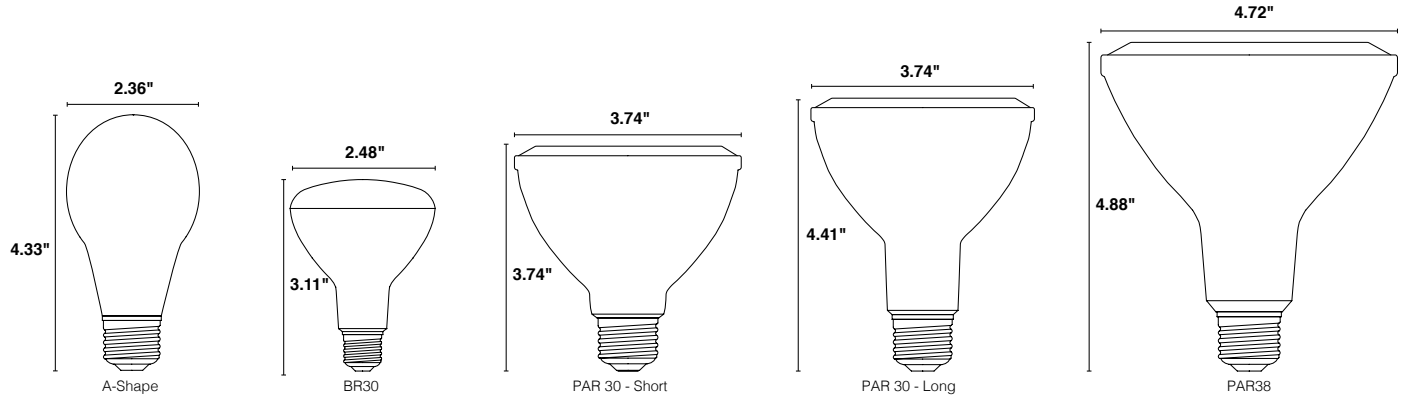

Ordering Information

Lamp Wattage	Base	Product #	Product Code	Color Temp.	CRI	Lumens	Useful Life*	Beam Spread	Pkg. Qty.	Volts	Equivalent Wattage	JA-8 Certified
A- Shape												
6	E26	84977	A19FR6/927/T20/LED	2700	>90	450	15,000	230°	1/60	120	40W	Yes
6	E26	84978	A19FR6/930/T20/LED	3000	>90	450	15,000	230°	1/60	120	40W	Yes
9	E26	84980	A19FR9/927/T20/LED	2700	>90	800	15,000	230°	1/60	120	60W	Yes
9	E26	84981	A19FR9/930/T20/LED	3000	>91	800	15,000	230°	1/60	120	60W	Yes
9	E26	84982	A19FR9/950/T20/LED	5000	>92	800	15,000	230°	1/60	120	60W	
12	E26	84983	A19FR12/927/T20/LED	2700	>90	1100	15,000	230°	1/60	120	75W	Yes
12	E26	84984	A19FR12/930/T20/LED	3000	>90	1100	15,000	230°	1/60	120	75W	Yes
Reflector Lamps												
8	E26	84985	BR30FL8/927/T20/LED	2700	90	720	25,000	120°	1/48	120	65W	
8	E26	84986	BR30FL8/930/T20/LED	3000	90	720	25,000	120°	1/48	120	65W	
PAR Lamps												
12	E26	84987	PAR30FL12S/927/T20/LED	2700	94	975	25,000	40°	1/48	120	75W	Yes
12	E26	84988	PAR30FL12S/930/T20/LED	3000	94	975	25,000	40°	1/48	120	75W	Yes
12	E26	84989	PAR30FL12S/940/T20/LED	4000	94	975	25,000	40°	1/48	120	75W	Yes
12	E26	84990	PAR30FL12S/950/T20/LED	5000	94	975	25,000	40°	1/48	120	75W	
12	E26	84991	PAR30FL12L/927/T20/LED	2700	94	975	25,000	40°	1/48	120	75W	Yes
12	E26	84992	PAR30FL12L/930/T20/LED	3000	94	975	25,000	40°	1/48	120	75W	Yes
12	E26	84993	PAR30FL12L/940/T20/LED	4000	94	975	25,000	40°	1/48	120	75W	Yes
12	E26	84994	PAR30FL12L/950/T20/LED	5000	94	975	25,000	40°	1/48	120	75W	
15	E26	84995	PAR38FL15/927/T20/LED	2700	94	1250	25,000	40°	1/30	120	90W	Yes
15	E26	84996	PAR38FL15/930/T20/LED	3000	94	1250	25,000	40°	1/30	120	90W	Yes
15	E26	84997	PAR38FL15/940/T20/LED	4000	94	1250	25,000	40°	1/30	120	90W	Yes
15	E26	84998	PAR38FL15/950/T20/LED	5000	94	1250	25,000	40°	1/30	120	90W	

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase.

Must be operated with an ambient fixture temperature between -4°F(-20°C) and 122°F(50°C).

Energy savings based on \$0.11 kWh over a 50,000 hour life.