

# KT-ALED140PS-M1-3-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

**DESCRIPTION**

High-Performance Pole-Mount LED Area Light  
 Premium Package | Power Select | Color Select |  
 120–277V Input | Bronze Housing

**APPLICATION**

Pole-mount outdoor illumination needs (including parking lots, auto dealerships, pathways, roadways, recreational venues, and other general area lighting requirements)



**PRODUCT FEATURES**

- Compact, low-profile design delivers high-performance illumination and improves application site aesthetics
- Heavy-duty, die-cast aluminum housing with ample heat sinking for enhanced thermal performance
- True U0 design for Dark Sky compliant performance eliminates undesirable sky glow
- Keystone Power Select technology (140/100/70W)
- Keystone Color Select technology (3000/4000/5000K)
- 3-pin twist-lock photocell included along with integrated NEMA/ANSI C136.41 7-pin-twist lock receptacle and shorting cap, covers control needs and variables
- Pre-installed, adjustable pole mount kit with Type III fixture optics, ideal for multi-headed pole applications
- Integral latch design for hassle-free, hinged access to driver compartment
- Bi-level occupancy sensor accessory available
- Reversible glare shield available, suitable for backside (house-side) or frontside (street-side) shielding
- Powered by Keystone 0–10V dimming LED driver featuring 12V AUX power tap, 6kV surge protection
- Ambient operating temperature: –40°C/–40°F to 50°C/122°F
- UL Certified for wet locations, IP65
- 0–10V dimming, 10% min
- Power factor: >0.95
- THD: <20%
- LED chip lifetime: L70 >100,000 hrs @ 25°C/77°F ambient fixture temp
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions

**ELECTRICAL SPECIFICATIONS**

Catalog Number	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimming	CRI	Dist Type	Rated Life	Legacy Equivalent	Housing Color*
KT-ALED140PS-M1-3-PMA-8CSB-VDIM-P	140W	3000K	18,200	130 lm/W	120–277V	0–10V	>80	III	50,000 hrs	175–400W MH	Bronze
		4000K	19,880	142 lm/W							
		5000K	19,600	140 lm/W							
	100W	3000K	13,200	132 lm/W							
		4000K	14,500	145 lm/W							
		5000K	14,200	142 lm/W							
	70W	3000K	9,380	134 lm/W							
		4000K	10,360	148 lm/W							
		5000K	10,150	145 lm/W							

\* Fixtures (and mounts) with alternate housing colors are available and made to order. Extended lead times apply. See catalog number breakdown for full ordering code details.

**KT-ALED140PS-M1-3-PMA-8CSB-VDIM-P**  
POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

**PHYSICAL SPECIFICATIONS**

**POLE-MOUNT LED AREA LIGHT FIXTURE**

**PACKAGING**


Carton Quantity	1 piece
Carton Dimensions	27.95\"L x 16.73\"W x 6.69\"H
Carton Weight	8.87 lbs

**ADJUSTABLE POLE MOUNT KIT DRILLING HOLES**

# KT-ALED140PS-M1-3-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### WIRING DIAGRAM

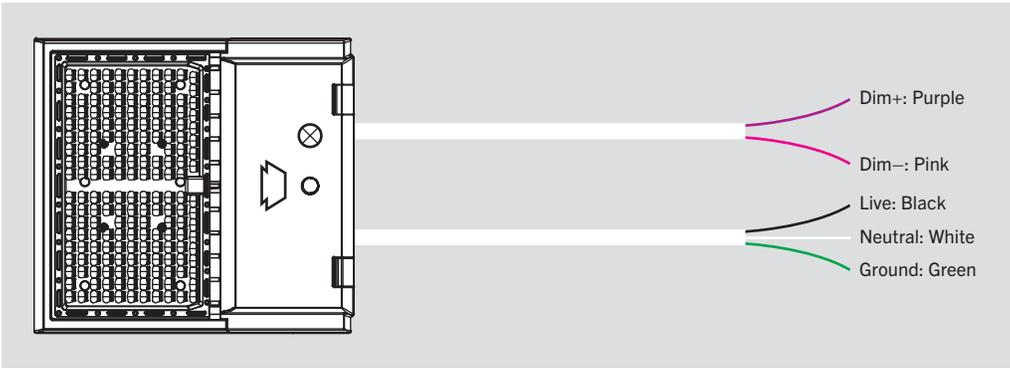

- This fixture comes pre-wired with a 7-pin twist-lock receptacle with shorting cap. Make input connections as needed and ensure connections are protected from exposure to the elements.
- Input voltage rating: 120–277V
- Ensure that input voltage on site matches the fixture you intend to install.

### POWER SELECT (WATTAGE) AND COLOR SELECT (CCT) ADJUSTMENT


This fixture is equipped with field-adjustable Keystone Power Select and Color Select technology.

1. Ensure power is off to the fixture.
2. Open the driver compartment located on the underside of the fixture.
2. Adjust switches to desired settings.




#### POWER SELECT ADJUSTMENT SWITCH

Set switch to adjust wattage between 140W, 100W, and 70W.

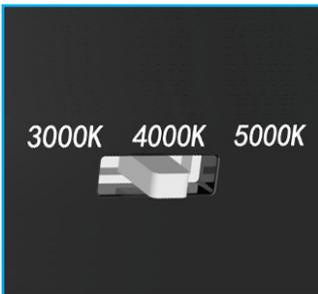

#### COLOR SELECT ADJUSTMENT SWITCH

Set switch to adjust CCT between 3000K, 4000K, and 5000K.

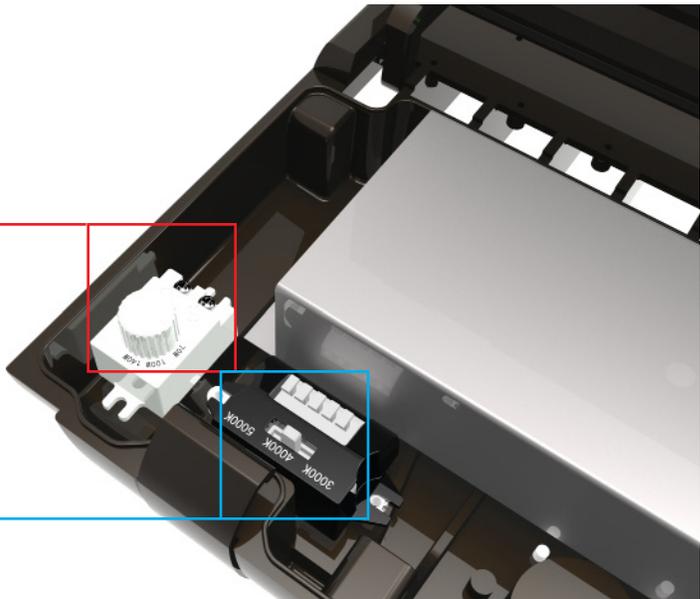


# KT-ALED140PS-M1-3-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### LIGHT DISTRIBUTION PATTERN

#### TYPE 3 (III)

Pole-mount view from above; Area light mounted at 30'

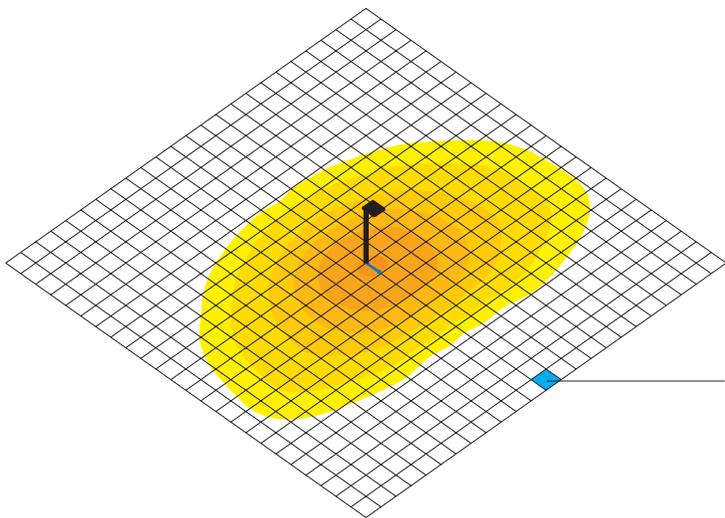


- Photometric layout for general reference only
- Grid dimension: 10 × 10 sq ft




### PHOTOMETRIC SPECIFICATIONS (TYPE 3 [III])

#### ISOCANDELA PLOT

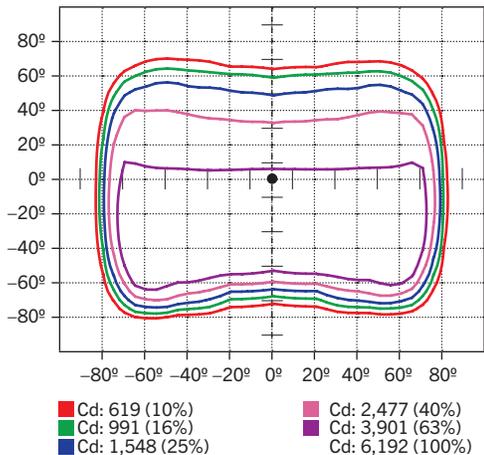

#### LUMINOUS INTENSITY DISTRIBUTION

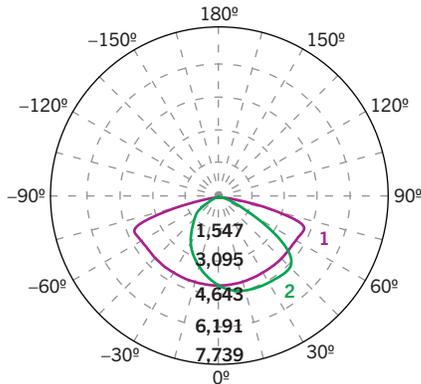

Average diffuse angle (50%): 124.0°

- 1 Violet C0 – C180
  - 2 Green C90 – C270
- Unit: cd

#### FLUX DISTRIBUTION

Zone	Lumens	% Luminaire
<b>Forward Light</b>	10,439 lm	64.1%
0°–30°	1,884 lm	11.6%
30°–60°	5,335 lm	32.8%
60°–80°	3,016 lm	18.5%
80°–90°	204 lm	1.3%
<b>Back Light</b>	5,837 lm	35.9%
0°–30°	1,491 lm	9.2%
30°–60°	2,970 lm	18.3%
60°–80°	1,317 lm	8.1%
80°–90°	59 lm	0.4%
<b>Up Light</b>	0 lm	0.0%
90°–100°	0 lm	0.0%
100°–180°	0 lm	0.0%

BUG* Rating	
Asymmetrical Luminaire Types	
Type I, II, III, IV	B3 U0 G3
Quadrilateral Symmetrical Luminaire Types	
Type V, Area Light	B3 U0 G2

\* Backlight, Uplight, Glare



# KT-ALED140PS-M1-3-PMA-8CSB-VDIM-P


## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### EPA SPECIFICATIONS

#### MEDIUM-SIZE FIXTURE HOUSING

- Conditions: Horizontal winds only for calculations. Worst case total projected area used for calculations.
- All drag coefficients are set as worst case 1.2.
- For details on exact EPA calculations and assumptions, please contact [productsupport@keystonetech.com](mailto:productsupport@keystonetech.com)

EPA Calcs (1.2*ft^2   View)		Single Fixture	2 Fixtures at 90°	2 Fixtures at 180°	3 Fixtures at 90°	3 Fixtures at 120°	4 Fixtures at 90°	2 Fixtures Side-by-Side	3 Fixtures Side-by-Side	4 Fixtures Side-by-Side
Mounting Application	Fixture Position									
Adjustable Pole Mount 	Horizontal	0.50 sq. ft.	0.78 sq. ft.	1.01 sq. ft.	1.19 sq. ft.	1.28 sq. ft.	1.19 sq. ft.	0.74 sq. ft.	1.11 sq. ft.	1.48 sq. ft.
Adjustable Pole Mount 	45°	1.27 sq. ft.	1.73 sq. ft.	1.27 sq. ft.	2.20 sq. ft.	3.10 sq. ft.	2.20 sq. ft.	2.53 sq. ft.	3.80 sq. ft.	5.07 sq. ft.



# KT-ALED140PS-M1-3-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

**ACCESSORIES (SOLD SEPARATELY)**

**GLARE SHIELD**

Catalog Number	Description	UPC	Easy Code
KT-ALED-GS-M1-KIT	Reversible Glare Shield Kit; Medium (fits "M1" fixture bodies); Bronze Housing	843654131801	DHT-23



**MICROWAVE OCCUPANCY SENSOR**


Catalog Number	Description	UPC	Easy Code
KTS-MW3-12V-PKO	12V Microwave Occupancy Sensor	843654130637	TRM-32



**REMOTE CONTROL**

Catalog Number	Description	UPC	Easy Code
KTS-MW3-REMOTECONTROL	Remote Control for KTS-MW3-12V-XX Sensors, Sets/adjusts all sensor performance parameters	843654132020	XSR-61





# KT-ALED140PS-M1-3-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

**ORDERING INFORMATION**

ORDER CODE	PACK QTY.	UPC	Easy Code
KT-ALED140PS-M1-3-PMA-8CSB-VDIM-P	1	843654138947	JJR-13

**CATALOG NUMBER BREAKDOWN**

# KT-ALED140PS-M1-3-PMA-8CSB-VDIM-P

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15

- 1** Keystone Technologies
- 2** Fixture Type
- 3** LED Technology
- 4** Max Wattage
- 5** Power Select
- 6** Size/ Shape
- 7** Style/ Design Designation
- 8** Distribution Type
- 9** Mounting
- 10** 80 CRI
- 11** Color Select
- 12** Color Select Designation
- 13** Dimming
- 14** Stock Package
- 15** Housing Color

**2 Fixture Type**

A

 Area Light

**6 Size/ Shape**

M

 Medium

**7 Style/ Design Designation**

**8 Distribution Type**

3

 Type 3 (III)

**9 Mounting**

PMA

 Adjustable Pole Mounting

**12 Color Select Designation**

B

 3000/4000/5000K

**13 Dimming**

VDIM

 0-10V

**15 Housing Color**

(Blank)

 Bronze