



# KT-LED11T8-48G-8XX-S /G3


## T8 LED LAMP

### DESCRIPTION

11W T8 LED | 3000–5000K | >80 CRI | High-Efficiency | Ballast Compatible



<b>LAMP TYPE:</b> Linear
<b>BULB TYPE:</b> T8 LED
<b>BASE TYPE:</b> G13 (Medium Bi-Pin)
<b>WATTAGE:</b> 11W
<b>COLOR TEMPERATURE:</b> 3000–5000K
<b>COLOR RENDERING INDEX (CRI):</b> >80
<b>WARRANTY:</b> 5 Years

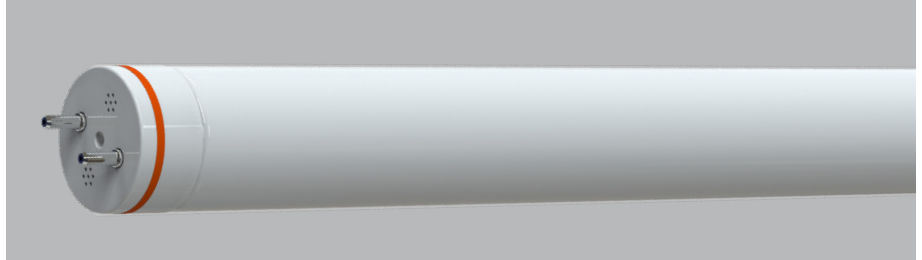

### PRODUCT FEATURES

- Compatible with most instant- and program-start electronic T8 ballasts. Contact Keystone for Ballast Compatibility List
- Dimmable via dimmable ballasts
- Not compatible with fluorescent emergency ballasts; Keystone K1 kits are recommended for emergency applications
- Direct replacement for the following fluorescent lamps: F32T8/32W, F32T8/30W, F32T8/28W, F32T8/25W
- Instant startup
- Frosted lens eliminates pixelation

- Environmentally friendly: No mercury used
- Operating temperature: -20°C/-4°F to 45°C/113°F
- 130+ lumens per watt (bare lamp efficacy)
- 50,000+ hour lifetime
- Suitable for dry and damp locations
- UL Listed; Listed on DLC Qualified Product List
- NSF Listed: NSF/ANSI Standard 2—Food equipment, splash zone (not for direct food zone without additional fixture considerations)


### ELECTRICAL AND PERFORMANCE SPECIFICATIONS

Catalog Number	Nom. Length	Input Voltage	Bare Lamp Wattage	Color Temp.	Nom. Lamp Lumens	System Wattage*		Initial Lumens*		Efficacy		CRI	Beam Angle	Power Factor	Max. THD
						0.78BF	0.88BF	0.78BF	0.88BF	System	Nom. Bare Lamp				
KT-LED11T8-48G-830-S /G3	48"	Ballast dependent	11W	3000K	1750	12W	13W	1520	1750	126 lm/W	160 lm/W	>80	210°	>0.9	20%
KT-LED11T8-48G-835-S /G3				3500K	1750	12W	13W	1520	1750	126 lm/W	160 lm/W				
KT-LED11T8-48G-840-S /G3				4000K	1800	12W	13W	1570	1800	128 lm/W	164 lm/W				
KT-LED11T8-48G-850-S /G3				5000K	1800	12W	13W	1570	1800	128 lm/W	164 lm/W				


\* Nominal values. Actual values may vary depending on electronic ballast used.

### PHOTOMETRIC CHARACTERISTICS

#### SPECTRAL DISTRIBUTION

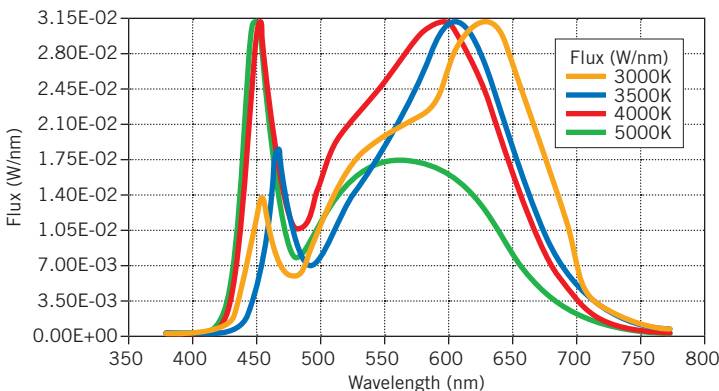

#### POLAR CANDELA DISTRIBUTION

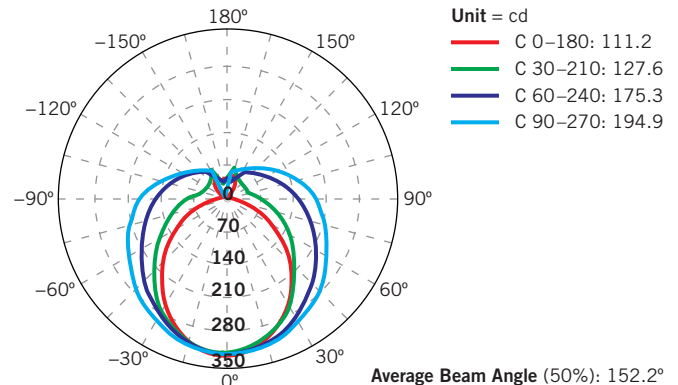




# KT-LED11T8-48G-8XX-S /G3

## T8 LED LAMP

### WIRING

**Plug and Play:** Simply replace the existing fluorescent lamp with Keystone Smart Drive LED lamp. No changes to the existing fluorescent ballast wiring needed. For ballast compatibility questions, please contact Keystone.

### PHYSICAL CHARACTERISTICS

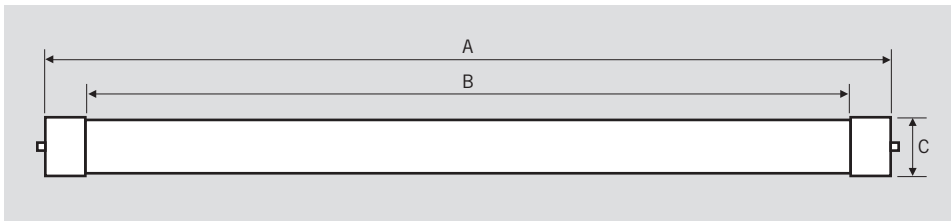

#### LAMP DIMENSIONS

A (Body Length)	47.15"
B (Illuminated Length)	44.70"
C (Diameter)	1.00"

**NOMINAL LENGTH:** 48"

**BASE TYPE:** G13 (Medium Bi-Pin)

### ORDERING INFORMATION

ORDER CODE	CARTON QUANTITY	UPC	EASY CODE
KT-LED11T8-48G-830-S /G3	25	843654136325	HME-72
KT-LED11T8-48G-835-S /G3	25	843654136332	DDQ-97
KT-LED11T8-48G-840-S /G3	25	843654136349	EZT-28
KT-LED11T8-48G-850-S /G3	25	843654136356	UFJ-20

### CATALOG NUMBER BREAKDOWN

# KT-LED11T8-48G-8XX-S /G3

1 2 3 4 5 6 7 8 9 10

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Type
- 5 Nominal Length (Inches)
- 6 Glass Construction
- 7 >80 CRI
- 8 Color Temperature
- 9 Smart Drive Series
- 10 3rd Generation