



ESSENTIAL SERIES
GENERAL PURPOSE LED BULBS



KT-LED9A19-O-8CSF

60W REPLACEMENT LAMP

DESCRIPTION

9W A19 Lamp | Color Select | ≤80 CRI | Omni-Directional



LAMP TYPE: A19
BASE TYPE: E26 (Medium)
WATTAGE: 9W
COLOR TEMPERATURE: 2700/3000/3500/4000/5000K
COLOR RENDERING INDEX (CRI): ≤80
WARRANTY: 3 Years
RATED LIFE: L70 (15,000 Hours)



TYPICAL APPLICATIONS

- Table, Desk, and Floor Lamps
- Wall Sconces
- Surface Mount Ceiling Fixtures
- General Lighting
- Pendant Lights

PRODUCT FEATURES

- Energy efficient: 80%+ savings and less heat generation vs legacy equivalents
- Long life that minimizes replacement and maintenance costs
- Durable plastic housing for lower risk of breakage
- Smooth diffused lens for comfortable, glare free performance
- ANSI compliant construction that ensure fitment in intended applications

- Suitable for damp locations
- Suitable for totally enclosed luminaires
- UL Listed
- Forward phase dimmable to 10%
- Operating temperature range -4°F/-20°C to 113°F/45°C
- Power factor: > 0.75
- Complies with Part 15 of FCC

ELECTRICAL AND PERFORMANCE SPECIFICATIONS

Keystone Catalog Number	Wattage	CCT	Lumens	Efficacy	CRI	Input Voltage	Beam Angle	Legacy Equivalent Wattage	Dimmable	Size/Shape
KT-LED9A19-O-8CSF	9W	2700K	750	83 lm/W	> 80	120V	200°	60W halogen	Yes	A19
		3000K	800	89 lm/W						
		3500K	800	89 lm/W						
		4000K	800	89 lm/W						
		5000K	800	89 lm/W						




ESSENTIAL SERIES
GENERAL PURPOSE LED BULBS



KT-LED9A19-O-8CSF

60W REPLACEMENT LAMP

PHYSICAL CHARACTERISTICS

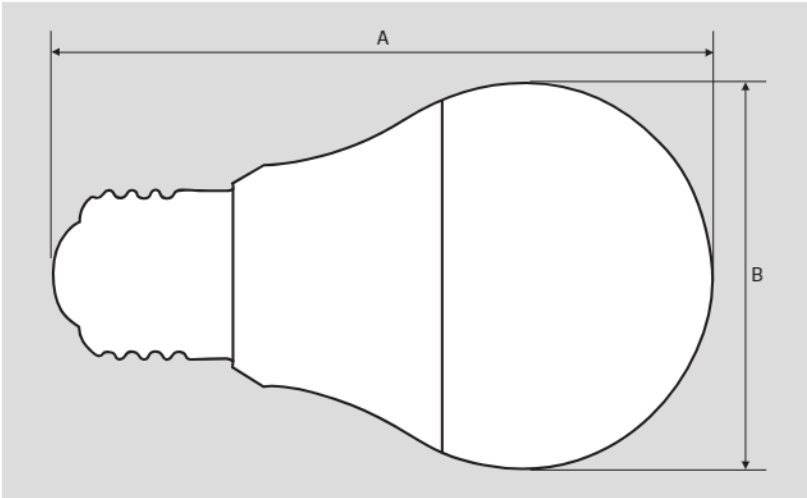

PACKAGING

Carton Quantity	60 pcs
Carton Dimensions	15.12" x 12.68" x 10.16"
Carton Weight	5.12 lbs

LAMP DIMENSIONS

A (Length)	3.94"
B (Diameter)	2.36"

BASE TYPE: E26 (Medium)

ORDERING INFORMATION

CATALOG NUMBER	CARTON QUANTITY	EASY CODE	UPC
KT-LED9A19-O-8CSF	60 pcs	HK1-73	843654103617

CATALOG NUMBER BREAKDOWN

KT-LED9A19-O-8CSF

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8

1 Keystone Technologies

2 LED Lamp

3 Wattage

4 Lamp Shape

5 Omni-Directional

6 80 CRI

7 Color Select

8 Color Select Designation

8 Color Select Designation

F	2700/3000/3500/4000/5000k
---	---------------------------