



**ESSENTIAL SERIES**  
GENERAL PURPOSE LED BULBS



# KT-LED9BR30-8CSF

## 65W REPLACEMENT LAMP

### DESCRIPTION

9W BR30 Lamp | Color Select | > 80 CRI | Wide Flood Distribution

<b>LAMP TYPE:</b> BR30
<b>BASE TYPE:</b> E26 (Medium)
<b>WATTAGE:</b> 9W
<b>COLOR TEMPERATURE:</b> 2700/3000/3500/4000/5000K
<b>COLOR RENDERING INDEX (CRI):</b> > 80
<b>WARRANTY:</b> 3 Years
<b>RATED LIFE:</b> L70 (15,000 Hours)



Enclosed  
Fixture Rated



### TYPICAL APPLICATIONS

- Recessed downlights
- Track lighting
- Surface-mount ceiling fixtures

### PRODUCT FEATURES

- Energy efficient: 80%+ savings and less heat generation vs legacy equivalents
- Long life that minimizes replacement and maintenance costs
- Durable plastic housing for lower risk of breakage
- Smooth diffused lens for comfortable, glare free performance
- ANSI compliant construction that ensure fitment in intended applications
- Suitable for damp locations
- Suitable for enclosed fixtures
- UL Listed
- Forward phase dimmable to 10%
- Operating temperature range -4°F/-20°C to 95°F/35°C
- Power factor: > 0.75
- Complies with Part 15 of FCC


### ELECTRICAL AND PERFORMANCE SPECIFICATIONS

Keystone Catalog Number	Wattage	CCT	Lumens	Efficacy	CRI	Input Voltage	Beam Angle	Legacy Equivalent Wattage	Dimmable	Size/Shape
KT-LED9BR30-8CSF	9W	2700K	750	83 lm/W	> 80	120V	100°	65W halogen	Yes	BR30
		3000K	800	89 lm/W						
		3500K	800	89 lm/W						
		4000K	800	89 lm/W						
		5000K	800	89 lm/W						

# KT-LED9BR30-8CSF

## REPLACEMENT LAMP

### PHYSICAL SPECIFICATIONS

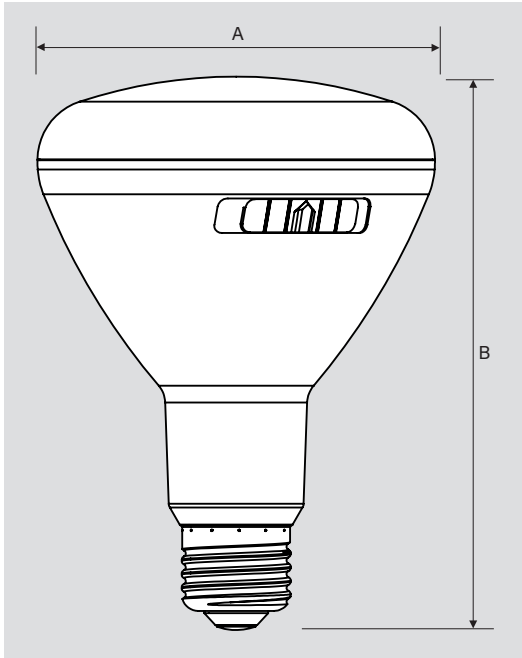

### LAMP DIMENSIONS

A (Diameter)	3.78"
B (Length)	5.22"

BASE TYPE: E26 (Medium)

### PACKAGING

Carton Quantity	24 pcs
Carton Dimensions	15.91" x 12.05" x 12.17"
Carton Weight	3.97 lbs

### ORDERING INFORMATION

ORDER CODE	CARTON QUANTITY	EASY CODE	UPC
KT-LED9BR30-8CSF	24 pcs	EAX-03	843654104126

### CATALOG NUMBER BREAKDOWN

# KT-LED9BR30-8CSF

1 2 3 4 5 6 7

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Shape
- 5 80 CRI
- 6 Color Select
- 7 Color Select Designation

### 7 Color Select Designation

F	2700/3000/3500/4000/5000K
---	---------------------------