



XFIT

KT-WLED33-4-8XX-VDIM /G2

LED WRAP FIXTURE

DESCRIPTION

LED wrap fixture

APPLICATION

Used for commercial, retail, and residential wrap applications



5 YEAR
WARRANTY



PRODUCT FEATURES


- High quality, high performance design while maintaining traditional fluorescent aesthetic
- Powered by Keystone 0-10V dimmable LED driver
- Can be used with existing mounting infrastructure with minimal changes to the environment
- Luminaire is suitable for installation within a clothes closet storage space
- Over 50% energy savings compared to traditional fluorescent fixtures
- Operating temperature: -20°C/-4°F to 50°C/122°F
- Luminaire is suitable for installation within a clothes closet storage space.

**Note: Fixture is not compatible with emergency backups. Not suitable for end-to-end through wiring.*

PERFORMANCE SPECIFICATIONS

Catalog Number	Color Temperature	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
KT-WLED33-4-835-VDIM /G2	3500K	4'	120-277V	33W	80	4,220	128 lm/W
KT-WLED33-4-840-VDIM /G2	4000K	4'	120-277V	33W	80	4,257	129 lm/W
KT-WLED33-4-850-VDIM /G2	5000K	4'	120-277V	33W	80	4,290	130 lm/W


PHYSICAL SPECIFICATIONS

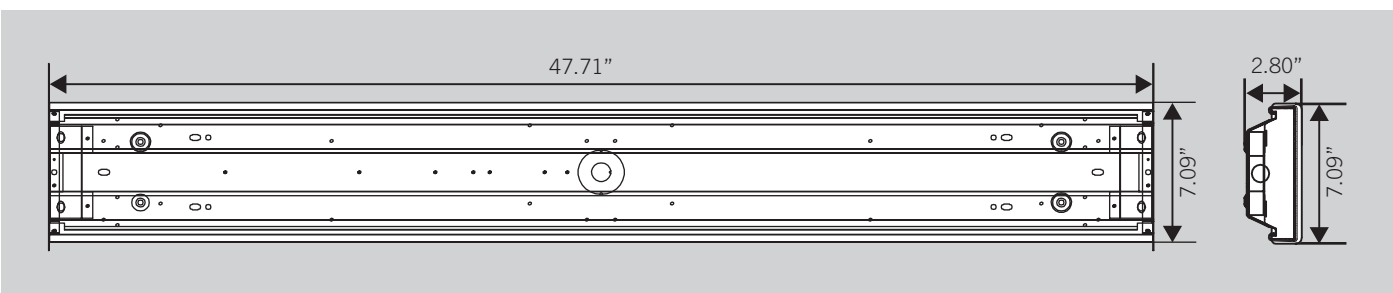

KT-WLED33-4-8XX-VDIM /G2

LED WRAP FIXTURE

CONSTRUCTION OVERVIEW

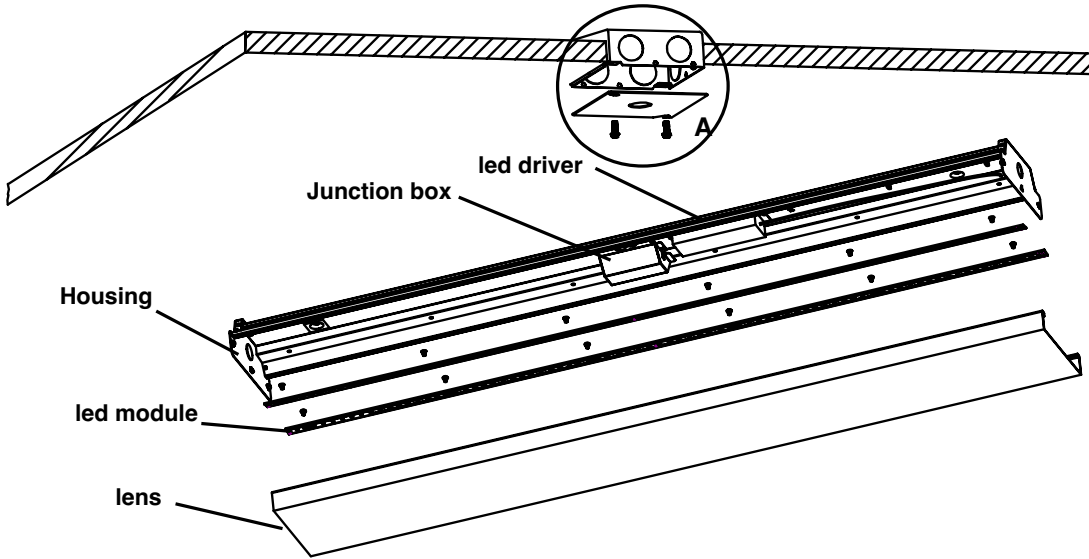

KT-WLED33-4-8XX-VDIM /G2


LED WRAP FIXTURE

ACCESSORIES

CORD SETS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/515P6	KT-CS-515P-6-18/3	Cord set for high bay; 125V NEMA 5-15P; straight blade plug; 6' SJTOW cable; 18/3 wire	843654140124	UKH-26
	/L715P10	KT-CS-L715P-10-16/3	Cord set for high bays; 277V NEMA L7-15P; twist lock plug; 10' SJTOW cable; 16/3 wire	843654140131	SFV-88
	/L615P10	KT-CS-L615P-10-16/3	Cord set for high bays; 250V NEMA L6-15P; twist lock plug; 10' SJTOW cable; 16/3 wire	843654140148	ZQS-05
	/L515P10	KT-CS-L515P-10-16/3	Cord set for high bays; 250V NEMA L5-15P; twist lock plug; 10' SJTOW cable; 16/3 wire	843654140155	GVH-22
	/L715P6	KT-CS-L715P-6-16/3	Cord set for high bays; 277V NEMA L7-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140162	DVU-44
	/L615P6	KT-CS-L615P-6-16/3	Cord set for high bays; 250V NEMA L6-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140179	LCW-66
	/L515P6	KT-CS-L515P-6-16/3	Cord set for high bays; 250V NEMA L5-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140186	POC-82
	/NP10	KT-CS-NP-10-16/3	Cord for high bays; no plug; inners 1/2" strip on both ends; 10' SJTOW cable; 16/3 wire	843654140193	YOH-90
	/NP6	KT-CS-NP-6-16/3	Cord for high bays; no plug; inners 1/2" strip on both ends; 6' SJTOW cable; 16/3 wire	843654140216	HUB-73
	/NP15	KT-CS-NP-15-16/3	Cord for high bays; no plug; inners 1/2" strip on both ends; 15' SJTOW cable; 16/3 wire	843654140209	EYD-18



Cord Sets

* FOR FACTORY INSTALLATION OF ACCESSORY, ADD SUFFIX TO FIXTURE PART NUMBER (SEE ORDERING EXAMPLES AND INSTRUCTIONS ON LAST PAGE OF SPEC SHEET).
 NOTE: FOR CORD SETS NOT LISTED HERE, PLEASE CONTACT YOUR KEYSTONE SALES REP.

STEP-DOWN TRANSFORMERS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/480 [†]	KTAT-250-480-277 /SF	Fully enclosed, single flex step-down transformer for LED high bay fixtures (250VA or lower)	843654102931	XIM-17



Step-Down Transformer
 KTAT-250-480-277 /SF

* FOR FACTORY INSTALLATION OF ACCESSORY, ADD SUFFIX TO FIXTURE PART NUMBER (SEE ORDERING EXAMPLES AND INSTRUCTIONS ON LAST PAGE OF SPEC SHEET).
[†] FACTORY INSTALLATION OF STEP-DOWN TRANSFORMER UNITS WILL AUTOMATICALLY INCLUDE ANY RELEVANT MOUNTING BRACKET.
[‡] STEP-DOWN TRANSFORMERS CANNOT BE ORDERED IN CONJUNCTION WITH STANDARD SJTOW CORD SET OPTIONS (CONTACT KEYSTONE SALES REP FOR AVAILABLE CUSTOM OPTIONS IF NEEDED).



KT-WLED33-4-8XX-VDIM /G2

LED WRAP FIXTURE

ORDERING INFORMATION

Catalog Number	Pack Quantity	UPC	EASY CODE
KT-WLED33-4-835-VDIM /G2	1	843654140483	YBK-71
KT-WLED33-4-840-VDIM /G2	1	843654140490	EWV-53
KT-WLED33-4-850-VDIM /G2	1	843654140506	IXB-16

CATALOG NUMBER BREAKDOWN

KT-WLED33-4-8XX-VDIM /G2


1 2 3 4 5 6 7 8

- 1 Keystone Technologies
- 2 LED Wrap Fixture
- 3 Wattage
- 4 4' Nominal Length
- 5 80 CRI
- 6 Color Temperature
- 7 0-10V Dimming
- 8 Second Generation

ORDERING EXAMPLES


FIXTURE WITH TWO FACTORY-INSTALLED ACCESSORIES*

KT-WLED33-4-8XX-VDIM /G2 /L715P6/480




FIXTURE WITH SINGLE FACTORY-INSTALLED ACCESSORY

KT-WLED33-4-8XX-VDIM /G2 /L715P6



FIXTURE WITH NO FACTORY-INSTALLED ACCESSORIES

KT-WLED33-4-8XX-VDIM /G2



* WHEN ORDERING MORE THEN ONE FACTORY-INSTALLED ACCESSORY, USE MULTIPLE SUFFIXES AS SHOWN IN THE ORDERING EXAMPLES ABOVE.
 NOTE: ALL ACCESSORIES CAN ALSO BE ORDERED SEPARATELY FOR FIELD INSTALLATION USING JUST THEIR REGULAR CATALOG NUMBER, UPC, OR EASY CODE.

KEYSTONE FIXTURE	
CATALOG NUMBER	
KT-WLED44PS-4-8CSA-VDIM	

CORD SETS	
SUFFIX	CATALOG NUMBER
✓ /L715P6	KT-CS-L715P-6-16/3

STEP-DOWN TRANSFORMERS	
SUFFIX	CATALOG NUMBER
✓ /480	KTAT-250-480-277 /SF

NOTE: STEP-DOWN TRANSFORMERS CANNOT BE ORDERED IN CONJUNCTION WITH STANDARD SJTOW CORD SET OPTIONS (CONTACT KEYSTONE SALES REP FOR AVAILABLE CUSTOM OPTIONS IF NEEDED).