



## T5 MINI : TUBES

### DESCRIPTION

LED T5 Miniature Tubes provide an efficient alternative to small fluorescent T5 tubes. Line voltage operation and PET coating ensure simple, easy installation, long life and durability.

### FEATURES

- Replaces F4T5, F6T5, F8T5 and F13T5 fluorescent tubes
- Double-end powered
- Operates on 120-277V line voltage
- PET coated to protect against shattering

### WARRANTY

- 5 year limited warranty; see eiko.com for warranty details

### APPLICATIONS

- Commercial
- Vending machines
- Gaming
- Hospitality




<b>PERFORMANCE</b>	Power Consumption	2W	3W	4W	7W
	Lumens	150	250	340	675
	Efficacy (LPW)	75	83	85	96
	CRI	80+			
	Beam	160°			
	CCT	4000K			
	Life (L70)	50,000 hours			
<b>ELECTRICAL</b>	Power Factor	≥0.7			
	Input Voltage	120-277V			
<b>CONSTRUCTION</b>	Operating Temperature	-4°F to 113°F (-20°C to 45°C)			
	Tube	T5			
	Lens	Frosted glass with PET coating			
	Base	G5			
<b>LISTINGS</b>	Certification(s)	cULus Classified; FCC			
	Material Usage	RoHS Compliant; no mercury			
	Environment	Dry or Damp			

## PERFORMANCE SUMMARY

Order Code	Item #	Length	Watts	Lumens	LPW	CCT	CRI	Volts	Replaces
10442	LED2WT5/6/840-DBL-G8	6"	2W	150	75	4000K	80+	120-277V	F4T5
10441	LED3WT5/9/840-DBL-G8	9"	3W	250	83	4000K	80+	120-277V	F6T5
10440	LED4WT5/12/840-DBL-G8	12"	4W	340	85	4000K	80+	120-277V	F8T5
10439	LED7WT5/21/840-DBL-G8	21"	7W	675	96	4000K	80+	120-277V	F13T5

NOTE: Use order code when ordering.

## DIMENSIONS

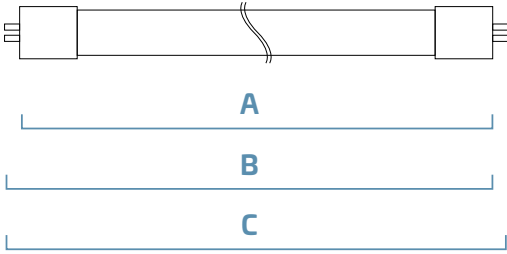

Lamp	A	B	C	D
	Max	Max	Max	Max
6"	5.4"/136mm	5.6"/143mm	5.9"/150mm	0.8"/21mm
9"	8.3"/212mm	8.6"/219mm	8.9"/226mm	0.8"/21mm
12"	11.3"/288mm	11.6"/295mm	11.9"/303mm	0.8"/21mm
21"	20.3"/517mm	20.6"/524mm	20.9"/531mm	0.8"/21mm

## WIRING DIAGRAM

