

LCFF SERIES RESIDENTIAL LIGHTING

LCFF-15-MCT5-BR
15" LED FABRIC DRUM

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

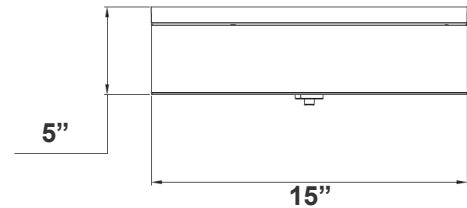

15" x 5"

LCFF-15 LCFF-18 LCFF-22 is created surface mount, rod suspension and wire suspension mount applications. Feature Driver on Board (DOB) technology, with no driver or transformer needed. Fabric lens make the light smooth, perfect for residential and commercial light.

Features

- Multi CCT (Selectable Switch on the LED Board)
- Bronze Finish
- 5-Year Warranty
- Multi CCT (Selectable Switch on back of the fixture)

Technical Specifications

Electrical:

- Voltage: 120V AC 50/60Hz
- Wattage: 25W
- Power Factor: >0.90
- Efficacy: 60 LPW

Mechanical:

- Bronze Finish
- Durable Punching Aluminum Housing with Translucent Diffuser
- Finished
- Fabric Material: Burlap Sack Cloth
- Surface mount and Suspension Installation
- Smooth Polycarbonate and Fabric cover Divers Smooth Lighting
- Maximum Ambient Temperature: 86°F to 104°F
- IP20 indoor only

Lighting:

- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- Total Lumens: 1400LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi CCT (Selectable Switch on back of the fixture)
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 120°
- Rated life: 50,000 Hrs

Applications:

- LCFF-15 LCFF-18 LCFF-22 is created surface mount, rod suspension and wire suspension mount applications. Feature Driver on Board (DOB) technology, with no driver or transformer needed. Fabric lens make the light smooth, perfect for residential and commercial light.

Other Models:



- 35W | 1800LM | LCFF-18-MCT5-BR
- 45W | 2100LM | LCFF-22-MCT5-BR




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co



Photometrics: LCFF-15-MCT5-BR



BUG Rating: B1-U3-G1

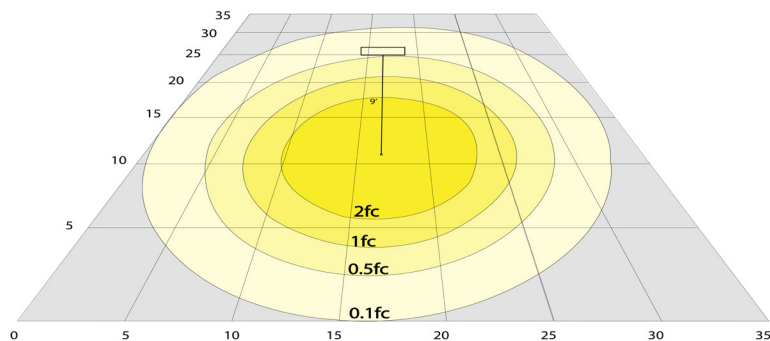


Area 35'x 35' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LCFF-15-MCT5-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LCFF-15-MCT5-BR	25W	120V	1400LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K	B1-U3-G1	60

Sample Ordering

Model	Size	Color Temp.	Finish
LCFF	15	MCT5	BR

Accessories:

Blank = No Option For Accessories

LCF-ROD-5-BR = 5in SUSPENSION ROD FOR CEILING FIXTURE SWIVEL CANOPY, Bronze
 LCF-ROD-12-BR = 12in SUSPENSION ROD FOR CEILING FIXTURE SWIVEL CANOPY, Bronze
 LCF-ROD-24-BR = 24in SUSPENSION ROD FOR CEILING FIXTURE SWIVEL CANOPY, Bronze
 LCF-ROD-36-BR = 36in SUSPENSION ROD FOR CEILING FIXTURE SWIVEL CANOPY, Bronze
 LCF-ROD-48-BR = 48in SUSPENSION ROD FOR CEILING FIXTURE SWIVEL CANOPY, Bronze
 LCF-CANOPY-S-BR = SWIVEL CEILING CANOPY FOR CEILING FIXTURES, Bronze
 LFCF-SK10-BR = 10FT 4LINE CANOPY SUSPENSION KIT FOR DECORATIVE LIGHTS, Bronze
 FML-ULK-MCT = 15W, 850LM, 30K/40K/50K UP LIGHT KIT

Accessories:



LCF-ROD-5-BR
LCF-CANOPY-S-BR
SHOWN WITH 5" ROD & CANOPY



LCF-ROD-12-BR
LCF-CANOPY-S-BR
SHOWN WITH 12" ROD & CANOPY



LCF-ROD-24-BR
LCF-CANOPY-S-BR
SHOWN WITH 24" ROD & CANOPY



LCF-ROD-36-BR
LCF-CANOPY-S-BR
SHOWN WITH 36" ROD & CANOPY



LCF-ROD-48-BR
LCF-CANOPY-S-BR
SHOWN WITH 48" ROD & CANOPY



LFCF-SK10
10FT 4LINE CANOPY SUSPENSION KIT
FOR DECORATIVE LIGHTS, Bronze

Example:

1. LCFF-15-MCT5-BR

(FOR LCFF 25W MCT5 FIXTURE 120V)

2. LCFF-15-MCT5-BR

(FOR LCFF 25W MCT5 FIXTURE 120V)

LCF-ROD-5-BR



(SUSPENSION ROD FOR CEILING FIXTURE SWIVEL CANOPY)



Rod & Canopy Drawings:




LCF-ROD-5-BR
LCF-CANOPY-S-BR
SHOWN WITH 5" ROD & CANOPY




LCF-CANOPY-S
SWIVEL CANOPY DIMENSION




LCF-ROD-12-BR
LCF-CANOPY-S-BR
SHOWN WITH 12" ROD & CANOPY

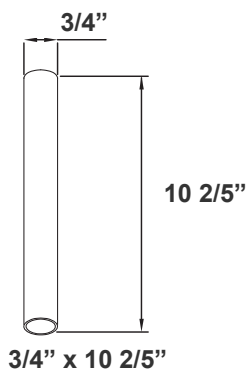


LCF-ROD-36-BR
LCF-CANOPY-S-BR
SHOWN WITH 36" ROD & CANOPY

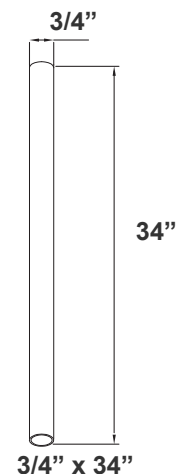


LCF-ROD-24-BR
LCF-CANOPY-S-BR
SHOWN WITH 24" ROD & CANOPY

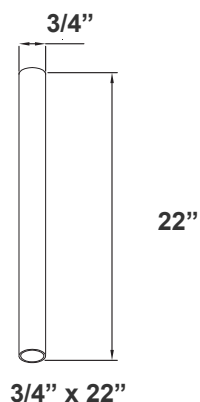


LCF-ROD-48-BR
LCF-CANOPY-S-BR
SHOWN WITH 48" ROD & CANOPY

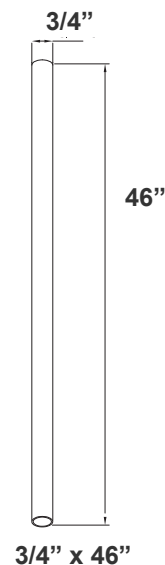

LFCF-SK10
10FT 4LINE CANOPY SUSPENSION KIT
FOR DECORATIVE LIGHTS, Bronze

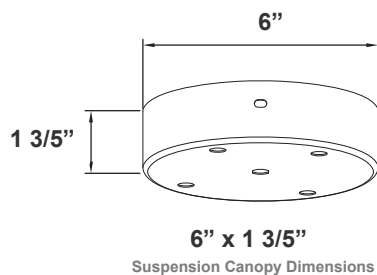

Suspension Canopy Dimensions

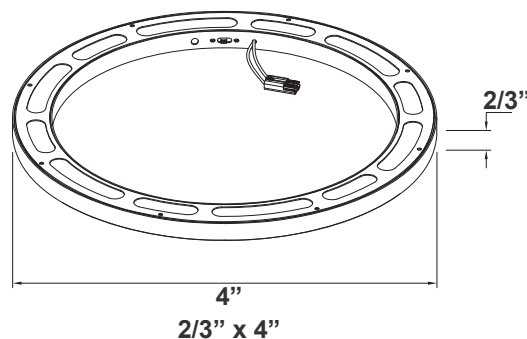

FML-ULK-MCT

15W, 850LM, 30K/40K/50K UP LIGHT KIT

