

LED-FSP-WH 4" & 6" Flat Square Panel

Project:	
Type:	
Catalog #:	

STANDARD FEATURES



Energy efficient LED Flat Square Panel provide quick and easy installation with no can required. Durable powder-coated diecast trim with enclosed J-box is attached with a water-tight connection. Pre-installed plastic clips for easy installation. The Round LED Flat Retrofit Kit can be used in new construction applications as a can-less downlight.

FEATURES

- Available in 4000k (neutral white) and 5000k (cool white) color temperatures.*
- Long-life LEDs provide 50,000 hours of operation with at least 70% of initial lumen output (L₇₀).*
- Standards for damp locations and insulated ceilings (IC-rated). Small, lightweight J-box standard.
- Dimmable down to 5% with most market dimmers (120V only).
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 90. Painted steel housing.

* Contact factory for other color temperatures and lumen packages.


** L₇₀ hours are IES TM-21-11 calculated hours.

WARRANTY & LISTINGS

- locations. Suitable for ambient temperatures from -20°C to 50°C (-4°F to 122°F).
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- Complies with FCC Part 15, class A.
- 5-year warranty of all electronics and housing.



DIMENSIONS

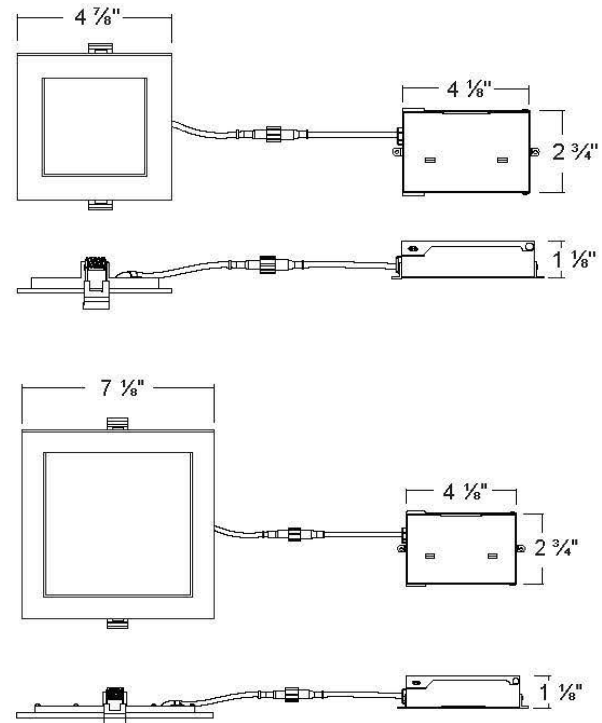

ORDERING INFORMATION

Example: LED-FSP-WH4-4k

Model	Color Temperature	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	ENERGY STAR®	Options (Order Separately)
LED-FSP-WH4	4K = 4000k	530	11	50	YES	
	5K = 5000k	530	11	50	YES	
LED-FSP-WH6	4K = 4000k	1030	16	53	YES	
	5K = 5000k	1030	16	53	YES	