LED Bollards

Product Description

LEDSION LED Bollard Light- fixture has a round appearance for good decorative effect, sized in 3.5ft height. For commercial applications, 50000hrs high efficiency led driver. Efficiency higher than 115 lm/W with zero up light.

Dark bronze polyester powder-coat finish.

Advantage

- > UL, DLC approved.
- ➤ Input voltage 120-277VAC.
- No UV or IR in the beam.
- Robust ground cage Pre-buried installation.
- Energy saving, long lifespan.
- Instant start, NO flickering, NO humming.
- Green and Eco-friendly without mercury.
- ➤ Drivers come standard with 1-10V dimming leads capable of variable dimming down to 10%.

Applications

Suitable for building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.











LED Bollard Light

Specifications

Model No.	LSBO26W		
Input Power	26W		
Lumen	2290LM		
Lumen Efficiency	115LM/W		
Color Temperature	3000K, 4000K, 5000K, 6000K		
CRI	>80		
Viewing Angle	360 Degree		
Input Voltage	120-277VAC 50/60Hz		
PF	≥0.9		
THD	≤20%		
Driver Brand	China brand driver		
LED Brand	PHILIP		
LED Type	SMD2835		
Dimmer	1-10V Dimming		
Housing	Aluminum+PC		
Housing Color	Brown		
Waterproof Rating	IP65		
Operating Temperature	-40℃ TO 40℃		
Operating Humidity	20%-90% RH		
Storage Temperature	-40°C TO 80°C		
Storage Humidity	10%-95% RH		
Warranty Time	5 Years		

Projected LED Lumen Maintenance

Operating hours	0	25000	50000
Lumen maintenance factor	1	0.91	0.8


Data references the extrapolated performance projections for the LED Bollard LED platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

LED Bollard Light

Structure



Dimensions:Inch

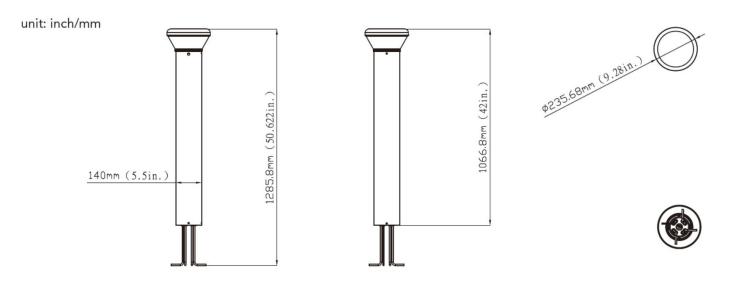

Package

Model No	Carton Size	Qty/Carton	Net Weight	Gross Weight
	(L×W×H)	(pcs)	(kg)	(kg)
LSBO26W	114×27×27cm	1	5.5	6.1