





LF4-150CW-SF LF4-150WW-SF

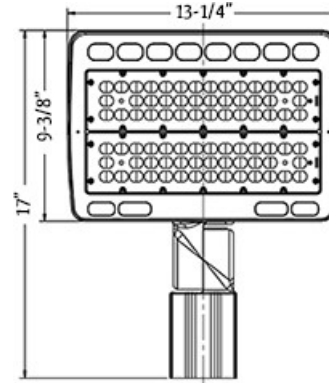

DIMENSIONS:

9-3/8" (H) x 13-1/4" (W) x 4-1/2" (D)

LF4 ARCHITECTURAL SERIES LED FLOOD LIGHT WITH SLIP FITTER

| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|--------------|-------|-------------|----------|------------|
| LF4-150CW-SF | 150W | 120~277V AC | 17000 LM | 5000K |
| LF4-150WW-SF | 150W | 120~277V AC | 17000 LM | 3000K |

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Great for use with motion sensors or other instant on/off controls.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 150W
- Input current: 1.7A Max
- Other wattages: 80W, 100W
- Power factor: >0.95
- Efficacy: 115LM/W

HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Operating temperature: -40°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- High light transmittance, anti-UV & fire resistant PC lens

CERTIFICATIONS: UL, DLC



LIGHTING SPECIFICATIONS:

- Dimmable: 0~10V Dimmable
- LED type/brand: Philips Lumileds LEDs / SMD 3030
- Total lumens: 17000LM
- Color temperature: 3000K / 5000K
- Color rendering index: >82
- Beam angle: 90° x 120°

WARRANTY: 5 years

