


LFX-MD SERIES Outdoor Lighting

LFX-MD-15-50W-30K-KN
LFX-MD-15-50W-40K-KN
LFX-MD-15-50W-50K-KN



Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

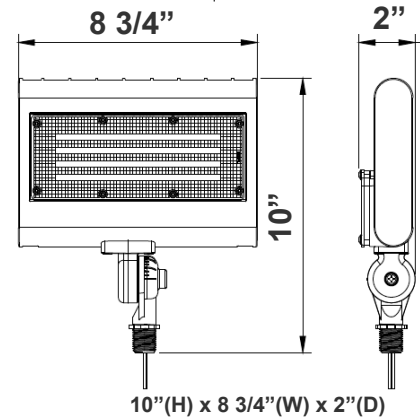

Features

- DLC Premium & LED High-Lumen Flood lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 70,000 Hours Rated Life
- 7-Year Warranty
- Optic Lens Type: III
- Multi-Power - The Switch is on the Bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: Selectable Wattages (15W/ 20W/ 30W/ 50W)
- Power Factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze and White Finish)
- LED: Philips Lumileds Luxeon 2835 High Flux LED
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 90° Adjustable 1/2" Knuckle Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Total Lumens: 6320LM Max.
- Multi-Power - The switch is on the bottom of the fixture
- Color Temperature: 3000K/ 4000K/ 5000K
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

Other Models:


- 15W | 1950LM | LFX-XS-15W-30K-KN
- 15W | 1950LM | LFX-XS-15W-30K-KN
- 15W | 1950LM | LFX-XS-15W-30K-KN
- 30W | 3900LM | LFX-SM-10-30W-30K-KN
- 30W | 3900LM | LFX-SM-10-30W-40K-KN
- 30W | 3900LM | LFX-SM-10-30W-50K-KN




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co



Photometrics: LFX-MD-15-50W-KN

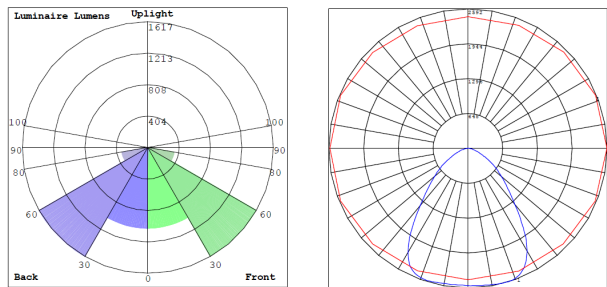

BUG Rating: B3-U0-G1

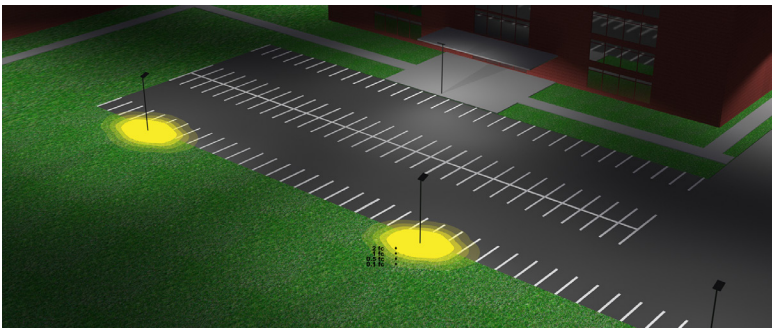

Area 45'x 55' Mounting Height: 20'

Other Views:



Side View



Front View



Back View

Performance Table: LFX-MD-15-50W-KN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFX-MD-15-50W-30K-KN	15W	120~277V	2180LM	3000K 4000K 5000K	B3-U0-G1	130
			2250LM			
			2300LM			
LFX-MD-15-50W-40K-KN	20W		2800LM			
			2900LM			
			3000LM			
			4050LM			
LFX-MD-15-50W-50K-KN	30W		4200LM			
			4300LM			
			6300LM			
LFX-MD-15-50W-50K-KN	50W		6500LM			
			6700LM			



Sample Ordering

Model	Size	Min.Wattage	Max.Wattage	Color Temp.	Mount
LFX	MD	15	50W		KN
30K = 3000K 40K = 4000K 50K = 5000K					

Accessories Options

Blank = No Option For Accessories
WRC-3-BRZ =Weatherproof cover with three(3) 1/2" hubs

ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ
Weatherproof cover with
Three
(3) 1/2" hubs



B-41



Mounts to landscape
post
or any 1/2" hub



Fully adjustable 1/2"
threaded knuckle for aiming
versatility

Color Options: Custom Color Available

Black

Silver

White

Dark Bronze
Default color

Green

Red

Yellow



Example:

1. LFX-MD-15-50W-30K-KN

(For LFX 15-50W 3000K fixture 120V-277V)
2. LFX-MD-15-50W-30K-KN
WRC-3-BRZ

(For LFX 15-50W 3000K fixture 120V-277V)
(Weatherproof cover with three(3) 1/2" hubs)

