


## PRODUCT DESCRIPTION:

The linear high bay is the lighting solution for a wide variety of applications and mounting heights. A choice of lumen outputs and color temperatures make the high efficacy the ideal solution for industrial warehouses, commercial facilities, gymnasiums, convention centers and other high bay application.

## FEATURES:

- Fixture body and endcaps are fabricated from aluminum for maximum rigidity.
- Lightweight aluminum heat sink designed to perform naturally convective cooling
- Suitable for hanging mount, surface mount or pendant mount
- 1-10V Dimming comes standard. Suitable for use with LED dimmers
- Motion sensor option available

## DIMENSIONS:

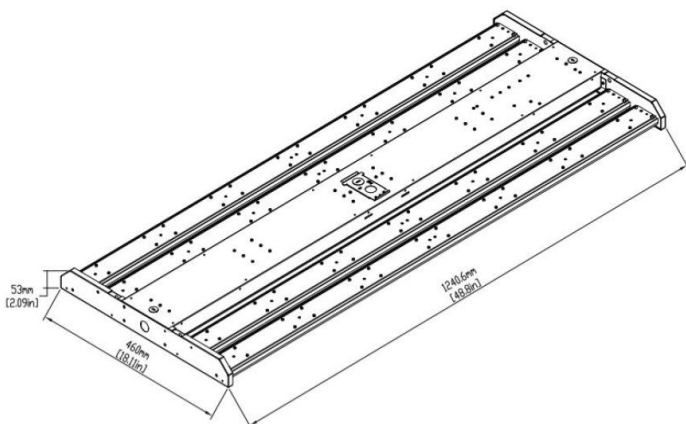

## LED Linear High Bay Spec

LOD-LHB220W-50K-HL



**SPECIFICATIONS:**

SPECIFICATION	Details
Model	LOD-LHB220W-50K-HL
Input Wattage (W)	220W
Lumens Delivered (LM)	37,570LM
Efficacy (LM/W)	170LM/W
CRI	80
Lifespan	50,000 hours
Color Temperature	5,000K
Dimmable	Yes
IP Rating	IP40
Beam Angle	120
Input Voltage	AC120-277V
Power Factor	0.9
Housing	Steel & Aluminum
Lens	Frosted
Mounting	Surface, hanging or pendant
Weight (LBS)	
THD	20%
Size (inches)	48.8" x 18.1" x 2.09"
Certification	UL, FCC, CE, RoHS, TUV, ISO9001
Operating Temperature	-20°C-40°C
Environment	Indoor
Warranty	5 years limited

4000K is a special-order request

