




## DIMENSIONS:

14-3/8"(W) x 52-1/8"(L) x 5"(H)

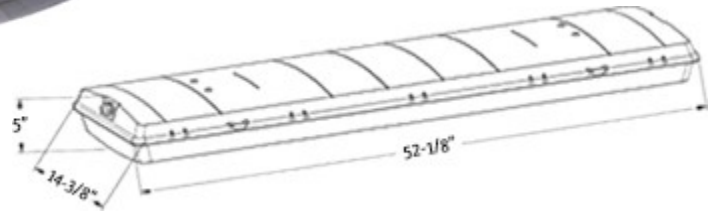

## LLVT-4FT-150W-50K-D LLVT-4FT-150W-40K-D

### LED LINEAR VAPOR LIGHT

Ideal for workshops, garages, canopies, parking garages, cold storage facilities, food processing facilities, farmyards, and other harsh, humid, dusty and wet environment lighting applications.

#### ELECTRICAL SPECIFICATIONS:

- Input Wattage: 150W
- Input Voltage: 120-277VAC 50/60Hz
- Other wattages: 100W
- Power factor: >0.95
- Efficacy: 100LM/W

#### HOUSING SPECIFICATIONS:

- Polycarbonate construction is highly impact resistant
- UV-stabilized Polycarbonate diffuser eliminates glare
- Diffuser crystals enhance even light distribution
- (10) Stainless Steel clips evenly seal the luminaire
- Operating temperature: -22°F~104°F
- Lifespan: 50000 Hrs.
- IP rating: Wet Locations

#### CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LLVT-4FT-150W-50K-D	150W	120~277V AC	15000LM	5000K
LLVT-4FT-150W-40K-D	150W	120~277V AC	15000LM	4000K

#### LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- LED type/brand: SMD Edison 2835
- Total lumens: 15000LM
- Color temperature: 4000K / 5000K
- Color rendering index: >82

#### WARRANTY: 5 years

