

Date: _____ Location: _____
 Product: _____ Project: _____
 Quantity: _____ Catalog #: _____

LED Multi Watt Multi CCT Vapor Tight High Bay



4FT
60W, 75W and 90W **or** **4FT**
120W, 150W and 180W

FEATURES

- Default Wattage is the highest wattage
 - 4FT – 90W
 - 4FT – 180W
- Default CCT: 5,000K
- IK10 & IP65 rating
- Dust-tight
- Auxiliary 12V output
- Linkable design (see below for details)
- 100,000 hours lifetime

SUITABLE APPLICATIONS

- Food / beverage factories
- Heavy manufacturing facilities
- Underground parking
- Refrigerated storage room
- Warehouse
- Tunnel

CONSTRUCTION:

PC housing and white cover with stainless steel clips.

OPTICAL SYSTEM:

Lumiled 2835 LED chips. 110° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

120-277V input standard.
-20°C to 40°C, -4°F to 104°F

INSTALLATION & MOUNTING:

Surface mount or suspension mount.

CONTROLS & DIMMING:

0-10V dimming comes standard. Suitable for use with LED dimmers. Auxiliary 12V output.




MODEL NUMBER	SIZE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-4FTVTHB-MW(60/75/90)MCCT(35/40/50)	4FT	60W	8,916LM	148.6LM/W	80	0.9	20%	4 32W LED tube
LOC-4FTVTHB-MW(60/75/90)MCCT(35/40/50)	4FT	75W	11,145LM	148.6LM/W	80	0.9	20%	4 32W LED tube
LOC-4FTVTHB-MW(60/75/90)MCCT(35/40/50)	4FT	90W	13,374LM	148.6LM/W	80	0.9	20%	2 59W LED tube

MODEL NUMBER	SIZE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-4FTVTHB-MW(120/150/180)MCCT(35/40/50)	4FT	120W	17,772LM	148.1LM/W	80	0.9	20%	250W MH
LOC-4FTVTHB-MW(120/150/180)MCCT(35/40/50)	4FT	150W	22,215LM	148.1LM/W	80	0.9	20%	320W MH
LOC-4FTVTHB-MW(120/150/180)MCCT(35/40/50)	4FT	180W	26,658LM	148.1LM/W	80	0.9	20%	400W MH

Series	Size	4FT Wattage (option 1)	4FT Wattage (option 2)	Color Temperature
LOC-4FTVTHB	4FT	60W 75W 90W	120W 150W 180W	3500K 4000K 5000K




MEASUREMENTS

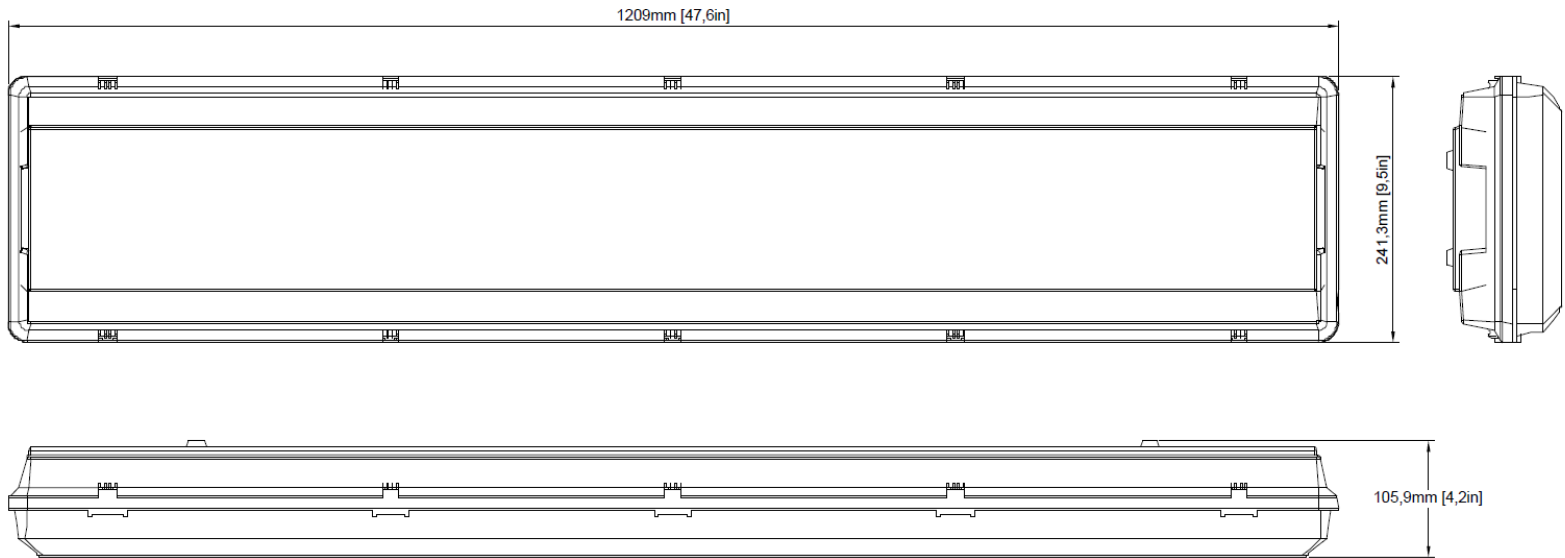

4FT

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-4FTVTHB-MW(60/75/90)MCCT(35/40/50)	1	lbs	00815586029686
LOC-4FTVTHB-MW(120/150/180)MCCT(35/40/50)	1	lbs	00810050940351




4FT 60W

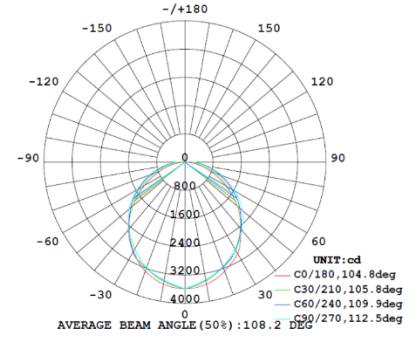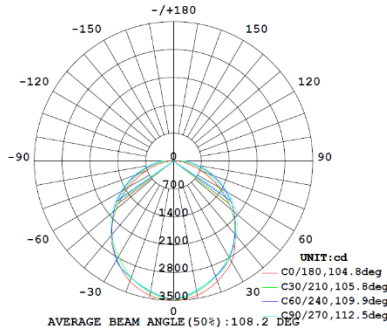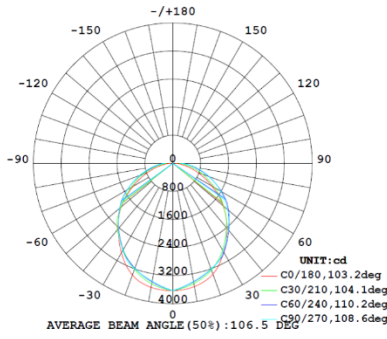

3,500K

4,000K

5,000K

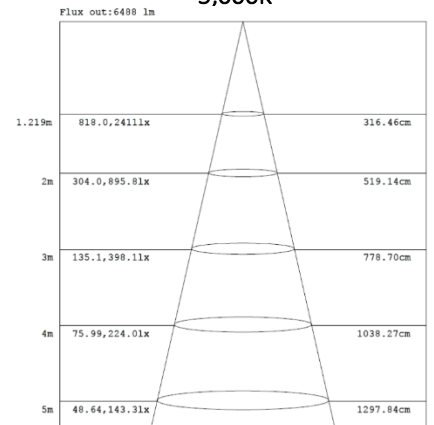
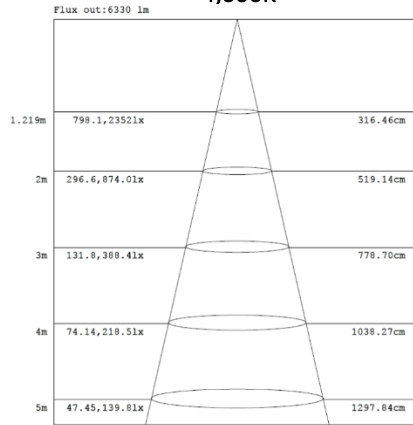
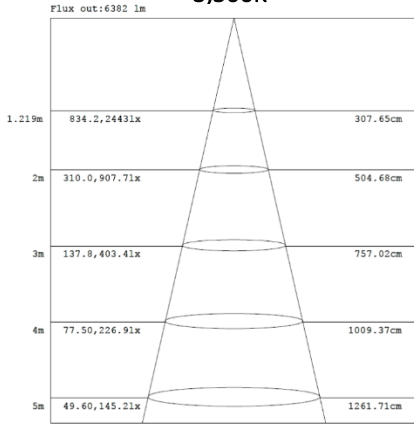


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.




4FT 75W

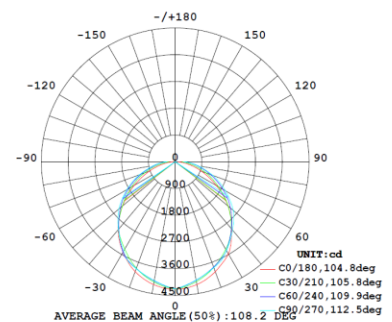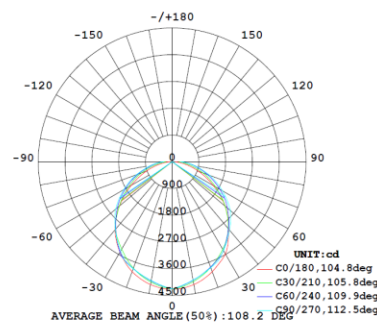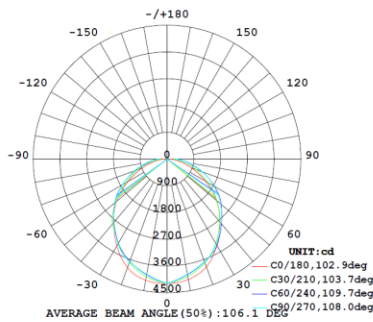

3,500K

4,000K

5,000K

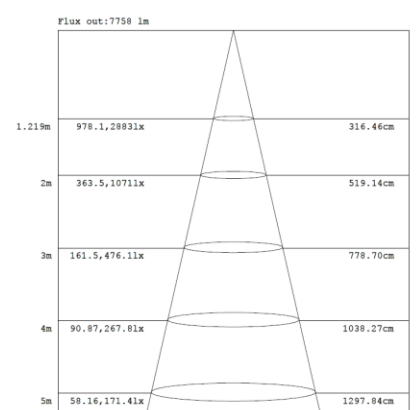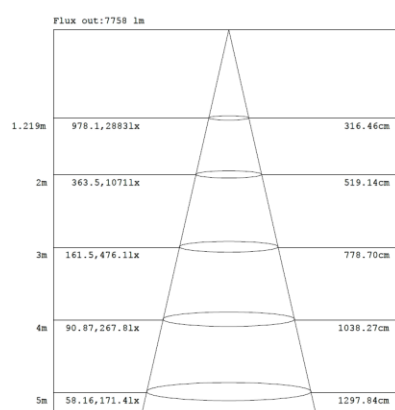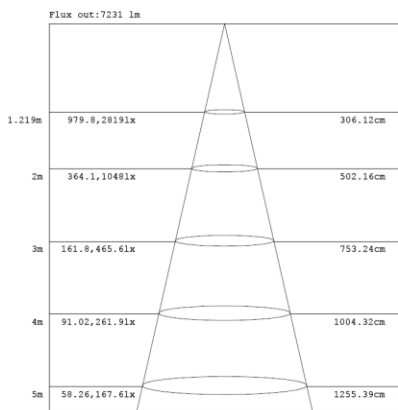


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


4FT 90W

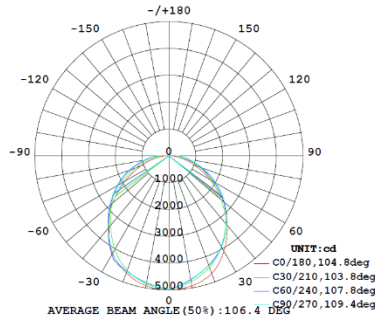


3,500K

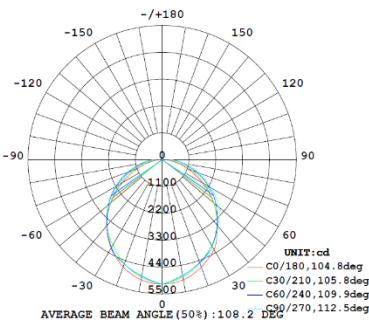


4,000K

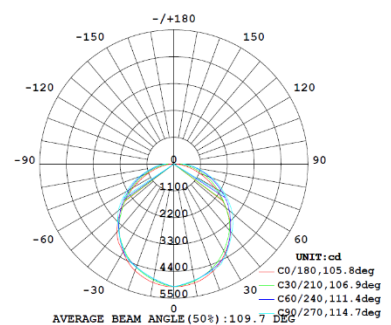


5,000K

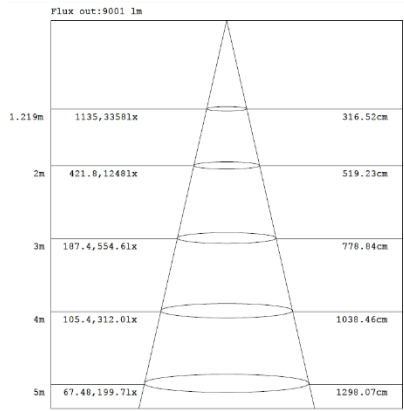

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

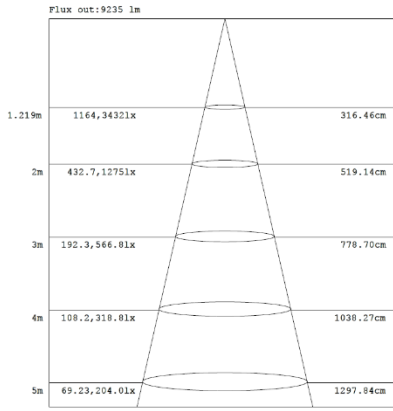


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

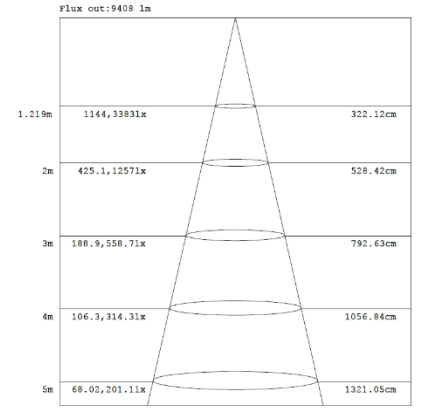


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


4FT 120W

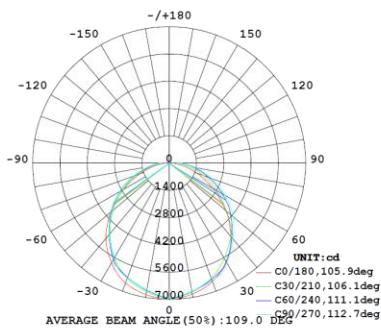


3,500K

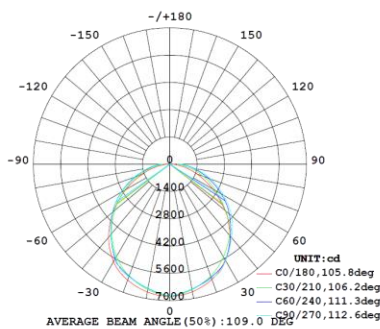


4,000K

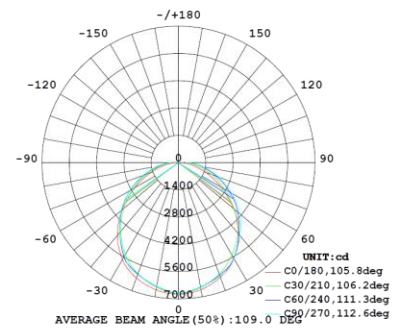


5,000K

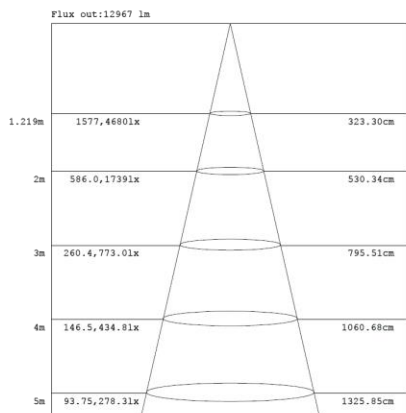

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

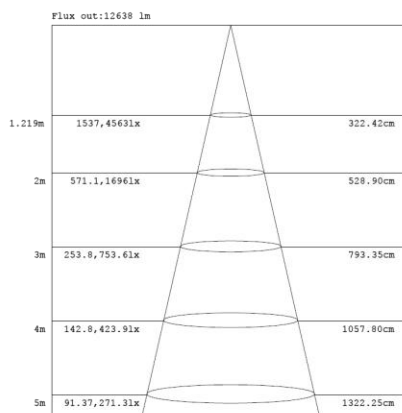


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

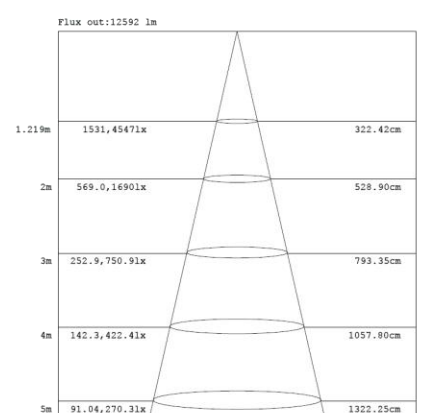


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


4FT 150W

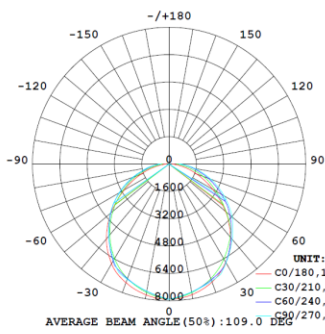


3,500K

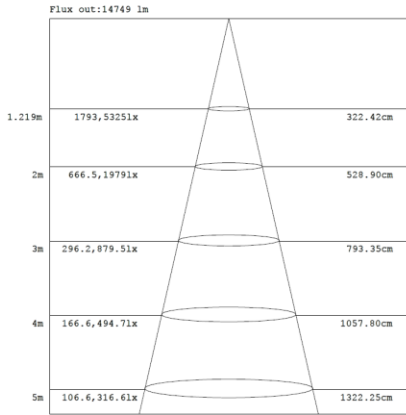


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

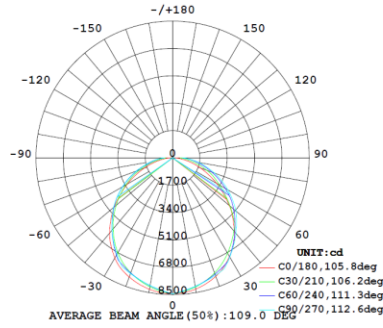


4,000K

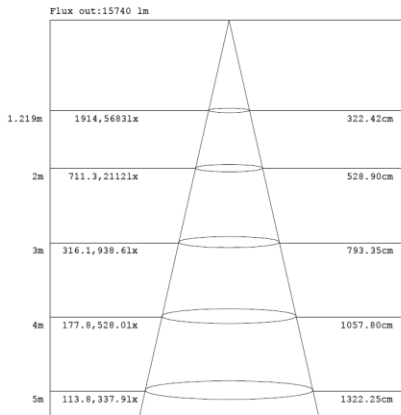

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

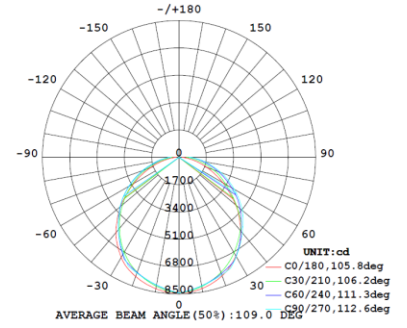


5,000K

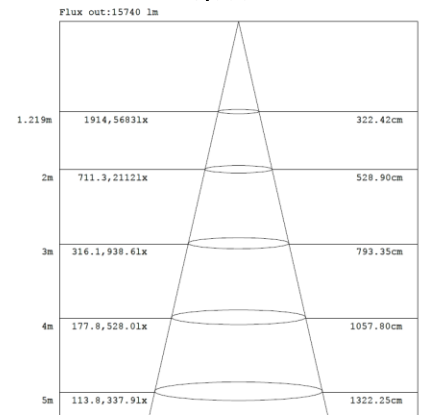


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


4FT 180W

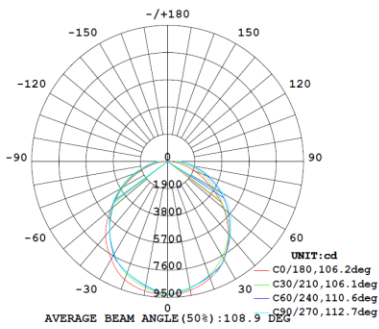


3,500K

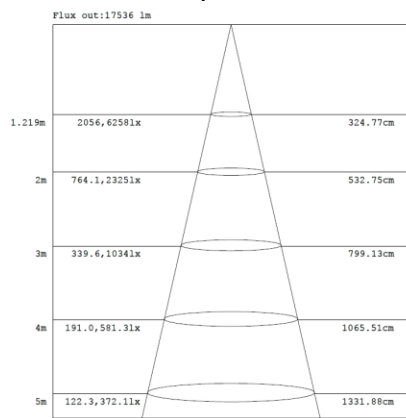


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

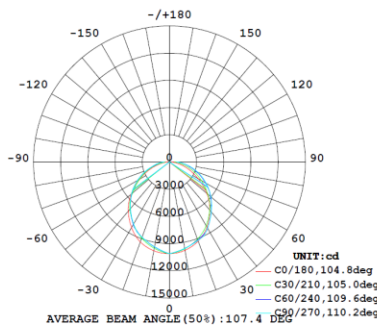


4,000K

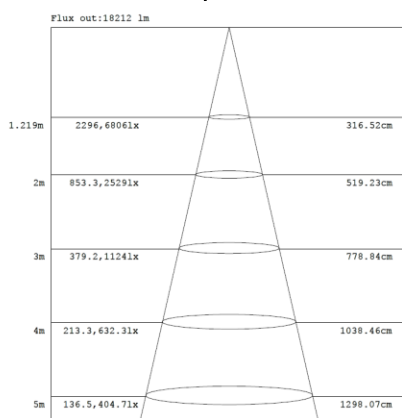

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

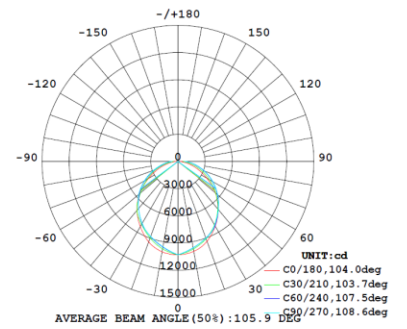

5,000K

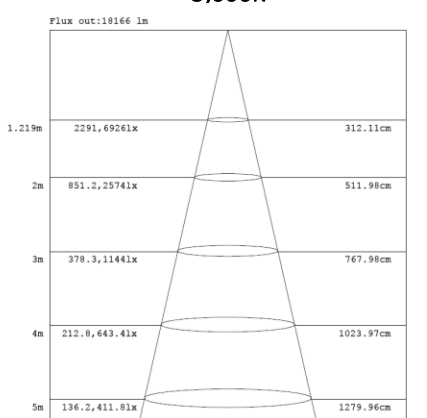

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Surface Mount



OPTIONAL ACCESSORIES



Emergency Back-up



Sensor



Remote Control
LOC-RC-100

LINKING TOGETHER

Model Number	Voltage (18AWG)	Linkable Qty	Voltage (16AWG)	Linkable Qty
LOC-4FTVTHB-MW(60/75/90)MCCT(35/40/50)	120V	10	120V	15
	240V	20	240V	30
	277V	24	277V	35
LOC-4FTVTHB-MW(120/150/180)MCCT(35/40/50)	120V	5	120V	8
	240V	10	240V	16
	277V	12	277V	18