

## LED 3 Multi Watt 4FT Wrap Around Light



### FEATURES

- Default Wattage: 48W
- Default CCT: 5,000K
- IP20 rated
- 50,000 hours lifetime

### SUITABLE APPLICATIONS

- Distribution Centers
- Aisles
- Corridors
- Restrooms
- Commercial Facilities
- Warehouses
- Stairwells
- Hallways

#### CONSTRUCTION:

22-gauge metal housing with matte white finish. PMMA cover lens.

#### OPTICAL SYSTEM:

Samsung 2835 LED chips. Frosted lens. 110° beam angle.

#### WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

#### ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

#### INSTALLATION & MOUNTING:

Suspension or surface mounting options.

#### CONTROLS & DIMMING:

0-10V dimming comes standard.



MODEL NUMBER	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-4FTWA-MW(32/40/48)MCCT(35/40/50)D	32W	3,680LM	115LM/W	81.6	0.969	17.2%	
LOC-4FTWA-MW(32/40/48)MCCT(35/40/50)D	40W	4,600LM	115LM/W	81.6	0.969	17.2%	
LOC-4FTWA-MW(32/40/48)MCCT(35/40/50)D	48W	5,814.72LM	120.5LM/W	81.6	0.969	17.2%	


#### DLC Product ID:

- LOC-4FTWA-MW(32/40/48)MCCT(35/40/50)D - S-YCUFDJ

# LED 3 Multi Watt 4FT Wrap Around Light


Series	4 FOOT	Color Temperature	Controls
LOC-4FTWA	32W 40W 48W	3500K 4000K 5000K	D = 0-10V Dimming

## MEASUREMENTS

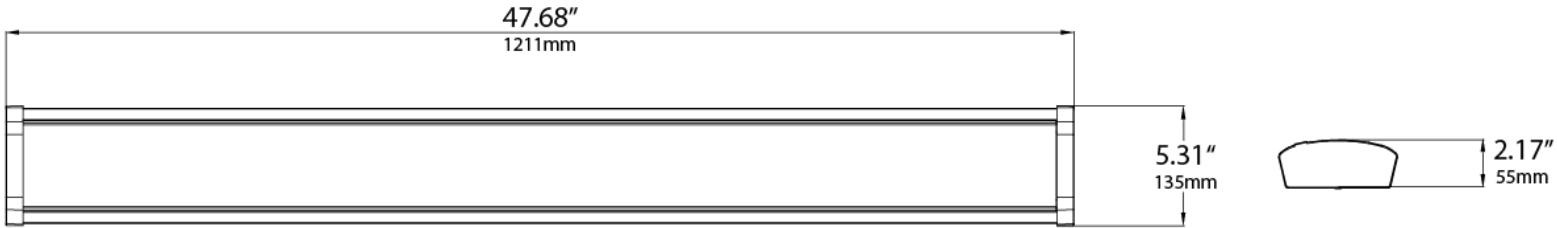

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-4FTWA-MW(32/40/48)MCCT(35/40/50)D	1	lbs	00810050942379

## PHOTOMETRIC

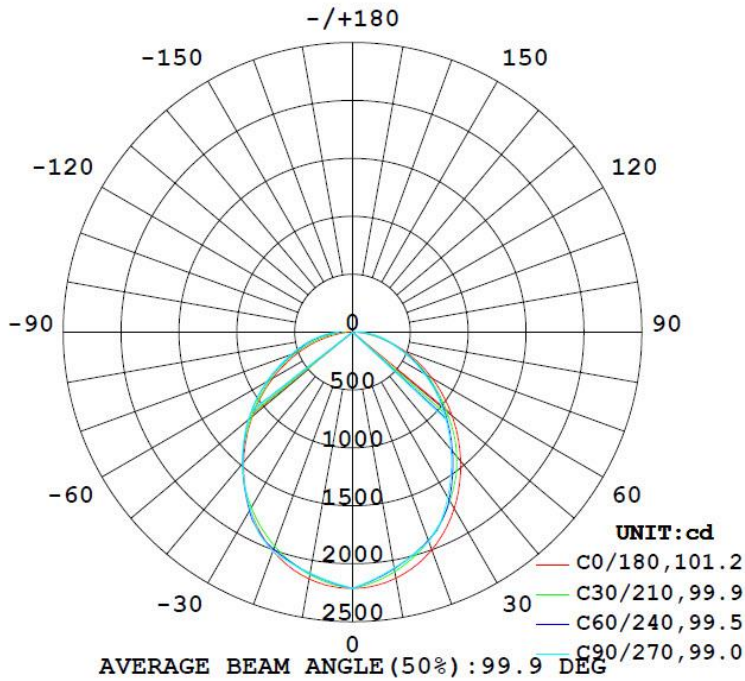

## OPTIONAL ACCESSORIES



Emergency Back-up