

LED Combo Exit Sign with Square Headlights Series

FEATURES

- 120V or 277V AC input
- UL 924 listed for damp locations (DL)
- Canopy included
- Long lasting LEDs
- Easy installation and maintenance
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Stairways
- Hallways
- Doorways
- Bathrooms
- Corridors



CONSTRUCTION:

High impact UV stabilized flame rated thermoplastic housing (UL94 V-0) Nickel Cadmium (Ni-Cad) battery meets UL 90-minute emergency lighting requirement. Test switch and AC-On indicator included.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120V/277V AC input. 0°C to 40°C (32°F to 104°F)

INSTALLATION & MOUNTING:


Wall, ceiling or end mount capabilities.



MODEL NUMBER	WATTAGE	EMERGENCY WATT	BATTERY	TEMPERATURE
LOC-EXIT-3.5WGLW-SCOM	3.5W	1.6W	Ni-cad 3.6V/1.2Ah	0°C to 40°C

Series	Wattage	Letter Color	Color	Style
LOC-EXIT	3.5W	GL = Green Letter	W = White Base	S = Round COM = Combo with head lights

MEASUREMENTS

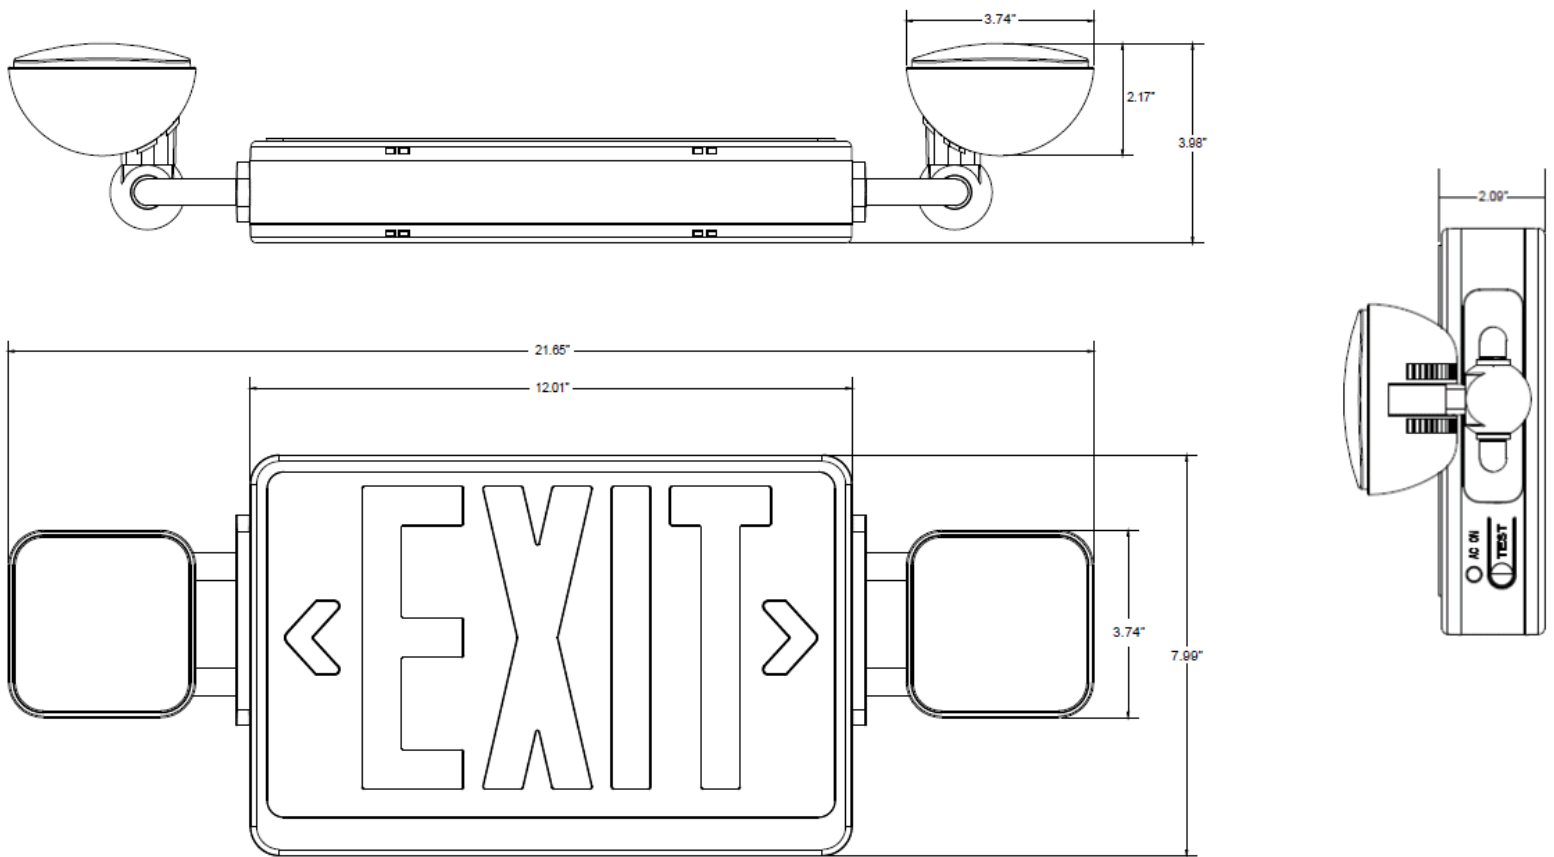

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-EXIT-3.5WGLW-SCOM	1	3.75 lbs	00815586029792