

Date: _____ Location: _____
 Product: _____ Project: _____
 Quantity: _____ Catalog #: _____

LED Multi Watt Multi CCT Tri-Proof Vapor Tight



FEATURES

- Default Wattage is the highest wattage
 - 8FT – 100W
 - 4FT – 50W
 - 2FT – 30W
- Default CCT: 5,000K
- IP65 rated
- UL 1598 suitable for wet location
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Factories
- Garage
- Parking lot

CONSTRUCTION:

PC housing and white cover.

OPTICAL SYSTEM:

Seoul 2835 LED chips. 110° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

120-277V input standard.
 -20°C to 40°C, -4°F to 104°F

INSTALLATION & MOUNTING:

Surface mount.

CONTROLS & DIMMING:

0-10V dimming.




MODEL NUMBER – 3,500K, 4,000K and 5,000K	SIZE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-2FTTPVT-MW(20/25/30)MCCT(35/40/50)D	2FT	20W	2,264LM	113.2LM/W	80	0.9	20%	
LOC-2FTTPVT-MW(20/25/30)MCCT(35/40/50)D	2FT	25W	2,830LM	113.2LM/W	80	0.9	20%	
LOC-2FTTPVT-MW(20/25/30)MCCT(35/40/50)D	2FT	30W	3,396LM	113.2LM/W	80	0.9	20%	
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D	4FT	30W	3,429LM	114.3LM/W	80	0.9	20%	
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D	4FT	40W	4,572LM	114.3LM/W	80	0.9	20%	
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D	4FT	50W	5,715LM	114.3LM/W	80	0.9	20%	
LOC-8FTTPVT-MW(60/80/100)MCCT(35/40/50)D	8FT	60W	6,865.2LM	114.42LM/W	80	0.9	20%	
LOC-8FTTPVT-MW(60/80/100)MCCT(35/40/50)D	8FT	80W	9,153.6LM	114.42LM/W	80	0.9	20%	
LOC-8FTTPVT-MW(60/80/100)MCCT(35/40/50)D	8FT	100W	11,442LM	114.42LM/W	80	0.9	20%	
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D-MS	4FT	30W	3,429LM	114.3LM/W	80	0.9	20%	
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D-MS	4FT	40W	4,572LM	114.3LM/W	80	0.9	20%	
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D-MS	4FT	50W	5,715LM	114.3LM/W	80	0.9	20%	


Series	Size	2FT Wattage	4FT Wattage	8FT Wattage	Color Temperature	Dimming	Features
LOC-#FTTPVT	2FT = 2 foot 4FT = 4 foot 8FT = 8 foot	20W 25W 30W	30W 40W 50W	60W 80W 100W	3500K 4000K 5000K	D = Dimmable	MS = Motion Sensor

MEASUREMENTS


2FT



4FT

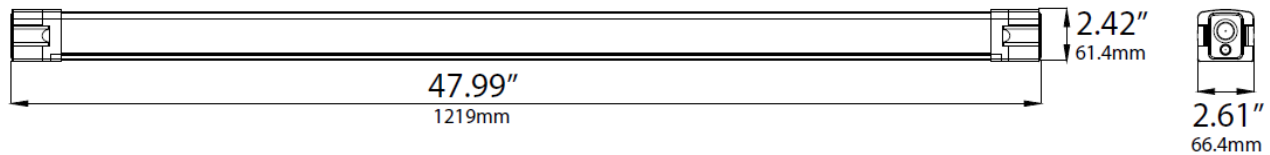

8FT

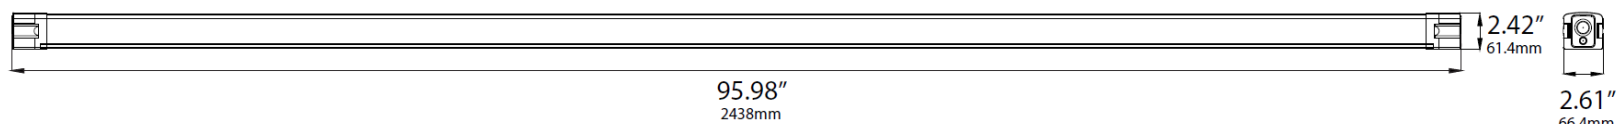

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-2FTTPVT-MW(20/25/30)MCCT(35/40/50)D	1	lbs	00810050942201
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D	1	lbs	00810050942218
LOC-8FTTPVT-MW(60/80/100)MCCT(35/40/50)D	1	lbs	00810050942225
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D-MS	1	lbs	00810050942232

OPTIONAL ACCESSORIES



Emergency Back-up



Sensor