

Date: _____ Location: _____
 Product: _____ Project: _____
 Quantity: _____ Catalog #: _____

LED Multi Watt Multi CCT Vapor Tight



2FT
20W, 25W and 30W



4FT
25W, 35W and 50W



8FT
60W, 75W and 90W

FEATURES

- Default Wattage is the highest wattage
 - 2FT – 30W
 - 4FT – 50W
 - 8FT – 90W
- Default CCT: 5,000K
- IK10 & P66 rating
- Glare-free / flicker-free lighting
- 100,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Schools
- Factories
- Offices
- Supermarkets
- Logistic Centers
- Exhibition Halls

CONSTRUCTION:

PC housing and white cover with stainless steel clips.

OPTICAL SYSTEM:

Lumiled 2835 LED chips. 110° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

120-277V input standard.
-20°C to 40°C

INSTALLATION & MOUNTING:

Surface mount or suspension mount.

CONTROLS & DIMMING:




0-10V dimming comes standard. Suitable for use with LED dimmers. Auxiliary 12V output.



MODEL NUMBER	SIZE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-2FTVT-MW(20/25/30)MCCT(35/40/50)	2FT	20W	2,600LM	130LM/W	>80	0.9	15%	2 17W LED tube
LOC-2FTVT-MW(20/25/30)MCCT(35/40/50)	2FT	25W	3,250LM	130LM/W	>80	0.9	15%	2 17W LED tube
LOC-2FTVT-MW(20/25/30)MCCT(35/40/50)	2FT	30W	3,900LM	130LM/W	>80	0.9	15%	2 32W LED tube
LOC-4FTVT-MW(25/35/50)MCCT(35/40/50)	4FT	25W	3,250LM	130LM/W	>80	0.9	15%	2 17W LED tube
LOC-4FTVT-MW(25/35/50)MCCT(35/40/50)	4FT	35W	4,550LM	130LM/W	>80	0.9	15%	2 17W LED tube
LOC-4FTVT-MW(20/25/50)MCCT(35/40/50)	4FT	50W	6,500LM	130LM/W	>80	0.9	15%	2 32W LED tube
LOC-8FTVT-MW(60/75/90)MCCT(35/40/50)	8FT	60W	7,800LM	130LM/W	>80	0.9	15%	2 32W LED tube
LOC-8FTVT-MW(60/75/90)MCCT(35/40/50)	8FT	75W	9,750LM	130LM/W	>80	0.9	15%	4 32W or 2 59W LED tube
LOC-8FTVT-MW(60/75/90)MCCT(35/40/50)	8FT	90W	11,700LM	130LM/W	>80	0.9	15%	4 32W or 2 59W LED tube

Series	Size	2FT Wattage	4FT Wattage	8FT Wattage	Color Temperature
LOC-2FTVT	2FT	20W	25W	60W	3500K
LOC-4FTVT	4FT	25W	35W	75W	4000K
LOC-8FTVT	8FT	30W	50W	90W	5000K



MEASUREMENTS

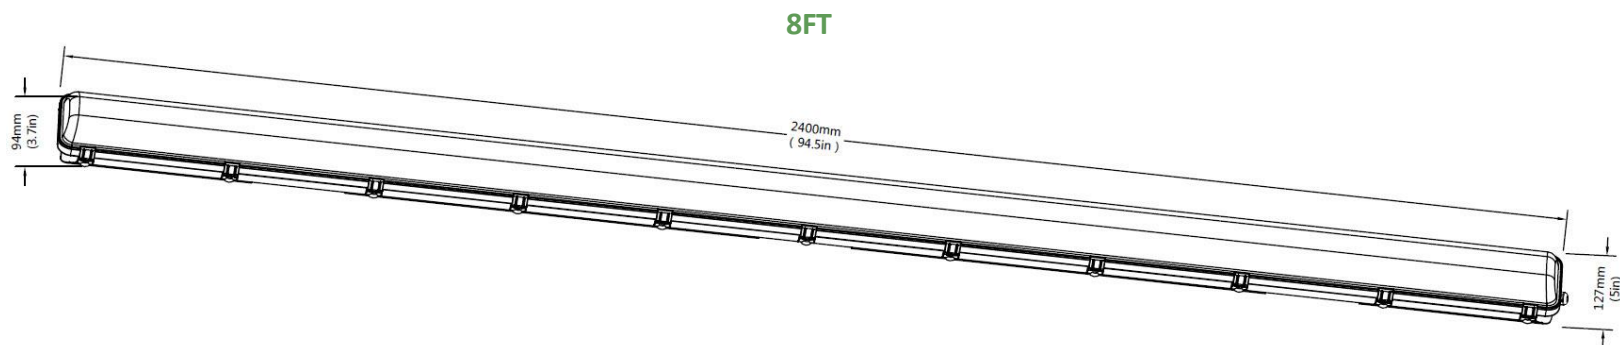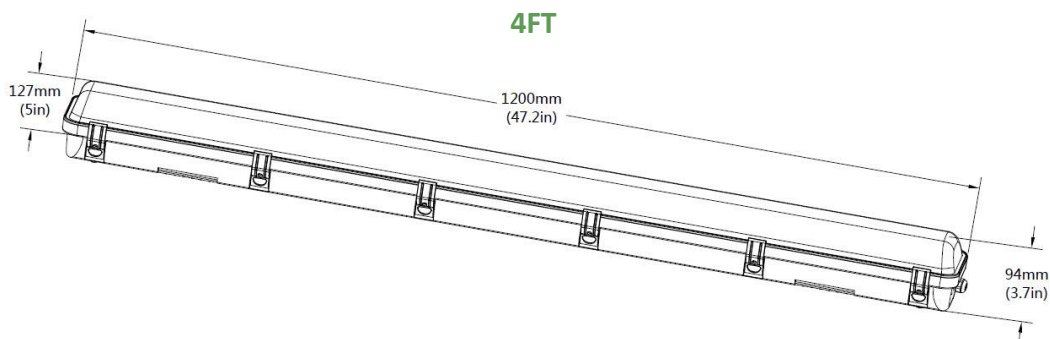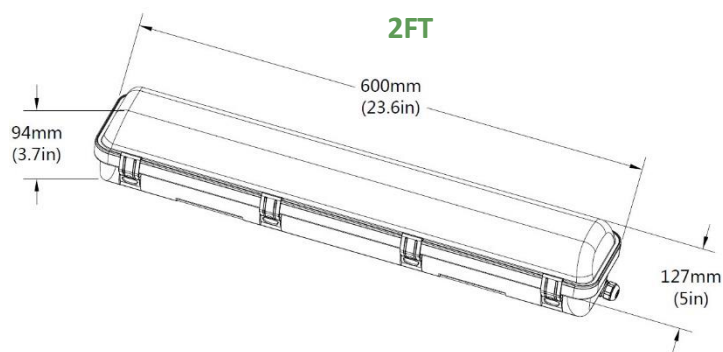

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-2FTVT-MW(20/25/30)MCCT(35/40/50)	1	lbs	00815586029716
LOC-4FTVT-MW(25/35/50)MCCT(35/40/50)	1	lbs	00815586029709
LOC-8FTVT-MW(60/75/90)MCCT(35/40/50)	1	lbs	00815586029723

2FT 20W



Flux out:1546 lm

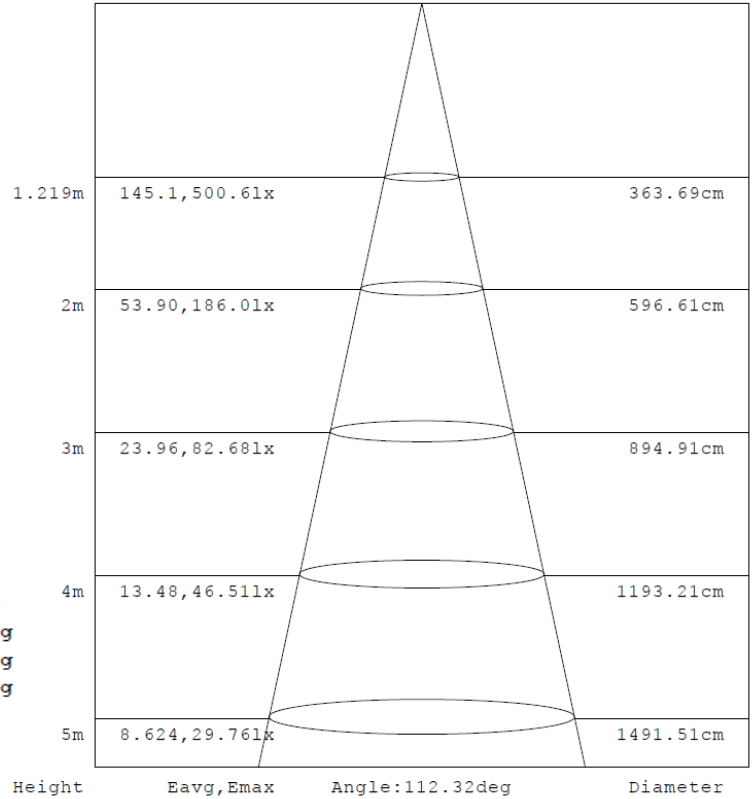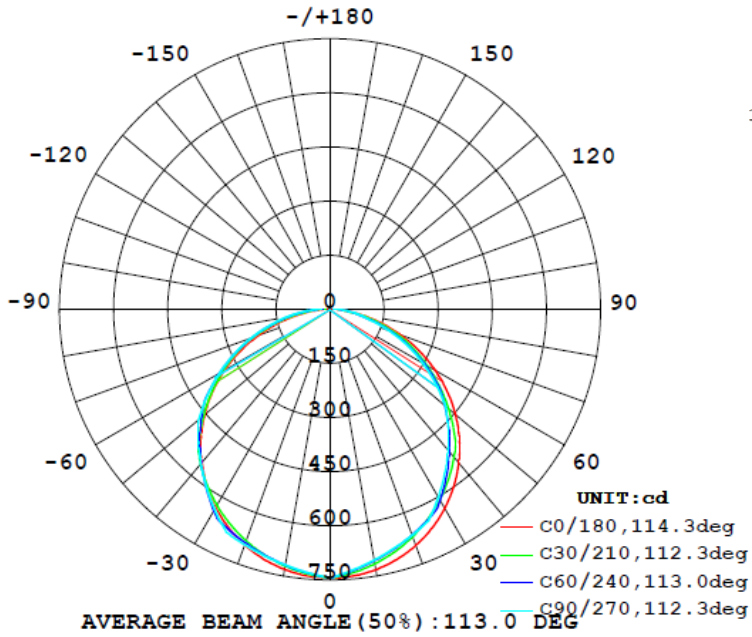

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2FT 25W



Flux out:1884 lm

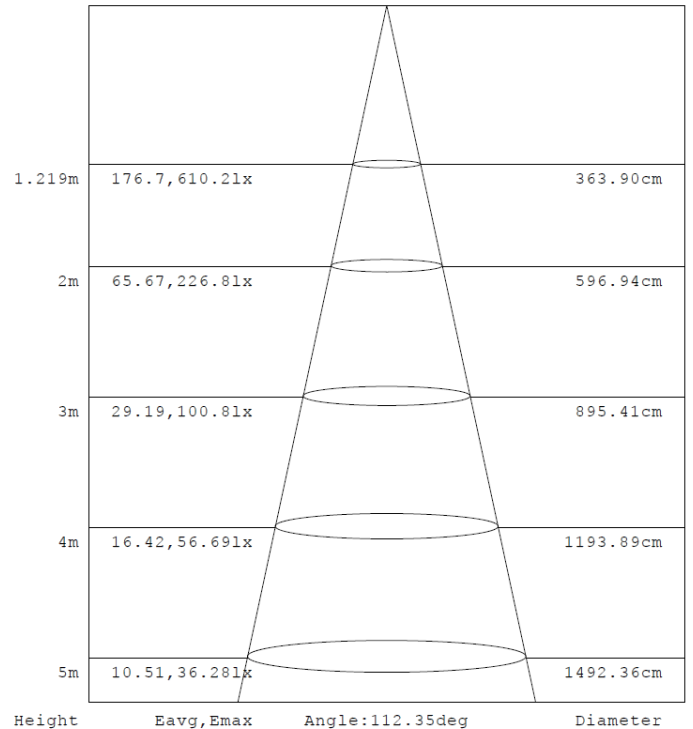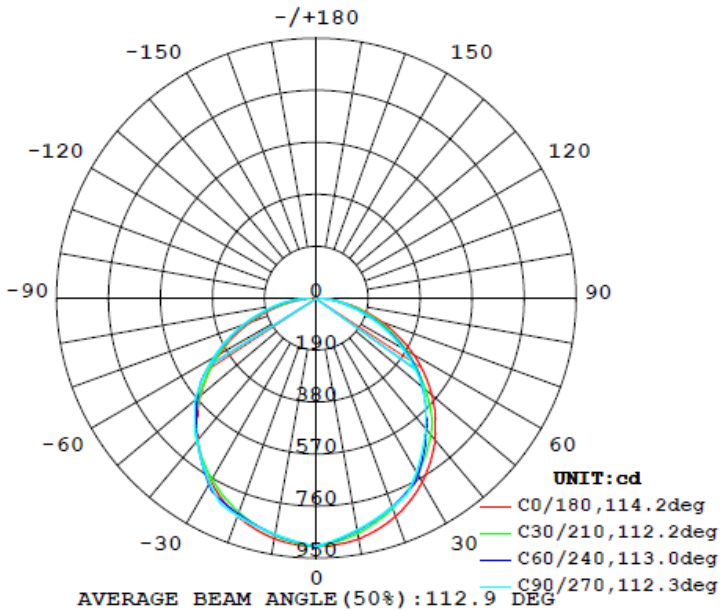

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2FT 30W



Flux out: 2225 lm

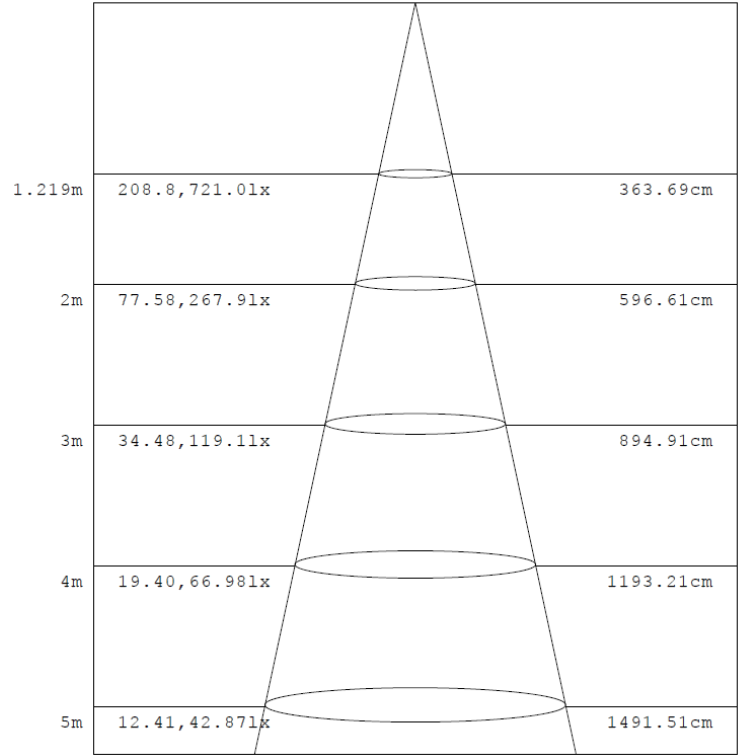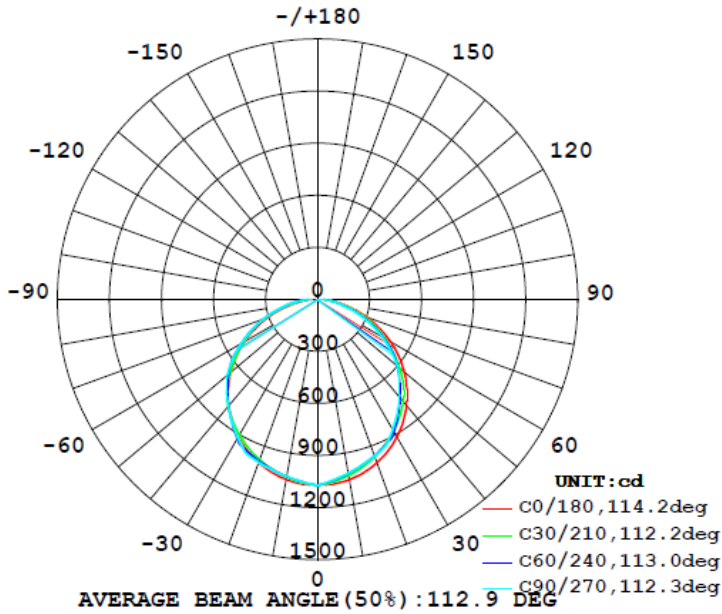

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

4FT 25W



Flux out: 2673 lm

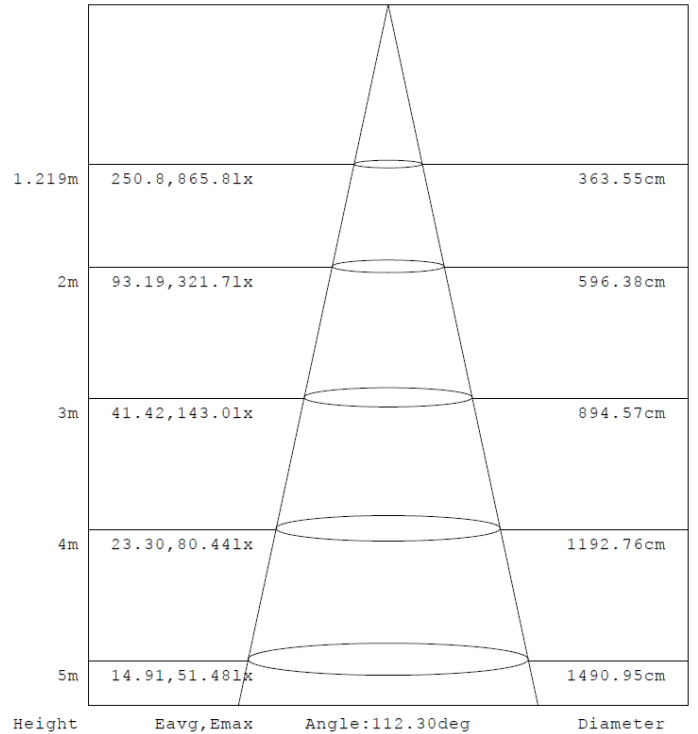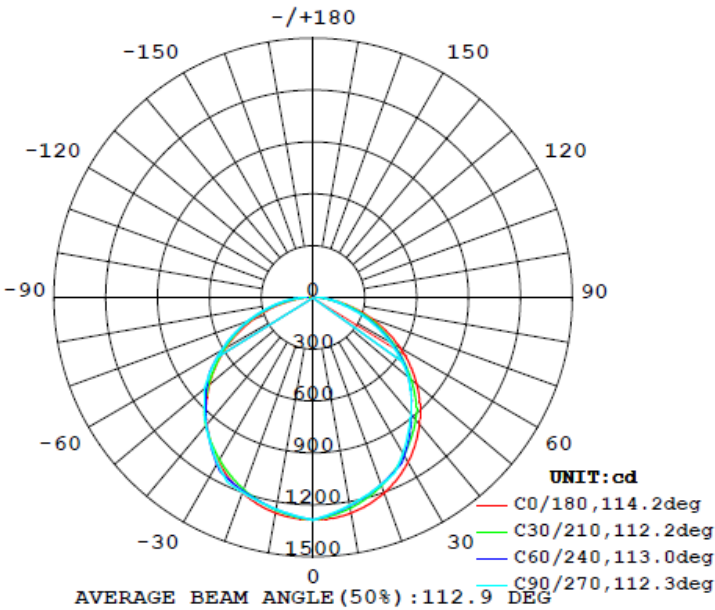

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

4FT 35W



Flux out:1471 lm

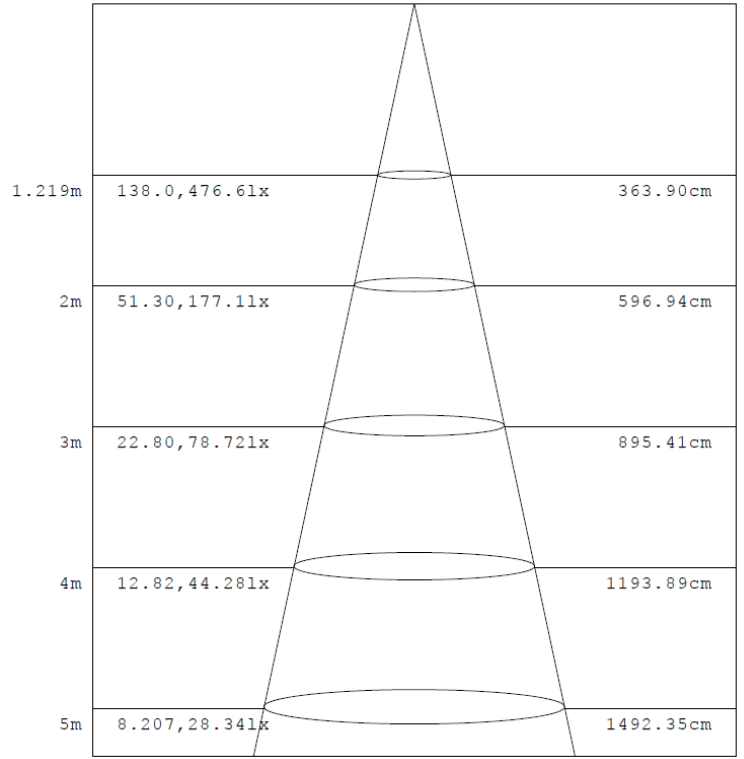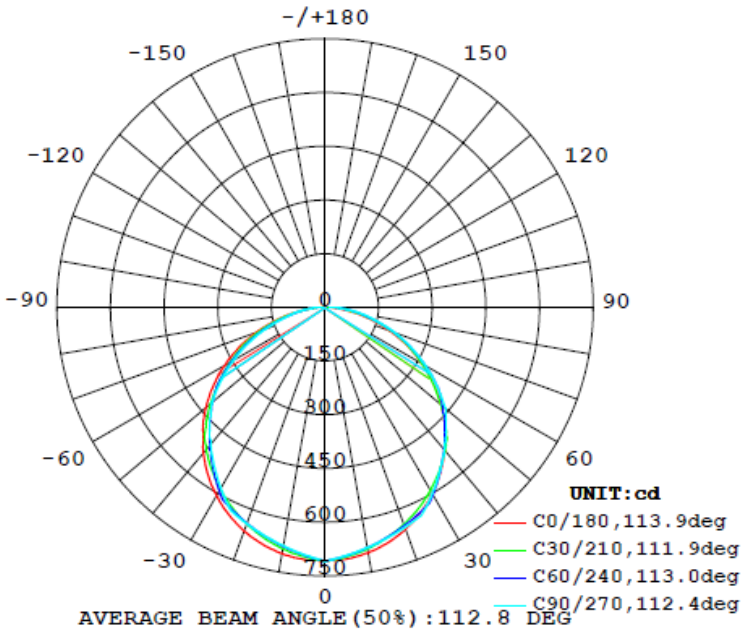

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

4FT 50W

Flux out:1866 lm

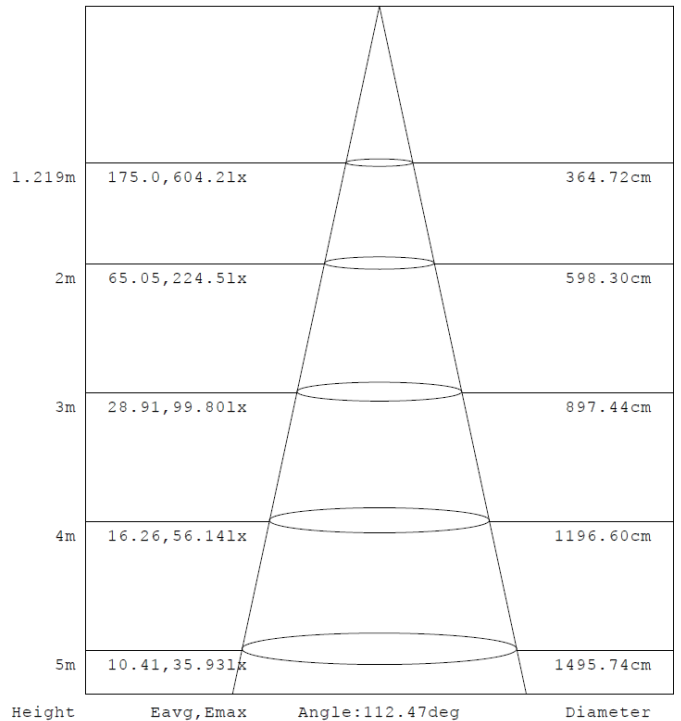
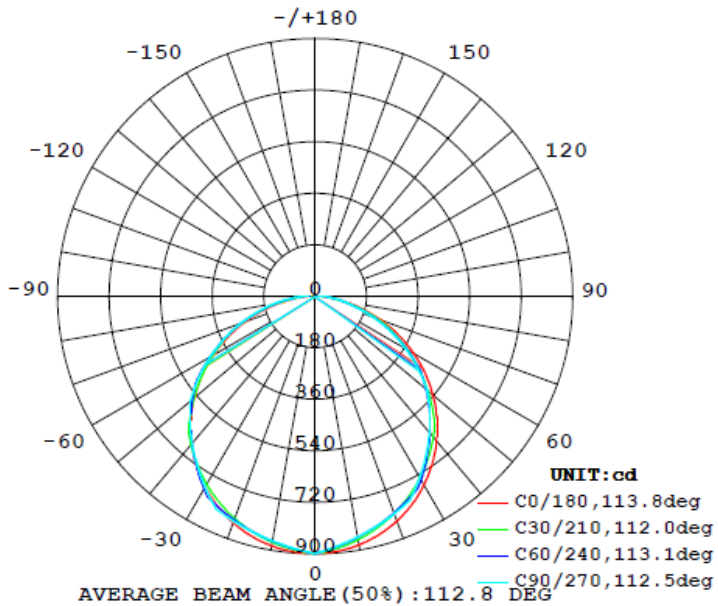


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

PHOTOMETRIC DATA

8FT 60W



Flux out: 2208 lm

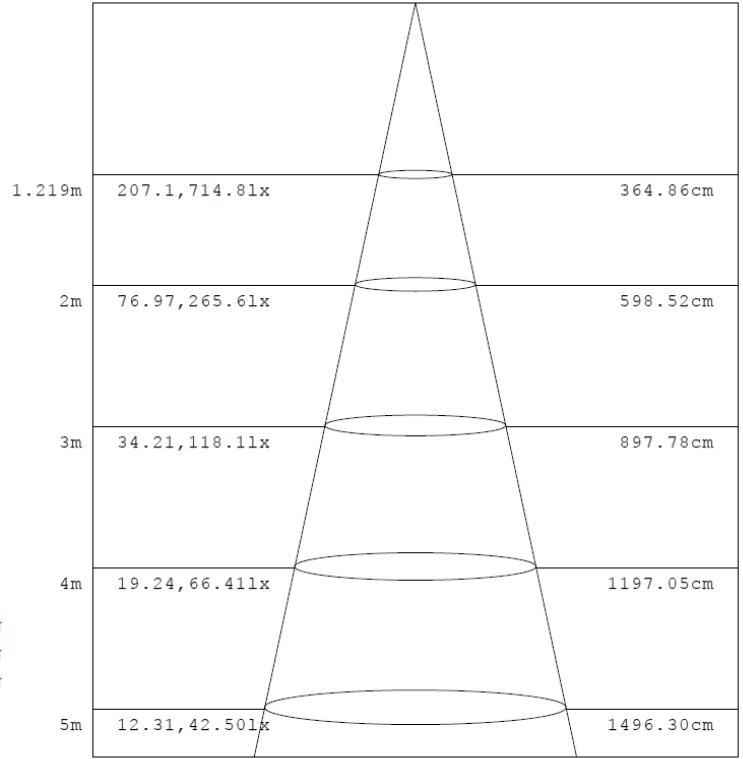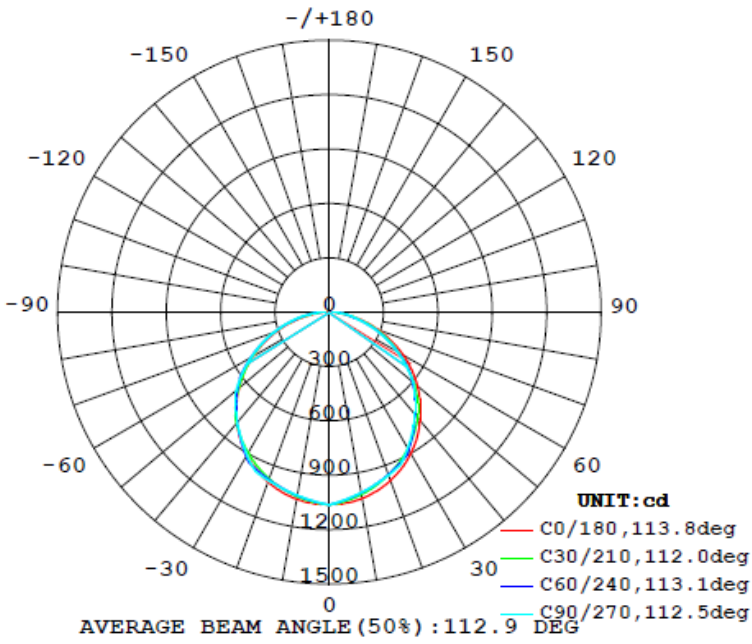

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

8FT 75W

Flux out: 2713 lm

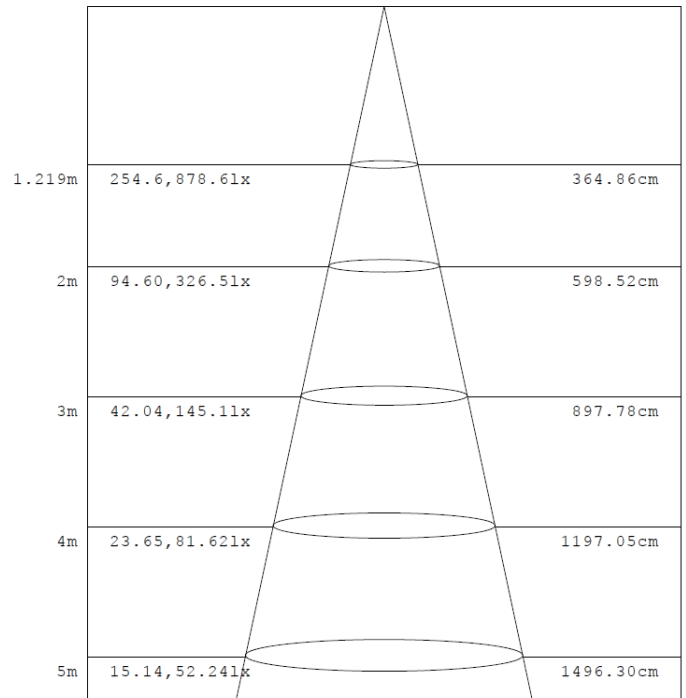
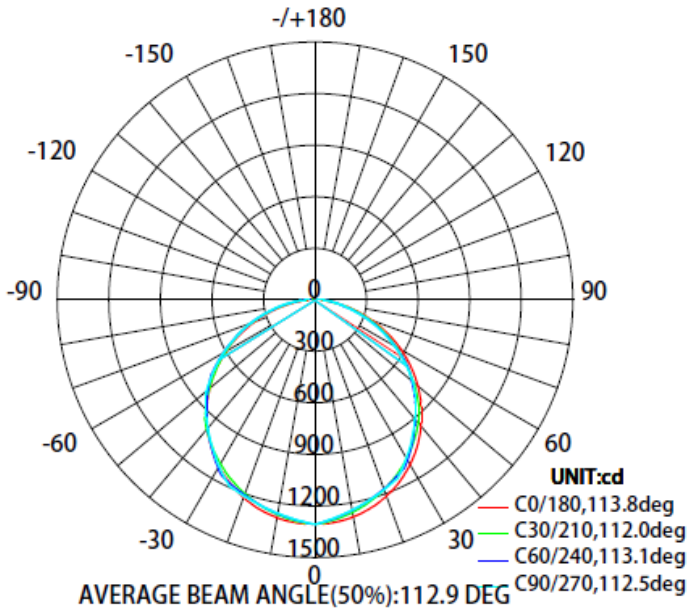


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

PHOTOMETRIC DATA

8FT 90W

Flux out: 2911 lm

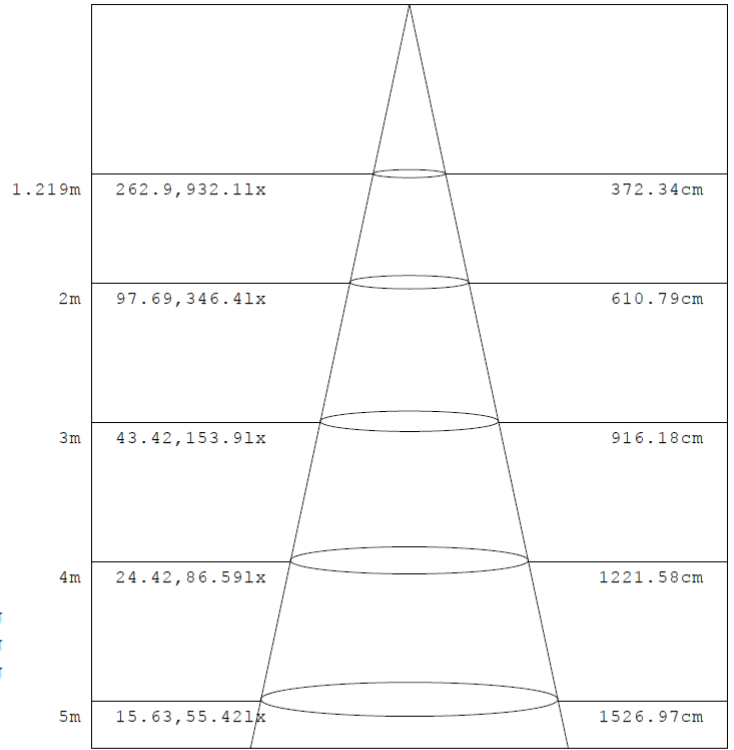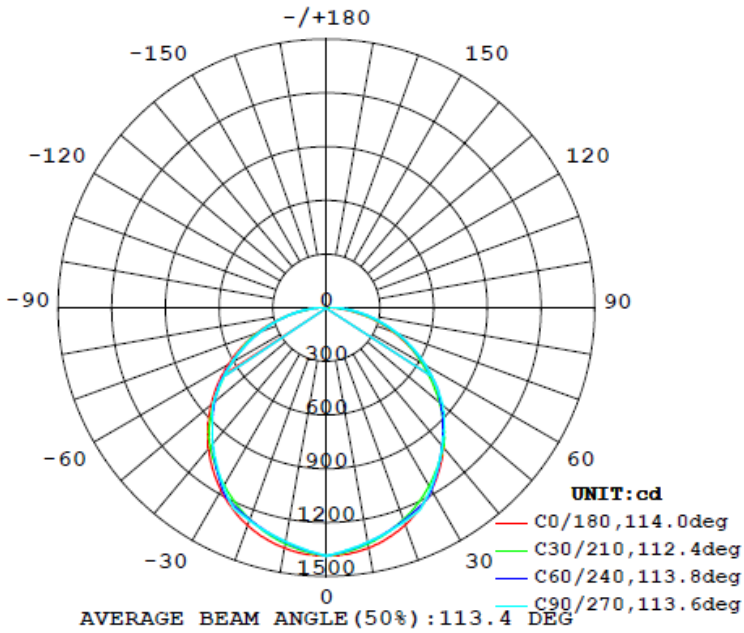

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

MOUNTING OPTIONS

Surface Mount



Recessed Mount



OPTIONAL ACCESSORIES

Emergency Back-up



Sensor

