

Date: _____ Location: _____
 Product: _____ Project: _____
 Quantity: _____ Catalog #: _____

LED MW MCCT Mini Wall Pack Light Series



FEATURES

- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- Semi cut-off
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

Special Order:

- Other colors
- Clear lens

CONSTRUCTION:

Heavy die-cast aluminum housing with polyester powder-coated finish. Integral secondary heat sink to optimize thermal transfer and maximize performance of the LEDs. Frosted lens.

OPTICAL SYSTEM:

Philips Lumileds 3030 LED chips. High quality tempered glass optics. 125° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Wall Mounting with quick mount back plate for easy installation.


CONTROLS & DIMMING:

Photocell included.



MODEL NUMBER	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-MWP-MW(8/10/15/25)MCCT(30/40/50)	8W	1,040LM	130LM/W	75	0.9	20%	30W - 50W HID
LOC-MWP-MW(8/10/15/25)MCCT(30/40/50)	10W	1,300LM	130LM/W	75	0.9	20%	30W - 50W HID
LOC-MWP-MW(8/10/15/25)MCCT(30/40/50)	15W	1,950LM	130LM/W	75	0.9	20%	30W - 50W HID
LOC-MWP-MW(8/10/15/25)MCCT(30/40/50)	25W	3,250LM	130LM/W	75	0.9	20%	30W - 50W HID

Series	Wattage	Color Temperature
LOC-MWP-MW	8W 10W 15W 25W	3000K 4000K 5000K


MEASUREMENTS

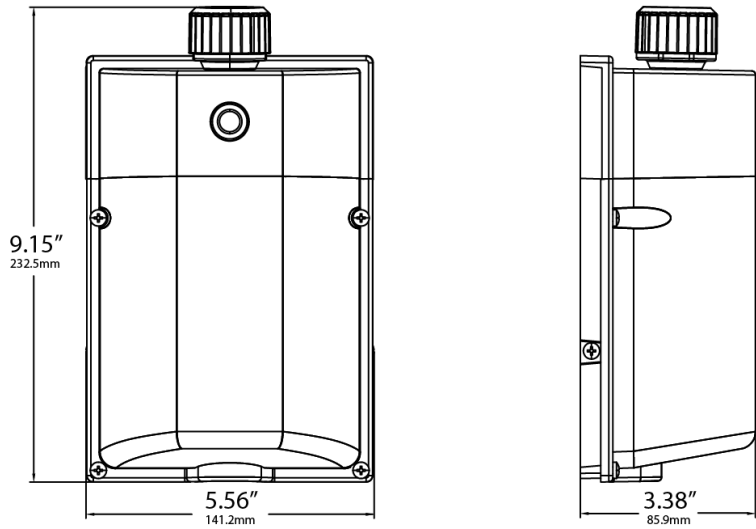


MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-MWP-MW(8/10/15/25)MCCT(30/40/50)	1	2.10 lbs	00810050941587
LOC-MWP-MW(8/10/15/25)MCCT(30/40/50) (white color)	1	2.10 lbs	00810050941594

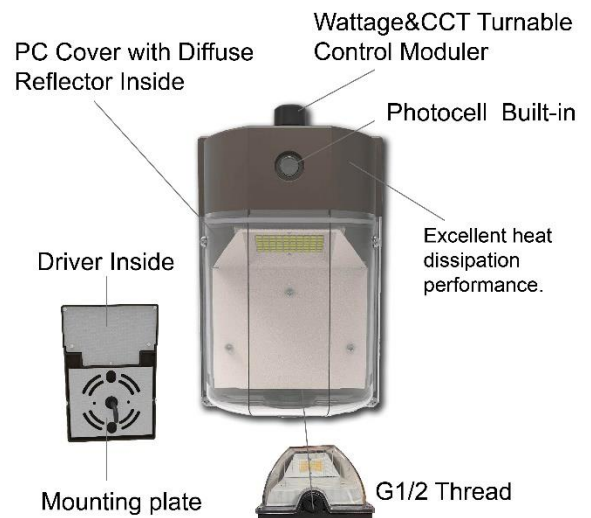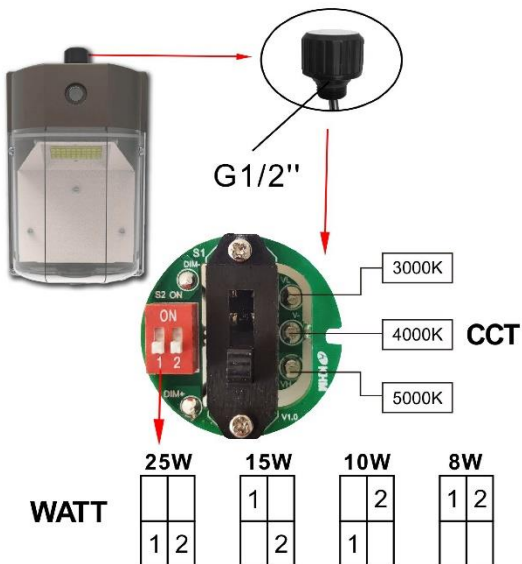


8W

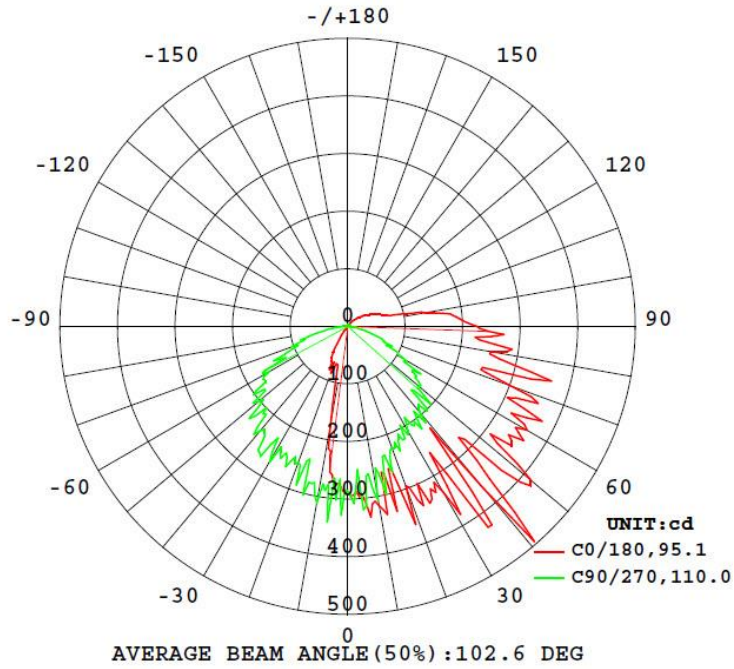

10W


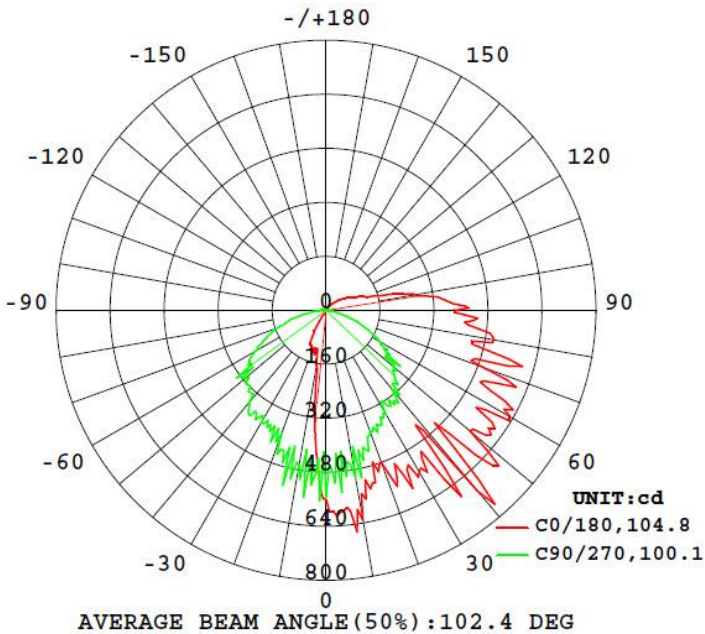


Flux out: 690.2 lm

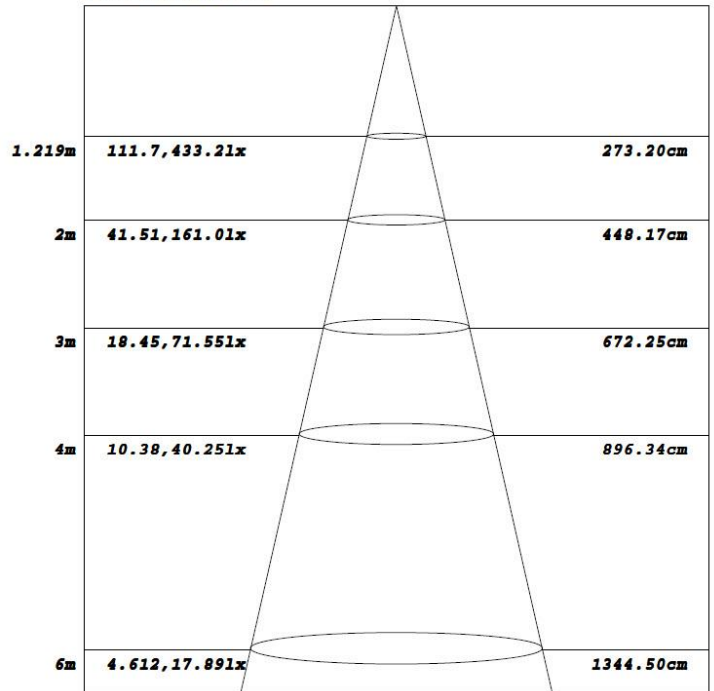



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

15W

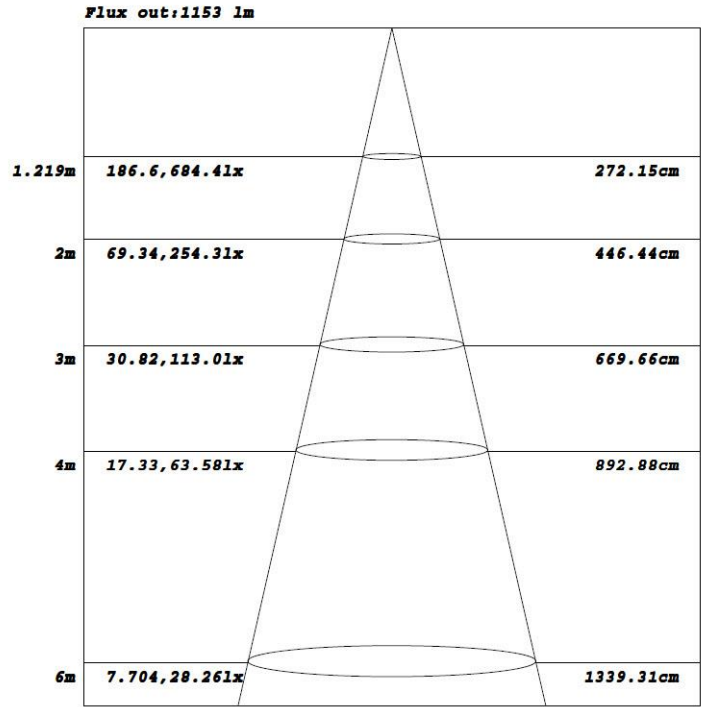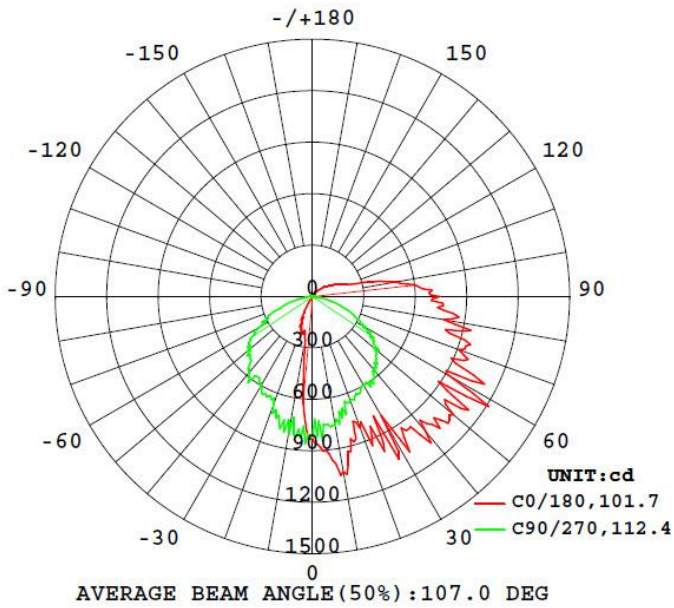

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

25W

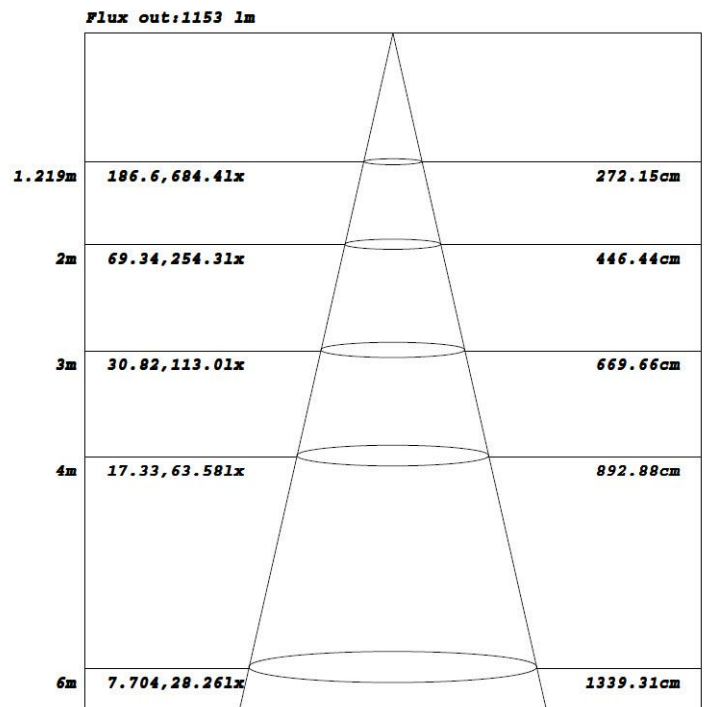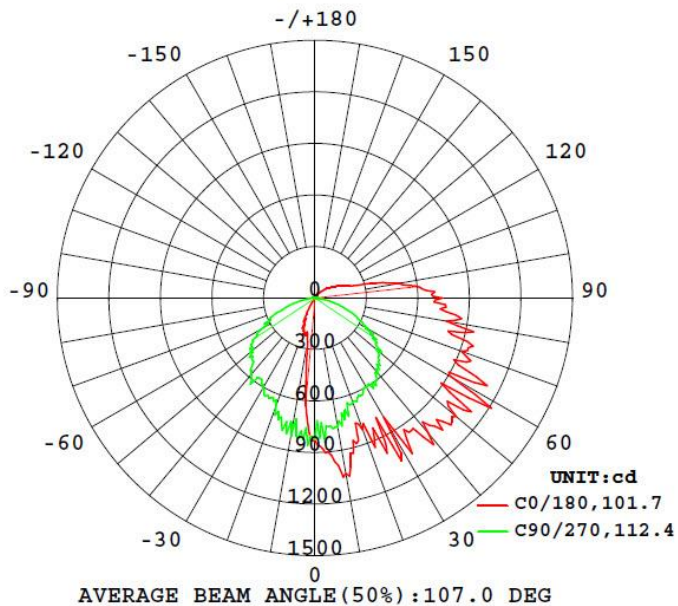

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.