

LED LOC-SL Multi Watt Multi CCT Strip Light Series

FEATURES

- Default Wattage is the highest wattage:
 - 4 Foot – 44W
 - 8 Foot – 90W
- Default CCT: 5,000K
- Linkable:
 - 4 Foot – up to 20 pieces
 - 8 Foot – up to 10 pieces
- 50,000 hours lifetime

4 Foot



8 Foot



SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

CONSTRUCTION:

OPTICAL SYSTEM:

Seoul 2835 LED chips. High quality tempered glass optics. 120° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C

INSTALLATION & MOUNTING:

Hanging chain, surface mount or J-adaptor. These can link together. See above features for how many.

CONTROLS & DIMMING:


0-10V dimming comes standard.



MODEL NUMBER – 3,500K 4,000K 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-4FTSL-MW(22/28/36/44)MCCT(35/40/50)DF	22W	2,862.2LM	130.1LM/W	80	0.9	20%	W
LOC-4FTSL-MW(22/28/36/44)MCCT(35/40/50)DF	28W	3,642.8LM	130.1LM/W	80	0.9	20%	W
LOC-4FTSL-MW(22/28/36/44)MCCT(35/40/50)DF	36W	4,683.6LM	130.1LM/W	80	0.9	20%	W
LOC-4FTSL-MW(22/28/36/44)MCCT(35/40/50)DF	44W	5,726.9LM	129.77LM/W	84	0.9739	6.82%	W
LOC-8FTSL-MW(48/68/90)MCCT(35/40/50)DF	48W	6,590.4LM	137.3LM/W	80	0.9	20%	W
LOC-8FTSL-MW(48/68/90)MCCT(35/40/50)DF	68W	9,336.4LM	137.3LM/W	80	0.9	20%	W
LOC-8FTSL-MW(48/68/90)MCCT(35/40/50)DF	90W	12,062LM	138.98LM/W	84.1	0.9784	13.42%	W

Series	Size	4FT Wattage	8FT Wattage	Color Temperature	Dimming	Material
LOC-SL	4FT = 4 foot	22W	48W	3500K	Dimmable	F = Frosted Lens
	8FT = 8 foot	28W	68W	4000K		
		36W	90W	5000K		
		44W				

MEASUREMENTS

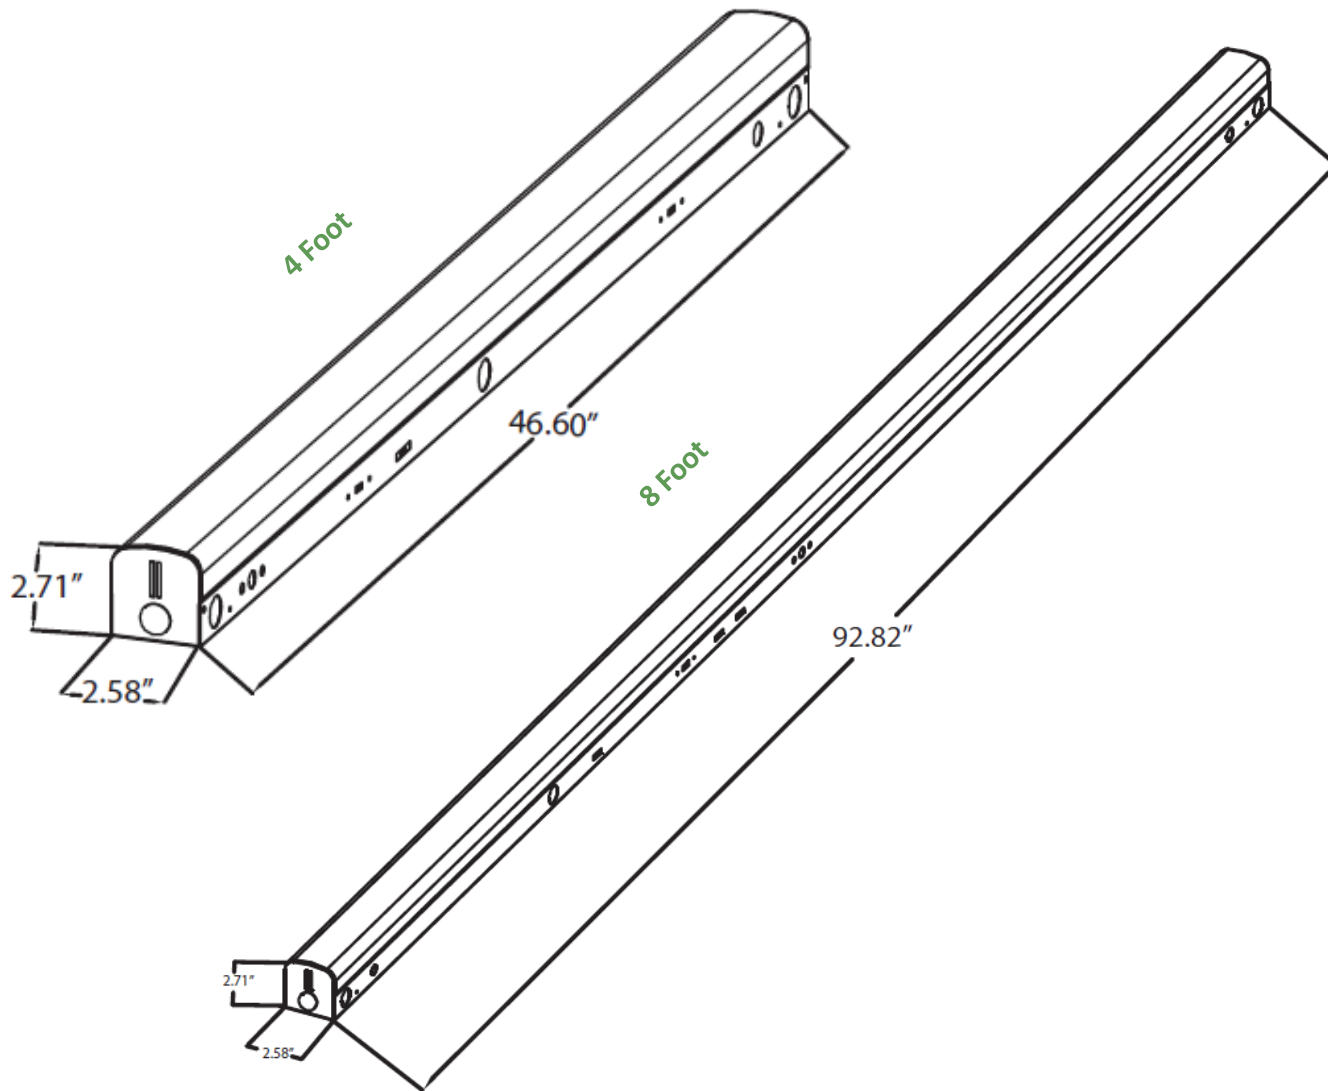

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-4FTSL-MW(22/28/36/44)MCCT(35/40/50)DF	1	lbs	00810050940108
LOC-8FTSL-MW(48/68/90)MCCT(35/40/50)DF	1	lbs	0081