


Date: \_\_\_\_\_ Location: \_\_\_\_\_  
 Product: \_\_\_\_\_ Project: \_\_\_\_\_  
 Quantity: \_\_\_\_\_ Catalog #: \_\_\_\_\_

## LED LOC-SQCP MW MCCT Canopy Light

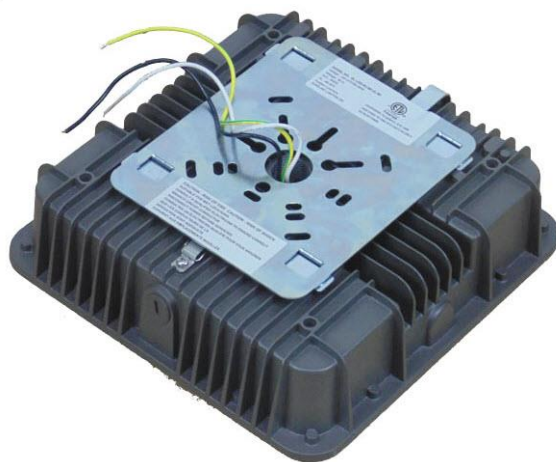

### FEATURES

- Default Wattage: 75W
- Default CCT: 5,000K
- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- 50,000 hours lifetime

### SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

#### CONSTRUCTION:

Heavy die-cast aluminum housing with polyester powder-coated finish

#### OPTICAL SYSTEM:

Seoul 2835 LED chips. Frosted lens. 135° beam angle.

#### WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

#### ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

#### INSTALLATION & MOUNTING:

Wall Mounting with quick mount back plate for easy installation.

#### CONTROLS & DIMMING:

0-10V dimming comes standard.



MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-SQCP-MW(40/50/60/75)MCCT(30/40/50)DLV	40W	5,200LM	130LM/W	70	0.9	20%	100W – 320W HID
LOC-SQCP-MW(40/50/60/75)MCCT(30/40/50)DLV	50W	6,500LM	130LM/W	70	0.9	20%	100W – 320W HID
LOC-SQCP-MW(40/50/60/75)MCCT(30/40/50)DLV	60W	7,800LM	130LM/W	70	0.9	20%	100W – 320W HID
LOC-SQCP-MW(40/50/60/75)MCCT(30/40/50)DLV	75W	9,750LM	130LM/W	70	0.9	20%	100W – 320W HID


#### DLC Product ID:

- LOC-SQCP-MW(40/50/60/75)MCCT(30/40/50)DLV -

# LED LOC-SQCP MW MCCT Canopy Light

Series	Wattage Options	Color Temperature Options	Dimming	Voltage
LOC-SQCP	40W 50W 60W 75W	3000K 4000K 5000K	D = 0-10V	LV = 120-277V

## MEASUREMENTS

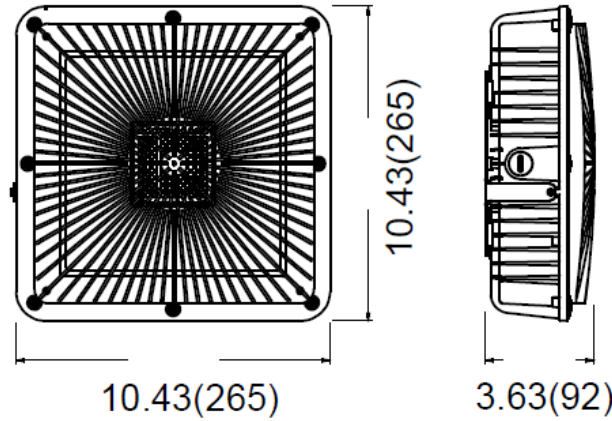

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-SQCP-MW(40/50/60/75)MCCT(30/40/50)DLV	1	lbs	00815586028580

## OPTIONAL ACCESSORIES



Microwave Sensor  
(Compatible with remote control)



Remote Control  
LOC-RC-100