


LED 4FT 17W Type B Series

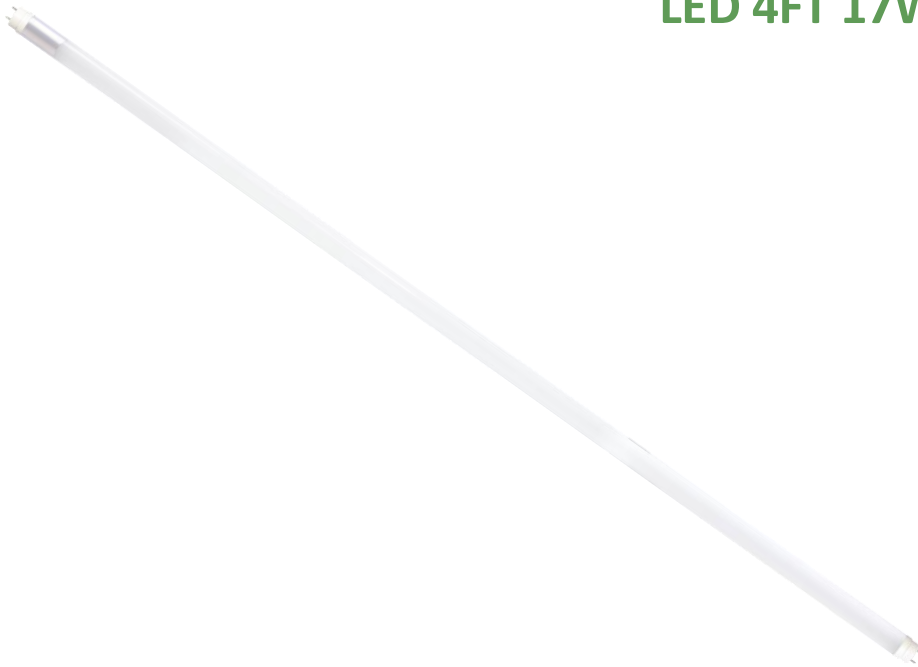

FEATURES

- NSF approved
- Type B Double Ended
- Low thermal decay & maintenance
- No Mercury or UV
- Suitable for enclosed fixtures
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

NSF Model Numbers:

- LOC-T84FT-17W50K-G B
- LOC-T84FT-17W65K-G B

CONSTRUCTION:

Glass body with PET film and soft light.

OPTICAL SYSTEM:

LED chips. 240° beam angle

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. double ended is available which can be compatible with shunted or non-shunted sockets. -20°C to 50°C, -4°F to 122°F.


INSTALLATION & MOUNTING:

Type B double ended.

MODEL NUMBER	CCT	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-T84FT-17W50K-G B	5,000K	17W	2,200LM	130LM/W	80	0.9	15%	W – W
LOC-T84FT-17W65K-G B	6,500K	17W	2,200LM	130LM/W	80	0.9	15%	W – W

Series	Type	Wattage	CCT Options	Lens	Power
LOC	T8 4 Foot	17W	5000K 6500K	Frosted Glass	Type B

MEASUREMENTS

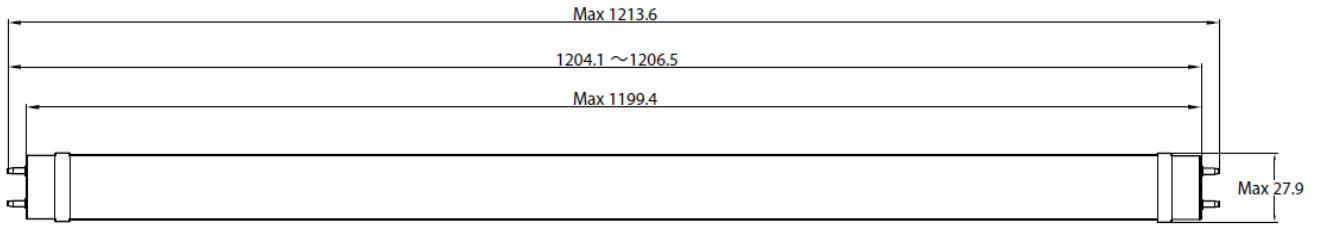

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-T84FT-17W50K-G B	1	0.46 lbs	00810050941297
LOC-T84FT-17W65K-G B	1	0.46 lbs	00810050941303

PHOTOMETRIC DATA

