

LED 4FT Type B Tube Series



FEATURES

- NSF approved
- Type B Single or Double Ended
- Shatterproof glass
- Low thermal decay & maintenance
- No Mercury or UV
- NOT suitable for enclosed fixtures
- 50,000 hours lifetime
- NSF rated for splash zone and non-food zone

SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

CONSTRUCTION:

Shatterproof glass body with PET film and soft light, and PC cap.

OPTICAL SYSTEM:

2835 LED chips. 190° beam angle

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input.
-20°C to 45°C, -4°F to 113°F

INSTALLATION & MOUNTING:

Type B single or double ended.

NSF Model Numbers:

- LOC-4FTT8GP-9W40K
- LOC-4FTT8GP-9W50K
- LOC-4FTT8GP-12W40K
- LOC-4FTT8GP-12W50K




MODEL NUMBER	CCT	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-T84FT-9W40KGF B	4,000K	9.3W	1,750LM	194.44LM/W	83	0.9	20%	32W – 36W HID
LOC-T84FT-9W50KGF B	5,000K	9.3W	1,750LM	194.44LM/W	83	0.9	20%	32W – 36W HID
LOC-T84FT-12W40KGF B	4,000K	12W	2,000LM	166.7LM/W	83	0.9	20%	32W – 36W HID
LOC-T84FT-12W50KGF B	5,000K	12W	2,000LM	166.7LM/W	83	0.9	20%	32W – 36W HID

DLC Product ID:

- LOC-T84FT-9W40KGF B - S-3BC78I
- LOC-T84FT-9W50KGF B - S-QCWSF8
- LOC-T84FT-12W40KGF B - S-7XLR8T
- LOC-T84FT-12W50KGF B - S-GMWNO4

Series	Type	Wattage	CCT Options	Lens	Power
LOC	T8 4 Foot	9W 12W	4000K 5000K	Frosted	B – Type B

MEASUREMENTS

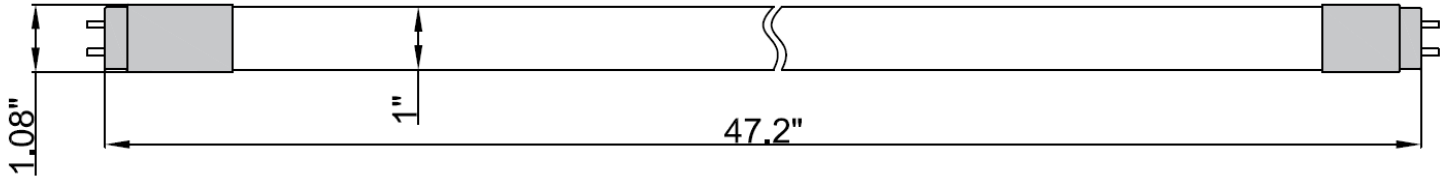

MODEL NUMBER	QUANTITY	WEIGHT	UPC CODE
LOC-T84FT-9W40KGF B	1	0. lbs	00810050942635
LOC-T84FT-9W50KGF B	1	0. lbs	00810050942645
LOC-T84FT-12W40KGF B	1	0. lbs	00815586023677
LOC-T84FT-12W50KGF B	1	0. lbs	00815586023707