


PRODUCT DESCRIPTION:

Designed to fit any ceiling surface. Suspended and hanging for other types of ceilings such as art galleries, homes, schools, offices, hotels, restaurants, retail stores and other commercial or industrial applications.

FEATURES:

- Low maintenance
- Environmentally friendly
- No mercury
- Recyclable

DIMENSIONS:

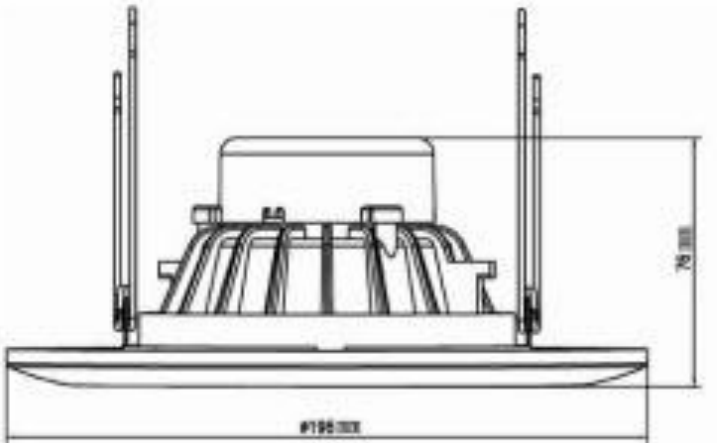

6" Gimbal Downlight 15W Spec

LOD-DL6EB-15W30K

LOD-DL6EB-15W50K



SPECIFICATIONS:

SPECIFICATION	Details	
Model	LOD-DL6EB-15W30K	LOD-DL6EB-15W50K
Input Wattage (W)	15W	
Lumens Delivered (LM)	1,010LM	1,060LM
Efficacy (LM/W)	67.3LM/W	70.7LM/W
Color Temperature	3,000K	5,000K
Power Factor	0.97	0.97
CRI	90	90
Wattage Equivalent	75W	
Dimmable	Yes	
IP Rating	Damp Location	
Beam Angle		
Input Voltage	AC120	
Lifespan	50,000 hrs	
Housing	Aluminum	
Lens	Frosted	
Mounting	GU24 or E26	
Size	7.72" x 2.99"	
Certification	ES, ETL, FCC, CE RoHS, TUV, ISO9001	
Operating Temperature	-20°C to 50°C (-4°F to 122°F)	
Environment	Indoor	
Warranty	3 years limited	



Easy to Install in 3 Easy Steps:



Step1: Twist adaptor into socket.



Step2: Insert male connector into female one.



Step3: Insert LED trim.