


## PRODUCT DESCRIPTION:

Designed to fit any ceiling surface. Suspended and hanging for other types of ceilings such as art galleries, homes, schools, offices, hotels, restaurants, retail stores and other commercial or industrial applications.

## FEATURES:

- Low maintenance
- Environmentally friendly
- No mercury
- Recyclable

## DIMENSIONS:

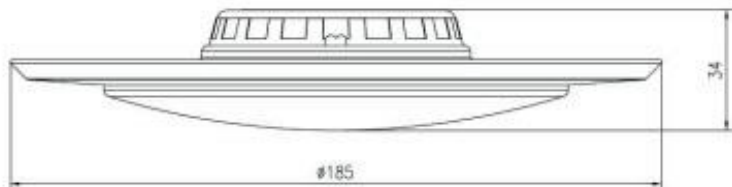

## 6" Surface Mount Downlight 15W Spec

LOD-DL6SM-15W50K



**SPECIFICATIONS:**

SPECIFICATION	Details
Model	LOD-DL6SM-15W50K
Input Wattage (W)	15W
Lumens Delivered (LM)	1,050LM
Efficacy (LM/W)	70LM/W
Color Temperature	5,000K
Power Factor	0.98
CRI	93
Wattage Equivalent	75W
Dimmable	Yes
IP Rating	Damp Location
Beam Angle	
Input Voltage	AC120
Lifespan	50,000 hours
Housing	Aluminum
Lens	Frosted
Mounting	GU24 or E26
Size	7.28" x 1.34"
Certification	ES, ETL, FCC, CE RoHS, TUV, ISO9001
Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Environment	Indoor
Warranty	3 years limited

