


PRODUCT DESCRIPTION:

The area light is mostly used for industrial and commercial applications such as road and area lighting, parking decks, auto dealerships, high masts, housing complexes, shopping malls, sporting complexes and fields, parks and recreational areas and municipal lots.

FEATURES:

- Driver on board
- Heavy duty die-cast aluminum housing
- 10kV surge protection
- Fully sealed to be dirt and bug proof
- High quality tempered glass optics
- Integral secondary heat sink to optimize thermal transfer and maximize performance
- Driver is mounted in direct contact with the casting for low operating temperature and long life
- Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling

DIMENSIONS:

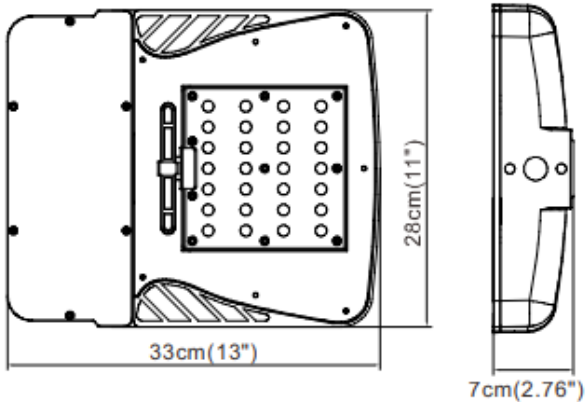

Area Light 100W Spec

LOD-HLAL-T3100WD50K-V2



SPECIFICATIONS:

| SPECIFICATION | Details |
|-----------------------|-------------------------------------|
| Model | LOD-HLAL-T3100WD50K-V2 |
| Input Wattage (W) | 100W |
| Lumens Delivered (LM) | 12,000LM |
| Efficacy (LM/W) | 120LM/W |
| CRI | 70 |
| Lifespan | 50,000 hours |
| Color Temperature | 5,000K |
| Wattage Equivalent | 200W |
| Dimmable | No |
| IP Rating | IP65 |
| Beam Angle | 120 |
| Input Voltage | AC100-277V |
| Power Factor | 0.99 |
| Housing | Aluminum |
| Lens | Clear |
| THD | 15% |
| Mounting | Pole / Arm |
| Weight (LBS) | lbs |
| Size | 13" x 11" x 2.76" |
| Certification | DLC, UL, FCC, CE RoHS, TUV, ISO9001 |
| Operating Temperature | -40°C to 50°C |
| Environment | Outdoor |
| Warranty | 5 years limited |

