


PRODUCT DESCRIPTION:

The area light is mostly used for industrial and commercial applications such as road and area lighting, parking decks, auto dealerships, high masts, housing complexes, shopping malls, sporting complexes and fields, parks and recreational areas and municipal lots.

FEATURES:

- Driver on board
- Heavy duty die-cast aluminum housing
- 10kV surge protection
- Fully sealed to be dirt and bug proof
- High quality tempered glass optics
- Integral secondary heat sink to optimize thermal transfer and maximize performance
- Driver is mounted in direct contact with the casting for low operating temperature and long life
- Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling

DIMENSIONS:

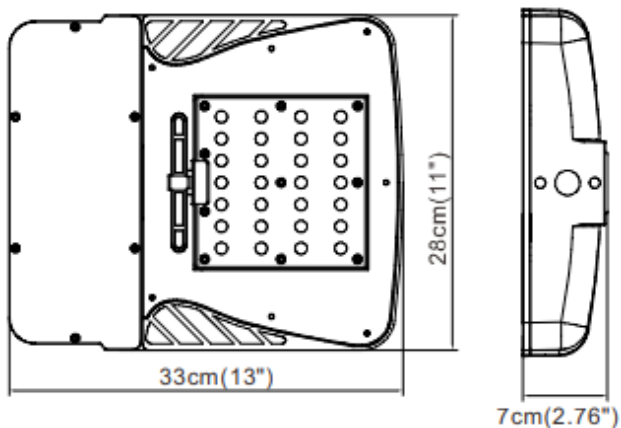

Area Light 75W Spec

LOD-HLAL-T375WD50K-V2



SPECIFICATIONS:

SPECIFICATION	Details
Model	LOD-HLAL-T375WD50K-V2
Input Wattage (W)	75W
Lumens Delivered (LM)	9,200LM
Efficacy (LM/W)	123LM/W
CRI	70
Lifespan	50,000 hours
Color Temperature	5,000K
Wattage Equivalent	200W
Dimmable	No
IP Rating	IP65
Beam Angle	120
Input Voltage	AC100-277V
Power Factor	0.99
Housing	Aluminum
Lens	Clear
THD	15%
Mounting	Pole / Arm
Weight (LBS)	lbs
Size	13" x 11" x 2.76"
Certification	DLC, UL, FCC, CE RoHS, TUV, ISO9001
Operating Temperature	-40°C to 50°C
Environment	Outdoor
Warranty	5 years limited

